

This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

#### Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

- + Make non-commercial use of the files We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
- + Refrain from automated querying Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
- + Maintain attribution The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
- + Keep it legal Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

#### About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at http://books.google.com/

# PROCEEDINGS

OF

# THE ENGINEERS' CLUB

OF

### PHILADELPHIA

**VOLUME XVII** 

EDITED BY THE PUBLICATION COMMITTEE

PHILADELPHIA

THE ENGINEERS' CLUB OF PHILADELPHIA

1900

THE NEW PUBLIC LIBRAR 255379

ASTOR, LENGX AND TILDEN FO INDATICAS 1902

ì

.1

# INDEX.

· · · · · · · · · · · · · · · · · · ·	AGE
Abbott, A. C., The Utilization of Bacteria in Sanitary Engineering,	47
Abstract of Minutes of Board of Directors,	)5, 246
of Club,	
Additions to Library,	
Annealing Armor-plate, Electric Process for,	12
Annual Address of President,	1
Report of Board of Directors,	43
Armor-plate Annealing,	12
d'Auria, L., Discussion on Pumping-engines,	
Birkinbine, J., Discussion on Bacteriologic Methods,	62
Philadelphia Lowlands,	126
CANADIAN Pacific Railroad from Laggan to Revelstoke,	64
Chance, H. M., Austin Dam,	204
Discussion on Water-jet,	228
Christie, James, Discussion on Needs of Philadelphia	33
Water-Jet,	25, <b>2</b> 26
Codman, John, Discussion on Pumping Engines,	195
Compressed Air, Transmission of Power by,	230
Gas, Transmission of,	173
Duris, George C., Discussion on Water-jet,	225
Dougherty, C. J., The Electric Process for Annealing Armor-plate,	12
Drainage of Philadelphia Lowlands,	109
Diamage of I miadelphia Lowiands,	100
Ensby, William, Bacterial Treatment of Sewage,	133
Discussion on Application of Bacteria in Engineering, .	57
Eddowes, A. B., Discussion on Street-railway Economy,	10
Eglin, W. C. L., Discussion on Annealing Armor-plate,	22
Electric Process for Annealing Armor-plate,	12
Esthetics and the American Engineer,	1
Falkenau, A., Discussion on Compressed Air Transmission,	40-243
Forstall, W., Discussion on Gas Transmission,	

iv Index.

	PAGE
Furber, W. Copeland, Discussion on Bacteria,	63
Coatings for Metal,	108
Needs of Philadelphia,	10
Street-railway Economy,	10
Water-jet,	228
• • • • • • • • • • • • • • • • • • •	
GAS, Transmission of, at High Pressure,	173
through Pipes,	<b>23</b> 0
Gordon, F. W., Transmission of Gas and Air through Pipes and of Power	004
by Compressed Air,	230
Discussion on Gas-transmission,	181
Hering, Carl, Discussion on Annealing Armor-plate,	23
Street-railway Economy,	10
Hewitt, Charles, The Motorman as an Element in Street-railway Economy,	6
High Pressure Gas Transmission,	173
Leffmann, Henry, Discussion on Treatment of Sewage,	169
Water-jet,	226
Linton, H., Discussion on Bacteria,	61
Little, J. Kay, Discussion on Water-jet,	228
Lowlands of Philadelphia, Protection of,	109
Zowianas or z miaacipma, z rotection or,	100
Maignen, P. A., Discussion on Treatment of Sewage,	170 179
	•
Marburg, Edgar, Discussion on Annealing Armor-plate,	22
Bacteria,	60
Coatings for Metal,	102
Needs of Philadelphia,	36, <b>3</b> 8
Pumping Engines,	194
Street-railway Economy,	10
Metal, Protective Coatings for,	87
Miller, E. F., Discussion on Annealing Armor-plate,	23
Mills, C. M., Discussion on Coatings for Metal,	104
Modern Methods of Gas Manufacture,	173
Morris, Henry E., Discussion on Needs of Philadelphia,	34
The Pumping Engines of the City of Philadelphia,	185
Motorman as an Element in Street-milway Economy,	6
Nichols, E. M., Discussion on Bacteria,	61
Pumping Engines,	194
Tamping ingines,	104
Osborne, Richard Boyce, Obituary of,	201
Osbourn, H. V. B., Philadelphia: What Are Its Needs?	24
	~ •
PHILADELPHIA Lowlands, Protection of,	109
What Are Its Needs?	24

Index. v

	PAGE
Protection of Philadelphia Lowlands,	109
Protective Coatings for Metals,	87
Richards, J. T., Discussion on Coatings for Metals,	107
Sabin, A. H., The Theory and Practice of Protective Coatings for Metals,	87
Sadtler, S. P., Discussion on Coatings for Metals,	103
Schermerhorn, L. Y., Discussion on Coatings for Metals,	107
Gas Transmission,	182
Protection of Philadelphia Lowlands,	123
Needs of Philadelphia,	31
Pumping Engines,	193
Sewage Purification,	171
Water-jet as an Aid to Engineering Construction, .	207
Schumann, Francis, Esthetics and the American Engineer,	1
Sewage, Bacterial Treatment of,	133
Shelton, F. H., Modern Methods of Gas Manufacture, with a Description	
of its Transmission under High Pressure,	173
Souder, Harrison, The Drainage and Protection of the Philadelphia Low-	
lands,	109
THEORY and Practice of Protective Coatings for Metals,	87
Trautwine, John C., Jr., Discussion on Bacteria,	
Needs of Philadelphia	<b>37, 3</b> 8
Pumping Engines,	195
UTILIZATION of Bacteria and Bacteriologic Methods in Sanitary En-	400
gineering,	47
Vaux, William S., Jr., The Canadian Pacific Railway from Laggan to	
Revelstoke,	64
WATER and Water-supplies (Thresh), review,	199
Water-jet as an Aid to Engineering Construction,	207
Webster, W. R., Discussion on Needs of Philadelphia.	37

## THE ENGINEERS' CLUB OF PHILADELPHIA

1122 Girard Street

#### OFFICERS FOR 1900

President
EDGAR MARBURG

Vice-Presidents

Term Expires January, 1901

Term Expires January, 1902

HENRY LEFFMANN

LOUIS Y. SCHERMERHORN

Directors

MINFORD LEVIS

Term Expires January, 1901

HARRISON SOUDER

W. PENN EVANS

JAMES CHRISTIE

Term Expires January, 190?

CHARLES PIEZ

EDWIN F. SMITH

Secretary

L. F. RONDINELLA

Treasurer

GEORGE T. GWILLIAM

#### STANDING COMMITTEES OF BOARD OF DIRECTORS

Finance—Edwin F. Smith, Henry Leffmann, Minford Levis.

Membership—Charles Piez, James Christie, Harrison Souder.

Publication—Henry Leffmann, James Christie, Edwin F. Smith.

Library—Harrison Souder, Louis Y. Schermerhorn, W. Penn Evans.

Information—Louis Y. Schermerhorn, Charles Piez, Minford Levis.

House—Minford Levis, W. Penn Evans, Edwin F. Smith.

#### SPECIAL COMMITTEES OF THE CLUB

Relations of the Engineering Profession to the Public-John Birkinbink, Chairman. New Club House-W. Copkland Furber, Chairman.


#### MEETINGS

Annual Meeting-3d Saturday of January, at 8 P.M.

Stated Meetings—1st and 3d Saturdays of each month, at 8 P.M., except between the fourteenth days of June and September.

Business Meetings—When required by the Constitution or By-Laws, when ordered by the President or the Board of Directors, or on the written request of five Active Members of the Club.

The Board of Directors meets at 4 P.M. on the 3d Saturday of each month, except July and August.

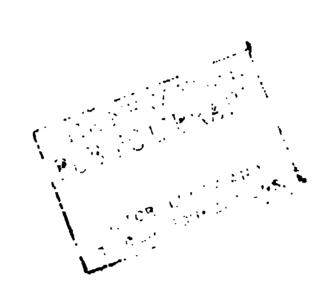

•

.

.

### SOME NOTES ON THE MOTORMAN AS AN ELEMENT IN STREET RAILWAY ECONOMY.

#### CHARLES HEWITT.

Read December 2, 1899.

For several years past articles have appeared in the technical press claiming that the motorman is very inefficient as a machine, and various devices for overcoming this inefficiency have been advocated. Prominent among these are car circuit-breakers, which are set to open automatically at a predetermined load; recording watt-meters, The last, invented by Cravath, of and the Cravath recorder. Chicago, consists of a long flat strip of fusible metal, resting on which is a wire that carries the current used by the car. By a certain current the wire is heated sufficiently to melt the fusible metal, and will continue to melt its way into the soft metal as long as an excess of current is used. The depth of the slot is an indication of the motorman's extravagant use of power. Other devices have been invented intending to offset the lack of judgment on the part of the motorman, and prevent him from using more current than the circumstances warrant.

Being somewhat interested in the matter, and being unable to find in any of the publications exact data as to what the difference in motormen amounted to so far as the power used was concerned, I undertook some tests with this object in view. Many data have been published of reported tests of car-motors in operation, but I think I can show that most of such tests are tests of the motormen rather than of the motors. In order to get at the facts in the case, a regular eighteen-foot car was equipped with a Thomson recording watt-meter. This instrument had been made by the General Electric Company for car-service. It was tested before using and found correct. The car was equipped with two G. E. 800 motors, with four-turn armatures. It was put in regular service and passed from one motorman to another in the regular course of operation. No instruction was given

special instructions, motorman 3910 made four trips on November 11th, and showed an average of 964 watt-hours, or 20 per cent. less than on the previous day, running in the ordinary way; good rail both days. He had no trouble in keeping to schedule, and carried almost as many passengers.

Fifth. In order to show more clearly the difference in the amount of power used per car-mile, I have prepared the two following tables. The first is arranged according to average power used per trip irrespective of motormen, and the second according to the average power per man irrespective of trips:

#### AVERAGE WATT-HOURS PER CAR-MILE PER TRIP.

CHESTNUT HILL	TENTH AND ELE STREETS		KET STREET.		
700	948	86	7 1164		
878	957 (Under	special 86			
941		actions. 88	80 <b>1164</b>		
957	985 J	89	2 1164		
970	1003 1375	90	4 1164		
990	1068 1384	91	7 1177		
990	1115 1384	91	7 1177		
999	1115 1384	91	7 1202		
1037	1133 1412	96	66 1202		
1040	1143 1412	99	1214		
1062	1190 1412	99	1 1226		
1071	1226 1440	99	1239		
1076	1254 1459	100	1239		
1087	1264 1459	101	6 1239		
1095	1273 1496	105	3 <b>1239</b>		
1100	1291 1496	107	78 <b>1251</b>		
1125	1291 1514	107	78 <b>1251</b>		
1160	1301 1598	111	5 1251		
1170	1329 1598	111	5 1263		
1170	1338 1645	111	5 1263		
1187	1356 1645	111	5 1263		
1198	1375 1654	112	27 1273		
1206		112			
1225		112			
1280		114			
		114	1326		
Average per trip:					
Chestnut Hill line,			1068		
Tenth and Elevent					
Market Street line,					
Excess of maximum over average in per cent. of maximum:					
Chestnut Hill line,					
Tenth and Elevent					
Market Street line,	• • • • • •		15.2		

#### DISCUSSION.

A. B. Eddowes.—Was any account taken of the force or direction of the wind: that is, its resistance to the car going over the road? Would not differences in that regard make differences in the percentages?

Mr. Hewitt.—No account was kept of that, nor do I think it would affect the percentages.

EDGAR MARBURG.—Will you kindly explain in detail about the construction of the motor to save power?

Mr. Hewitt.—You mean, I presume, for the special trip on the Tenth and Eleventh Street line. These motors were wound for quick acceleration, and had three turns on the armature instead of four. With these the motorman was able to make his schedule without using the multiple positions. In other words, he ran with the motor in series all the time.

CARL HERING.—What instructions do the motormen receive as to the proper manner of handling the controller?

MR. HEWITT.—It is customary on most roads to put a new man on with an experienced motorman, who acts as a tutor. On some of the smaller roads new motormen are required to serve an apprenticeship in the repair shops. In New York, I believe, a school for motormen has been established, and all new men are given thorough instruction in all that pertains to the car-machinery before they are allowed to run a car.

MR. HERING.—Was the number of stops which the car made taken into consideration, and would not that affect the results?

MR. HEWITT.—The number of stops was intrecorded. I do not think it would vary enough to affect the results to such an extent as the figures show.

W. COPELAND FURBER.—If I understand correctly, the figures in the tables Mr. Hewitt has shown us are the results of individual trips; and, if so, I should like to know if the difference between the maximum and minimum might not be explained by "accidental conditions of loading," such as a foot-ball game, parade, or some public gathering at a local point, which is not apparent in the table, and which, therefore, is—but properly should not be—included in making up the averages.

MR. HEWITT.—Such is not the case. The records are taken for individual trips, but all the trips for any one day are consecutive. During the time these records were taken there were no unusual conditions of travel, and I have shown that the number of passengers seems to have very little influence on the power used.

The Chestnut Hill line is very hilly for about half its length, while the other two lines are quite level. The reason that the average power used on the Tenth and Eleventh Street line is greater than the average on the other two is the different winding of the motor armature. They were three-turn armatures, wound so for rapid acceleration, and the results show that they are not so economical for city service as the four-turn armature.

Mr. Hering.—It seems to me that if so great a saving can be effected by individual motormen in the handling of the controller, it would be worth the ex-

pense to instruct them still more thoroughly by sending an expert with them on some of the trips to give instruction as to the best way to use the controller. While riding on the cars I have often noticed that the motormen seem to move the handle to the last notches altogether too quickly. They should run on the first notches until a certain speed has been obtained, and then go on to the other notches, but they do not do this.

days included, for a period of over six months, and upward of about 3000 holes have been treated.

We have had no difficulty in annealing the harveyized plates of the "Alabama," but in this age of advancement something new is constantly being invented; yesterday it was harveyized nickel-steel, and to-day Krupp's armor plates are considered superior to the Harvey or Corey plates. Krupp armor is now being placed upon all the newer vessels of our own and foreign navies.

The Krupp gas-process, as it is called, is a secret, and the rights of manufacture for this country have been purchased by the Carnegie Company, of Pittsburg.

The supreme value of the Krupp armor consists in the fact that these plates enable the total weight of armor with which a ship is clothed to be greatly reduced, and the weight so saved may be appropriated to a more powerful armament, or engines and boilers of greater horse-power. Krupp armor shows remarkable toughness combined with all the hardness of the best face-hardened armor; and, unlike armor manufactured by other well-known processes, the Krupp product maintains these qualities in the very thickest armor. The thickness of the hardness of Krupp's process is about 1.7 to 2 inches, while the harveyized process goes in about one inch. The new battleship "Maine" will have Krupp armor; the Russian battleship and cruiser now building at our shipyard will also be protected with it.

Since the Krupp process penetrates into the surface of the plate about two inches, we naturally imagined that it would require a greater length of time to anneal the spots, and after a little experimenting on a sample of this armor we were delightfully surprised to find that the time required to anneal a hole thoroughly was only a trifle longer than that for the harveyized steel plate.

#### DISCUSSION.

THE PRESIDENT.—In annealing a portion of the plate, are there any stresses produced? Is the operation injurious to the plates?

Mr. Dougherty.—I hardly think that the operation produces any stress in the plates, as the action is so local. In regard to whether the plates are injured by the operation, no tests to my knowledge have ever been made to ascertain this.

W. C. L. EGLIN.—I note the remarkable statement that 40,000 amperes are

## PHILADELPHIA: WHAT ARE ITS NEEDS?

A DISCUSSION, HELD OCTOBER 21, 1899.

#### INTRODUCTORY.

H. V. B. OSBOURN.

The subject, as set forth, is a broad one, comprehending many departments of engineering, admitting of discussion along widely divergent lines. It will be my object to indicate the phases that may be discussed, rather than attempt the particularization of any one topic. The following remarks are, therefore, of an introductory nature.

The need of a better water-supply for Philadelphia is obvious, and if anything of value can be said at this time, after the discussions of the last few years, it will be welcome. It seems, however, that "now is the accepted time" to act rather than to talk, for with the present promising conditions, the energetic course being pursued by the Mayor needs but the hearty support of the people in November to secure an abundant supply of first-class water.

Therefore, passing over the greatest necessity of Philadelphia, let us turn our attention to the harbor. Excellent work has already been done in the widening of Delaware Avenue, the extension of the wharves, and deepening of the channel of the river, but the last is confined mainly to the river opposite the central part of the city, leaving an insufficient depth of water over the various shoals in the long reaches down toward the bay. Too much emphasis can not be laid upon the necessity of a deep thoroughfare to the sea. Wharf-owners now have the evidence before them of the benefit of broad, long piers, and should see to it that in this respect Philadelphia does not fall behind its large sister cities. Knowing, as we do, that there has been a satisfactory solution found to this great problem, we can look forward with a greater degree of certainty to the increase of the commercial importance of our city.

Another river is identified with Philadelphia—the Schuylkill—that deserves attention in this connection; not that it is presumable that it will ever be developed to so great an extent, commercially, as the

relieve the congested passenger traffic in the business section of the city, but it seems even this great improvement has not entirely overcome the difficulty, for, when there during last summer, I heard rumors that efforts would likely be made to restore some surface electric lines that the "subway" was supposed to have finally abolished.

In the line of this need our city is more fortunate than either Boston or New York, because congestion can not be so great, owing to the fact that the business section is more scattered and covers a large territory.

The clear appearance of some New York streets on which electric lines are now in operation, is in striking contrast to the unsightly trolley wires and poles in our own city. Again, London has, in a great measure, solved the problem of rapid transit by the underground roads. Probably the ideal combination for Philadelphia will be underground or subway roads for the thickly built-up sections, coming up to elevated roads as the suburbs are approached.

Turning to another interesting topic, and one almost constantly under the public gaze,—that of streets and parks,—we find much matter for discussion. And first let us consider each city as a unit, having a general design, or rather a predominating idea, constantly in application in their upbuilding and extension.

There are, we know, two very distinct types to be followed in the planning of a city—one the gridiron or rectangular fashion, the other a radial method. A notable example of the latter may be seen in the city of Washington. The Capitol forms, as it were, the pivot from which the main streets radiate, and the cross-streets, in a manner, form circles with this pivot as a center. Notice this plan as shown in the accompanying panoramic view of a portion of the national capital. This plan is one calculated to achieve the most pleasing effects in the landscape and general beauty of a city. In designing new streets or remodeling old ones, wherever possible Philadelphia could well follow this example.

Another great need in Philadelphia is numerous wide streets. The younger western cities of this country have evidently noted this fact, for many of them have laid out fine broad boulevards, and striven, particularly in the residential sections, to give ample room for driveway, sidewalks, open ground within which to grow shade trees and, at least, small lawns. It would be scarcely possible to contemplate

enjoyment of those games which make of boys and girls better men and women. This is a plea especially for the inhabitants of the poorer and most thickly populated parts of the city—for these, because of their weaker and less fortunate lives, need the fact as well as the lesson of more wholesome surroundings.

#### DISCUSSION.

Louis Y. Schermerhorn.—In connection with the development of public works, I would refer to our river and harbor improvements. It is not generally appreciated what has been done in this direction in seven years. In 1893 the wharves and piers of Philadelphia were very antiquated, being about 225, 250, and occasionally 300 feet in length, with spaces between the docks seldom exceeding 60 feet, and in many cases even less than 35 feet. Some of these old docks were so narrow that it was impossible to get a dredge between the two adjacent piers, and the operation of dredging docks of that kind consisted in pushing the dredge in, getting a bucket of mud, and backing out again. That has all been changed in the recent arrangement of piers and docks by the Board of Port Wardens, in which the width of docks is not less than 80 feet, with a tendency to increase to 150 feet; with the advance of our pier line from the old line which existed a few years ago to the line as it now exists, permitting the extension of piers with a length of from 500 to 700 feet in place of the former length of 250 feet; the widening of Delaware Avenue from 50 feet to 150 feet, thereby furnishing ample facilities for foot and wagon spaces and the necessary railroad tracks. Piers 35 feet and even less were not an unusual width in days gone by. The standard piers are now 65, 80, and 100 feet in width. Previous to 1893 a large part of our harbor was occupied by Smith, Windmill, and Petty's Islands. We hardly appreciate to-day the former condition of affairs. A man could throw a stone from the end of our present piers to Smith and Windmill Islands, if they existed to-day. At the lower end of Petty's Island there was a width of about one thousand feet between the pier line and the island; now the width is 2100 feet. This work has been accomplished in the last seven years. Placed in cubic yards and dollars, it means the removal of about 25,000,000 cubic yards of material at a cost of about three and one-half millions of dollars. This represents only a part of what has been accomplished. It is safe to say that since the inception of this harbor improvement in 1890, the money expended upon the Philadelphia harbor by the Government, the City, the State, and by private and corporate enterprise, represents an aggregate of eight millions of dollars. is a very large expenditure—more than has ever been spent in any city in the United States for that length of time in similar improvements.

We have wonderful possibilities as a commercial port: five and one-half miles of the harbor lying along the Philadelphia front have to-day a depth in the upper mile and one-half of from 26 to 28 feet, and the lower three and one-half miles a depth of 30 feet. From the lower end of Petty's Island to Kaighn's Point there

is a channel off the ends of our longest piers having a depth of at least 30 feet, and a width of a thousand feet. There is now an opportunity, by the removal of the islands and adjacent shoals, for an adequate extension of city wharves. The city has widened Delaware Avenue to 150 feet for a mile of its length,—from South Street on the south to Vine Street on the north,—and is now contemplating a further extension of one-half of a mile or more further north, continuing the width of 150 feet, so that we have a splendid avenue along our city front with every facility for access to its wharves. Less than one-half of this expenditure—probably about 40 per cent.—has been made by the Government: the remaining 60 per cent. has been made by the city and private and corporate interests.

Those who have followed this improvement from its inception in 1890 down to its commencement about 1892, and to its completion in 1897, hardly thought in the beginning that it was possible to have accomplished what already has been done. Now we need the commerce; we have!25 or 30 modern wharves fully meeting the requirements of modern steamships. There is no doubt that the commerce will come naturally in the course of events. The Delaware River is the natural outlet of the State of Pennsylvania to the sea and much of the great west back of it. Ignoring all west of it, simply considering the State of Pennsylvania, the State of Delaware, and a part of New Jersey, these three States, or parts of States, cover an area of over fifty-four thousand square miles, with a population of nearly seven million people, or one-tenth of the entire population of the United States.

Now, what has the State of Pennsylvania to offer as commerce? Over 50 per cent. of the iron ores of the United States is developed in the State of Pennsylvania; probably 60 per cent. of the manufactured iron of the United States comes from the State of Pennsylvania; over 60 per cent. of the petroleum products are from the same State, and 100 per cent. of the anthracite of the United States come from the States of Pennsylvania. The manufactured products of the city of Philadelphia alone are to-day over \$600,000,000 per annum. I don't mean that all of that amount is necessarily for consumption away from home, but a very large part of it is, and we are living in the days when the outside world is demanding much that we manufacture. When you take into consideration the locomotives by the hundreds that the Baldwins are shipping out of this country to the world outside, the demand being made on our great bridge builders for bridges that have been recently erected,—the Pencoyd, for instance,—we have a few instances of the trade possibilities of this country, which lie right here We have a fine harbor; there is no harbor probably outside of the city of New York which offers the facilities that Philadelphia's harbor does today. We are handicapped by lack of a proper outlet to the sea. The report of the Board of Engineers, just been given to the public, pronounces upon the feasibility of a thirty-foot channel between Philadelphia and the sea, at an estimated cost of less than \$6,000,000; requiring the estimated removal of 33,000,-000 yards of earthy material and 25,000 yards of rock. There is no doubt that this improvement will be entered upon in the very near future; and there is now \$50,000.00 available for its commencement. Congress will be urged to supplement the appropriations already made for the thirty-foot channel by additional appropriations, and it is hoped that the appropriations will reach about one million dollars a year, requiring about five or six years to secure a thirty-foot channel to the sea. When that time comes, we will be in a condition which will place us on a parity with our sister ports of Boston, New York, Baltimore, Norfolk, and Newport News. We certainly have been very seriously handicapped in the past. Boston harbor to-day has a channel entrance carrying about 26 feet at low water with a tide of 10 feet, so that at half tide there would be 31 feet of water. New York has 30 feet with an approved project for a channel 40 feet deep. Baltimore has a channel 30 feet deep, and is now moving for a thirty-five-foot channel 600 feet Newport News has a channel of unlimited depth and capacity, directly fronting upon Hampton Roads. Norfolk harbor, which is becoming an important port of entry and shipment, has a channel from the Roads to Norfolk Navy Yard, 30 feet deep; so that we stand to-day with the harbors of Boston, New York, Baltimore, Newport News, and Norfolk with practically channels of 30 The harbor of Philadelphia, although it has a channel depth of 30 feet, has 22 feet of low-water depth in its approach from the sea; so that we are not upon a fair footing with our sister or rival ports.

The expenditure of three and one-half millions of dollars which the Government has made upon the improvement of Philadelphia harbor, and about six millions of dollars anticipated for the improvement of the river channel between Philadelphia and the sea, making approximately about ten millions of dollars, is less than one-ninth of the value of exports and imports each year leaving and entering the port of Philadelphia. I am satisfied to make this general statement: that our possibility of competing for the markets of the world depends upon our being able to lower the cost of transportation, and that can only be obtained by deeper channels, which will admit vessels of 30 feet and over. Vessels are entering New York harbor to-day, of course on half tide and more, drawing 33 feet. If they had a forty-foot channel, I have no doubt that in a year or two vessels would be entering New York harbor with a draft of 35 feet. The vessels of greatest draft are the cheapest carriers. That means that one must have channels of sufficient When we have channels of 30 dimensions for vessels of deep draft to move in. feet and over, and can prove to the world that freights can be sent here without any chance of injury to the vessels, with its consequent expenses of dry-docking and demurrage charges, I have no doubt that we will see the docks and wharves of Philadelphia replete with vessels carrying a commerce from this port which is commensurate with the enormous manufacturing possibilities which are behind That I feel sure is one of the needs of Philadelphia, but a need which is thoroughly appreciated both here and in Washington, and I believe that it will be met in the very near future.

James Christie.—In an industrial sense, the time is about ripe for the establishment of numerous ship-building plants in Philadelphia, or on the river line adjacent to, or tributary to, Philadelphia. Considering that the export trade of the country has now a money value of \$100,000,000 per month, and that the

material that enters into the construction of ships has been extensively exported, it is not creditable to the enterprise of the nation that we should be so low on the list in this industry.

Among other municipal improvements we need several bridges across the Wissahickon Ravine, and some more across the Schuylkill, to facilitate traffic. It is to be hoped that these structures, when constructed, will combine substantial solidity with handsome artistic effects—qualities, either or both of which are missing in many of our bridges. There is a constant demand for more schools, and also for more open areas throughout the city. Why not combine the two? Devote suitable ground areas, say an ordinary city square, to each school, so that the pupils can have a playground attached to each building, and are not thrust from the school doors onto the public highways. It is certain that the community is always willing to spend money lavishly when it is expended judiciously, and in this connection it may be observed that the most urgent need of Philadelphia is the cultivation of an exalted sense of civic responsibility, so that this great city may be spared the repetition of the official turpitude it has experienced during the past few years.

Mr. Schermerhorn's remarks on the improvement of the Delaware River remind us of a possible future demand for an improved channel—for an industry that is now of little importance on the river banks. It is quite probable that there may be established on the banks of the Delaware extensive plants for the manufacture of iron and steel. There is a growing scarcity of high-grade iron ores in the seaboard States. At the same time, the bituminous coals of Pennsylvania and Virginia are delivered here cheaper than formerly. Now, remembering that nearly two tons of ore are handled for each ton of coal in blast furnace operations, it is evident that the coal will be carried to the ore instead of the reverse, unless other conditions interfere; therefore, if foreign ores can be economically delivered at Delaware or Chesapeake ports, it is probable that pigiron can be made at these points profitably. If this should prove to be the case, large steel manufacturing plants can also be established. Another incentive to this arises from the modern system of coke making, whereby rich combustible gas and other products that were wasted in the old beehive ovens are utilized. gas can best be utilized in the vicinity of large cities, either directly or by the transmission of its heat-energy electrically. This means that coke can be profitably made on the shores of the Delaware; and the interesting work of the New England Company, near Boston, on the lines indicated can be observed, with a view to its application here. The persistent work of Edison in his endeavor to separate and concentrate the lean New Jersey ores has a direct and evident bearing on The child may now be living who will see the Delaware, from Philadelphia to the sea, lined with gigantic iron and steel works, and with ship-yards and similar plants, into which iron enters as a prime material, and who will see the noble river floating its argosies, laden with products for distribution through-These may be classed among the wants of Philadelphia. out the world.

HENRY G. Morris.—The subject of parks has been touched upon by Mr. Osbourn, and in that connection I want to make a few remarks in relation to

what is known as Dickinson Square—between Morris and Tasker Streets, and Third and Fourth Streets. A few years ago it was purchased by the city as a public square, but it was decided to make it into a children's playground. It was placed in the hands of persons having that end in view, and was laid out, with buildings on it for the accommodation of children, where they could have kindergartens, and an attempt to make a sand garden, a bicycle path being made around the outside. The rest of the square was covered the broken stone. The children were turned loose on it—poor little things!—with their bare feet, and, naturally, their first effort was to throw those stones off the square, and some of them found their way into the windows of the houses on the other side Thereupon a howl went up from the occupants of the houses, and it was decided that they could not have the children playing there any more, and that it could not be used as a playground, but must be converted into a public square, such as we have up-town; and so the matter stands. This seems an unfair conclusion, as in that part of the city the crop of children is about the most certain thing we have. Where shall they go to? One of these days there will be a League Island Park, possibly; but it certainly seems a pity that in making improvements some provision should not be made for these open spaces where proper playgrounds can be had. I made a rough calculation one day in looking out of my window in the southwest corner of the Drexel Building, on the ninth floor. Looking over Independence Square and Washington Square, you would imagine you were in a woods there,—in the summer time, at least,—and I made a short calculation of how much space it would require to accommodate the people of Philadelphia, supposing each inhabitant had as much space (cubic feet) as we have in our offices—possibly about eighteen feet square each room, and six people in it (six rooms). That, I think, is a greater average than persons have ordinarily. Now, supposing the city to be built up to an average density equal to the Drexel Building, - open spaces, court-yards, etc., surrounding it,—and leaving every alternate square open, the population of Philadelphia could be accommodated on about four miles square, and could be better accommodated than they are in small alleys where each man has to look after his front door, pavement, etc. Of course, this is particularly ideal. We could not tear down Philadelphia and build it over, but it seems to me that in looking forward to the extension of the city something of that sort could be done. It is not necessary to build up the city in square blocks of houses—six- or twelve-room Now, as to League Island Park. I am sorry that we have not the plans of it. Several years ago, when a movement was first made to establish it, an ordinance was introduced appropriating \$60,000 to purchase 300 acres Of course that was only an entering wedge. However, it passed, and the city officers made application to the property owners for purchase of the ground, asking what they would take for it. Nobody responded very earnestly to that, and the next thing was an offer from the City Solicitor's office of \$200 an acre. That would just about cover the appropriation. As a good many people had held that property for a hundred years, more or less, they did not seem to see the propriety of selling it for \$200 an acre, and the next move was to

appoint a jury and to have it condemned, which resulted in the city being mandamused for about \$350,000, without any appropriation whatever. was offered for the best plan for the improvement of that park. The munificent sum of \$750 was offered for the best plan of improving three hundred acres of ground! I am glad to say that New York carried off the prize, because I did not believe that any self-respecting engineer would undertake to do it in Phila-There are some interesting things about that part of the country, delphia. which perhaps are not generally known. Most of the property, as you know, lies below tide, and requires the care and protection of banks all the way from Greenwich Point to Girard Point, and these banks are in charge of several companies, which were chartered in the time of the Georges. They have rights superior to the city. They have the right to tax indefinitely for protection, for keeping up the banks: as high as \$7.00 an acre has been levied in one year. is a pretty serious item, but nevertheless the water must be kept out. is now being made to get the city to assume these responsibilities, for it is manifestly wrong in this age to have such companies not under the control of the city. I have understood that it was the intention to raise the grade of Broad Street so as to permit the water and sewers to discharge above tide. If that were done, I think it would raise Broad Street probably eleven feet. That would mean a very considerable fill on 300 acres, and Mr. Schermerhorn will be able to tell you just what it would cost to fill it up. I have not been able to find out what provision has been made for the grades of the railroads that were going to run there. years ago the Belt Line Railroad obtained permission to use Government Avenue, which is opposite League Island. The Pennsylvania Railroad demanded the right to put in a railroad 150 feet north of Government Avenue. nance was passed very hurriedly, with unseemly haste, apparently for the purpose of heading off the Belt Line road, on the plea that the navy yard demanded immediate connection with railroads. To-day the navy yard has no railroad connection whatever. Recently that matter has come up again, and the Pennsylvania Railroad Company is pressing for its right of way; but as far as I can understand, no adequate provision has been made for carrying it properly through the park. It would be quite a serious interference with the park to have one or two lines of railroad running through it, and if it is necessary to change the grades there by raising Broad Street and the intersecting streets, it will make complications that should certainly be provided for in advance. I am not opposed to League Island Park at all; only to the way of doing it. I think we ought to have a great many more parks than we have. It seems to me a much better scheme could have been laid out if they proposed to open alternate squares, making a winding park, which would have the effect of open country, and leaving the alternate squares to be improved naturally by building,—there is no reason why there should not be handsome houses down there, since it is raised out of the water,—and that would have avoided the expenditure of a very large sum of money by the city and permitted the property owners to reap some advantage from the squares.

THE PRESIDENT.—To continue the discussion, I will shape my remarks in the

form of a question, which I will preface with the assertion that commerce tends toward cities offering the greatest number of points of interest and beauty, other things, such as natural advantages and commercial facilities, being equal. The city possessing the most beautiful streets, buildings, monuments, museums, theaters, and places of amusement will be chosen as a mart by the man of commerce in preference to one not so enriched.

Imagine, then, Philadelphia in its present form and condition transposed to the shores of the Chesapeake Bay,—say, Newport News, which has the advantage of one of the best harbors in the world, with magnificent rivers radiating toward the large cities of Baltimore, Washington, and Richmond. For comparison and gage, take New York city in its present location and just as it exists to-day. My question is, Would Philadelphia recover its former prominence as a commercial center, or at least share equally with New York?

W. R. Webster.—I agree with Mr. Christie as regards the manufacture of iron along the banks of the Delaware River from foreign ores, but do not consider free trade at all necessary to bring this about. Our export trade is increasing all the time, and for these orders we have all the advantages on raw materials that free trade would give us, as the tariff reads:

"Articles manufactured in this country and exported, made wholly or in part of imported material, are entitled on exportation to a drawback equal to the amount of duty paid on the imported material used in the manufacture, less one per cent."

This gives our manufacturers cheap raw materials and our men the work of converting the same into finished bridges, 'rails, etc. The only drawback is the amount of red tape involved; if this can be simplified, most of our manufacturers will use more foreign materials in export orders.

THE PRESIDENT.—I wonder how school facilities of Philadelphia, in the form of edifices, compare with New York city. We have one building on Broad Street, but it is not completed.

Mr. Osbourn.—About three to one in favor of New York.

THE PRESIDENT.—I saw some plans several years ago for a school building that certainly excelled anything we have in Philadelphia in regard to the design as to sanitary purposes, light, playground, etc. Mr. Trautwine can tell us how our prospective water-system compares with the present New York system as to perfection of operation, water-supply, and monumental character of the structure, speaking of the new.

J. C. TRAUTWINE, JR.—The two systems are so different in principle that it is very difficult to compare them. New York takes a small stream in its vicinity and impounds it, being forced thereto by the absence of large supplies of fresh water in its immediate vicinity. The Croton water flows to New York by gravity; whereas, if the recommendations of the experts are carried out, the water for Philadelphia will continue to be taken from the two rivers which now supply us, and will be improved by filtration.

Mr. Osbourn.—I wish to call attention to one more of Philadelphia's needs: that is, underground construction in streets. There are streets in European

cities where all mains—gas, water, and electric—are placed in open and accessible tunnels. That is one of the improvements to the acquisition of which Philadelphia should look forward, and I hope we may soon see it, and thus eliminate many serious dangers.

Mr. Morris.—It seems astonishing, when you look at the work that is being done in putting down conduits through our streets, that we did not realize that everything might have been put underground in open tunnels, in accessible tunnels, for less cost than has been expended in putting them down piecemeal and taking them up again, and the annoyance of taking up the pavements; and how much better it would be if we could get at all the stop-valves in one chamber. One crossing downtown has thirteen manholes in one intersection. It seems absurd.

THE PRESIDENT.—Mr. Trautwine, will you tell us something about these matters?

Mr. Trautwine.—I can only concur in what Mr. Osbourn remarked in introducing the subject-matters: viz., that the water question, in which I am more particularly interested, is now definitely settled, the experts appointed by the Mayor having filed a report in which they indorse the recommendations that the Water Department and Bureau have for many years been making. I therefore think it quite in order that most of the evening has been devoted to other matters.

THE PRESIDENT.—Undoubtedly, Philadelphia could be improved by a revision of its esthetics in the line of engineering and architecture. Much could be done in this direction toward beautifying the city. Compared with other large cities, we must admit its lack of embellishment.

Commercial centers, to maintain their supremacy, must exert themselves to attract, with all that is interesting and beautiful. We appear too utilitarian, and in many of our public and private works fail to grasp the trend toward the artistic—that which is pleasant to the eye.

EDGAR MARBURG.—It is a remarkable fact, and one not easily explained, that in contemplating expenditures for municipal purposes the average honest, well-intentioned citizen applies a very different standard from that to which he is accustomed in the regulation of his own private affairs. In his own family, after the necessities of life have been provided, a prudent man gives thought, first, to matters of health and hygiene; second, to the education of his children; and third, to other matters, whether of convenience, beauty, or what not. There is no reason why this rational order of procedure should be departed from in approaching public expenditures. It seems, therefore, quite incomprehensible that there should be so many men, of undoubted honesty and intelligence, who stand willing to commit themselves in an off-hand, thoughtless fashion to such schemes as, for example, the late Boulevard project, so long as there are pressing needs touching public health and public education, for which no adequate provisions have been made.

#### COMMUNICATED DISCUSSION.

WM. COPELAND FURBER.—Philadelphia's needs, what are they? This subject is such a comprehensive one that I am not able to discuss it without more preparation than I have thus far given it. I hope, however, in the near future to lay a paper before the Club for further consideration. I think the discussion should touch on those causes that have contributed to the loss of the commercial prestige the city once enjoyed, and that a discriminating line should be drawn between natural disadvantages, if any, which can not be changed, and artificial handicaps, which can be removed by earnest effort and a "new" public spirit.

The "New Philadelphia" we used to hear so much about, and which promised so much, seems to have received its "knock-out blow" in the remarkable sale of the Philadelphia gas-works—practically without protest. The causes that led to this, and to an almost successful similar effort to dispose of the water-supply, furnish material for careful reflection, and we may well stop and ask, "Where are we at?" A little thought will show us that the once mighty public spirit of Philadelphia is being slowly bound by threads, like Gulliver of old, until it is a question now as to which is the stronger—the people or the threads.

### ABSTRACT OF MINUTES OF THE CLUB.

Business Meeting, January 6, 1900.—The President in the chair. Sixty-nine members and eight visitors present.

The Secretary announced the death of Edward H. Williams, Active Member, which occurred on December 21, 1899.

William B. Wilson (non-member) read biographical sketches of the professional careers of William Hasell Wilson and Herman Haupt.

The tellers reported the election of Messrs. Thos. J. Buckley, John De Gray, Geo. B. Ferrier, Jr., and Richard W. Tull to junior membership, and J. S. Alexander to associate membership.

ANNUAL MEETING, January 20, 1900.—The President in the chair. Ninety-two members and four visitors present.

The annual reports of the Board of Directors and Treasurer were presented and read by the Secretary.

The retiring President, Mr. Francis Schumann, read the annual address, the subject being "Esthetics and the American Engineer."

The tellers reported the following officers elected for 1900:

President.—Edgar Marburg.

Vice-President.—L. Y. Schermerhorn.

Secretary.—L. F. Rondinella.

Treasurer.—Geo. T. Gwilliam.

Directors.—James Christie, Charles Piez, Edwin F. Smith.

The tellers also reported the election of Coleman Sellers to honorary membership.

## ABSTRACT OF MINUTES OF THE BOARD OF DIRECTORS.

SPECIAL MEETING, January 6, 1900.—Present: The President, the second Vice-President, Directors Humphrey, Ott, Smith, and Levis, the Secretary, and the Treasurer.

The business of the meeting related entirely to the preparation of the annual report for presentation to the Club.

REGULAR MEETING, January 20, 1900.—Present: The President, the Vice-Presidents, Directors Humphrey, Ott, Smith, Evans, Levis, and Souder, and the Secretary.

The resignation of Alfred Walter, to take effect as of December 31, 1900, and the resignations of Francis J. Boas, Charles P. Thompson, and J. H. Vail, to take effect as of December 31, 1899, were accepted.

The	Treasurer reported	Balance on hand November	<b>3</b> 0t	h,	•	. \$1145.09
		Receipts in December,		•	•	. 963.33
		Total,				\$2108.42
		Disbursements in December	, .	•	•	. 912.01
		Balance, December 31st,		•	•	\$1196.41

ORGANIZATION MEETING, January 27, 1900.—Present: The President, the second Vice-President, Directors Levis, Souder, Christie, Piez, and Smith, the Secretary, and the Treasurer.

The standing committees for the year were appointed as follows:

Finance.—Edwin F. Smith, Henry Leffmann, Minford Levis.

Membership.—Charles Piez, James Christie, Harrison Souder.

Publication.—Henry Leffmann, James Christie, Edwin F. Smith.

Library.—Harrison Souder, L. Y. Schermerhorn, Wm. Penn Evans.

Information.—L. Y. Schermerhorn, Charles Piez, Minford Levis.

House.—Minford Levis, Edwin F. Smith, Wm. Penn Evans.

### ADDITIONS TO THE LIBRARY.

FROM ILLINOIS SOCIETY OF ENGINEERS AND SURVEYORS. Reports for 1897, 1898, and 1899.

FROM THE INSTITUTION OF CIVIL ENGINEERS.
Abstracts, Vol. CXXXVIII, Part IV. Session 1898–1899.

FROM AMERICAN SOCIETY OF MECHANICAL ENGINEERS. Transactions, Vol. XX, 1899.

FROM PATTERSON & WHITE, PUBLISHERS, PHILADELPHIA. Club Directory for 1899-1900.

FROM AMERICAN IRON AND STREL ASSOCIATION.
History of the Manufacture of Armor Plate for the United States Navy.

FROM L. C. FERRELL, SUPERINTENDENT OF DOCUMENTS, WASHINGTON, D. C. Report of American Historical Association, 1898.

" Commissioner of Navigation, 1899.

Compilations of Treaties in Force, 1899.

Consular Reports, No. 226, July, 1899.

- " No. 227, August, 1899.
- " No. 228, September, 1899.

Fish Commission Bulletin, Vol. XVIII.

Nineteenth Annual Report Geological Survey, Vol. II.

Memoirs National Academy of Sciences, Vol. VIII.

Monthly Summary Commerce and Finance, August, 1899.

" " September, 1899.
" " October, 1999.
" " November, 1899.

Special Consular Reports, Vol. XVII.

Supplement to Consular Reports, No. 228, September, 1899.

Water-supply and Irrigation Papers, No. 29.

" No. 30.

Congressional Directory, First Session, 56th Congress.

FROM C. H. UMSTEAD.

Annual Report of Chief of Bureau of Yards and Docks, 1899.

FROM BOSTON TRANSIT COMMISSION.

Fifth Annual Report, 1899.

FROM SOCIETY OF ENGINEERS, LONDON.

Transactions, 1898.

### THE ENGINEERS' CLUB OF PHILADELPHIA,

House, No. 1122 Girard Street, PHILADELPHIA. PA.

## ANNUAL REPORT OF THE BOARD OF DIRECTORS FOR THE FISCAL YEAR 1800

JANUARY 6, 1900.

TO THE ENGINEERS' CLUB OF PHILADELPHIA:

In compliance with the requirements of the By-Laws, the Board of Directors offers the following report for the year ending December 31, 1899.

Eighteen regular meetings and one special meeting of the Club were held, at which the maximum attendance was 116, and the average about 73. Nine stated and four special meetings of the Board of Directors were held, at all of which a quorum was present.

During the year 23 active, 4 associate, and 10 junior members were elected; 12 active and 2 associate members resigned; and 7 active members and 1 associate member were dropped from the rolls.

The record of death is as follows:

James McCann, Active Member, died January 8, 1899.

W. D. Heston, Active Member, died July 28, 1899.

Richard B. Osborne, Active Member, died November 28, 1899.

Edward H. Williams, Active Member, died December 21, 1899.

The membership of the Club on December 31, 1899, as compared with the previous year, was as follows:

		1898.			1899.	
Class.	Resident.	Non-Resident.	Total.	Resident.	Non-Resident.	Total.
Honorary		1	1		1	1
Active	281	110	391	283	115	398
Associate	20	2	<b>22</b>	19	1	20
Junior	9	2	11	12	5	17
	310	115	425	315	121	436
	910	113	420	919	141	300

During the month of March the House Committee solicited subscriptions for fitting up the third-story front room as a billiard-room. This was accomplished with satisfactory results without expense to the Club.

The books that were formerly shelved in this room were listed and placed in better order in the third-floor back room, and the Library Committee has obtained subscriptions and ordered a large number of books for a reference library.

The greater portion of the house was repapered and painted, the front wood-work repainted, and the plumbing renovated by the Girard Estate without cost to the Club.

A filter was placed in the kitchen for furnishing water for drinking purposes, and an exhaust fan in the meeting room to aid ventilation.

The improvements have resulted in a large increase of the use of the Club-house.

During the year six numbers of the Proceedings have been issued at convenient intervals, constituting volume XVI. The net cost of publishing this volume, including the cost of reporting the discussions, was about \$800. A statement of the receipts and expenditures chargeable to the publication account will be found in the Treasurer's report.

The following papers have been presented:

JANUARY 7TH.—The Reconstruction of the Reservoir for the York, Pa., Water Company; Notes upon a New Water-power Improvement on the Niagara River. John Birkinbine.

JANUARY 21st.—Address of Retiring President. Some Phases in the Development of the Science of Mechanics; Keely Motor Wires. Carl Hering.

FEBRUARY 4TH.—The Problem of Water-purification for the City of Philadelphia. P. J. A. Maignen.

FEBRUARY 18TH.—A Sand-filter Plant. J. W. Ledoux. Note on Strength of Tubes (read by title). L. Y. Schermerhorn.

MARCH 4TH.—Engineering of Transmission of Intelligence. Theodore Spencer.
MARCH 18TH.—The Fruits of Sanitary Science. J. B Johnson.

MARCH 25TH.—Water-supply of the City of Philadelphia. John C. Trautwine, Jr., and Edgar Marburg.

APRIL 181.—Testing Laboratory of the City of Philadelphia. Richard L. Humphrey. Recent Developments in Electrical Engineering. Carl Hering.

APRIL 15TH. - Coastal Topography. Oscar C. S. Carter.

MAY 6TH. - Modern Mine-Haulage Practice. Harry K. Myers.

MAY 20TH.—The Utilization of Wastes. John Birkinbine. The Philadelphia Exposition. John Birkinbine.

JUNE 3D.—The Niagara Gorge Railroad. George A. Ricker.

SEPTEMBER 16TH.—A Portable Electrical Testing Set. W. C. L. Eglin.

OCTOBER 21st.—Philadelphia—What Are Its Needs? Harry V. B. Osbourn.

NOVEMBER 4TH.—Long-span Bridges. William H. Burr.

NOVEMBER 18TH.—The Atbara River Bridge. Richard Khuen, Jr.

DECEMBER 2D.—The Motorman as an Element of Street Railway Economy. Charles Hewitt.

DECEMBER 16TH.—The Electrical Process of Annealing Armor Plates in the Construction of War-ships. Charles J. Dougherty.

Estimate of expenses for 1900 compared with corresponding items for 1899:

	EXPENDITURES FOR 1899.	ESTIMATES FOR 1900.
Salaries	\$1,546 39	\$1,650 00
Proceedings	1,352 85	1,000 00
House		1,700 00
House improvements	•	200 00
Luncheons		<b>750 00</b>
Office	567 70	500 00
Library		200 00
Information		75 00
	\$6,012 96	\$6,075 00

Respectfully submitted,

FRANCIS SCHUMANN, President. L. F. RONDINELLA, Secretary.

#### REPORT OF THE TREASURER FOR THE FISCAL YEAR 1899.

Receipta.	Expenditures.
Receipts.  Initiation Fees (37)\$185 00 1898 Dues150 00 1899 Dues4,537 50 1900 Dues580 00 Proceedings (Advertise-	Expenditures.  Salaries: Secretary
ments) \$667 84	House:
Proceedings (Sales) 87 96 — 755 80	Rent\$1,100 00 Coal 85 25
Interest on Deposits 32 49	Gas 72 60
Interest on Investment	Ice 29 46
Keys (sold) 3 85	Repairs 92 62
Slides (sold) 5 10	Supplies 221 85
<b>Typewriter</b> (sold)	Telephone 67 78
Telephone	\$1,669 56
Billiards 78 43	Office Expenses
<del></del>	Proceedings
Total Receipts\$6,373 27	Information Committee 99 68
Cash Balance, Dec. 31, 1898 875 01	Library 74 79
•	Luncheons 702 00
	Billiards
	Dues Refunded (1898) 10 00
	Total Disbursements\$6,051 87
	CASH BALANCE DEC. 31, 1899, 1,196 41
\$7,248 28	\$7,248 28

Respectfully submitted, GEO. T. GWILLIAM, Treasurer.

We have examined the books and accounts of the Treasurer, compared them with the original vouchers, checks, and bank-books, and find them to correspond with the Treasurer's statement as submitted above.

[Signed]
JAMES CHRISTIE,
W. P. DALLETT,
H. W. SPANGLER,
Auditors.

## THE ENGINEERS' CLUB OF PHILADELPHIA

1122 Girard Street

#### OFFICERS FOR 1900

## President EDGAR MARBURG

Vice-Presidents

Term Expires January, 1901
HENRY LEFFMANN

Term Expires January, 1902
LOUIS Y. SCHERMERHORN

Directors.

MINFORD LEVIS

Term Expires January, 1901

HARRISON SOUDER

W. PENN EVANS

JAMES CHRISTIE

Term Expires January, 1902

CHARLES PIEZ

EDWIN F. SMITH

Secretary

L. F. RONDINELLA

Treasurer

GEORGE T. GWILLIAM

#### STANDING COMMITTEES OF BOARD OF DIRECTORS

Finance—Edwin F. Smith, Henry Leffmann, Minford Levis.

Membership—Charles Piez, James Christie, Harrison Souder.

Publication—Henry Leffmann, James Christie, Edwin F. Smith.

Library—Harrison Souder, Louis Y. Schermerhorn, W. Penn Evans.

Information—Louis Y. Schermerhorn, Charles Piez, Minford Levis.

House—Minford Levis, W. Penn Evans, Edwin F. Smith.

#### SPECIAL COMMITTEES OF THE CLUB

Relations of the Engineering Profession to the Public-John Birkinbine, Chairman. New Club House-W. Copeland Furber, Chairman.

#### **MEETINGS**

Annual Meeting-3d Saturday of January, at 8 P.M.

Stated Meetings—1st and 3d Saturdays of each month, at 8 P.M., except between the fourteenth days of June and September.

Business Meetings—When required by the Constitution or By-Laws, when ordered by the President or the Board of Directors, or on the written request of five Active Members of the Club.

The Board of Directors meets at 4 P.M. on the 3d Saturday of each month, except July and August.

## **PROCEEDINGS**

OF

## THE ENGINEERS' CLUB

OF PHILADELPHIA.

ORGANIZED DECEMBER 17, 1877.

INCORPORATED JUNE 9, 1892.

Note.—The Club, as a body, is not responsible for the statements and opinions advanced in its publications.

Vol. XVII.

MAY, 1900.

No. 2.

# THE UTILIZATION OF BACTERIA AND BACTERIOLOGIC METHODS IN SANITARY ENGINEERING.

A. C. ABBOTT.

Read February 3, 1900.

In response to a courteous invitation I have the honor to address The Engineers' Club this evening on a subject that is attracting a great deal of attention, not only on the part of engineers, but the general public as well: namely, the utilization of bacteria and bacteriologic methods in sanitary engineering.

Because of the conspicuous place that has been given to this subject in sanitary literature during the past few years an impression is more or less prevalent that there is something new in the utilization of bacteria for the destruction of organic waste. I propose this evening to convince you that there is nothing new in the process. It is, as we say, "as old as the hills," and has been in operation over the surface of the earth for all time; but the applications that are being made of it and the devices of engineers to favor this process to its greatest extent are in some cases new, and it is to certain of these devices that I call your attention.

As you are aware, all dead things, be they animal or plant, naturally disappear after a time, and this disappearance is due to the

1

activities of the microscopic plants omnipresent in the surface of the soil, the water, etc., that we call bacteria. This removal of dead organic matters by bacteria consists in the conversion of their highly complicated chemical structures into simpler forms that serve as food for higher plants. We may, therefore, regard the superficial soil as nature's great laboratory, in which this important operation is at all times in active progress.

When we consider the functions of the sanitary engineer, there can be little question that those of highest moment to the welfare of the community are concerned with the questions of water-supply and the disposal of waste.

In connection with water-supplies and the methods of purifying water we find that those methods adopted by the sanitary engineers which have given the greatest satisfaction are closely imitative of processes that are naturally in operation. We find that for about half a century the best of these methods has been in successful employment. It is, however, only comparatively recently-within, say, the past fifteen or eighteen years—that the principles involved have been understood. It is superfluous for me at this time to enter into the structural details of the devices employed for what we understand as the purification of water by natural filtration. This is doubtless familiar to you all. Briefly stated, they consist fundamentally of a bed of sand that will permit of the uniform passage of water through it at a rate that experience has shown to be most favorable to purification. There is no doubt that the observation that gave rise to this method was one that we may make at any time by observing the alteration that ordinary surface and superficial soil waters undergo in passing naturally through the soil to appear as springs or to feed wells. If analyses be made of these surface and soil waters, and similar analyses be made simultaneously of the waters of neighboring springs and wells, we shall, as a rule, find that the water in percolating through the ground has undergone important changes, which changes are generally comprehended in the term purification. Before our knowledge of bacteriology had reached its present development these alterations were regarded as entirely chemical: that is, the destruction of organic matters in the waters was looked upon as simply a change due to the process of oxidation. The part played by living organisms in bringing it about was not recognized as of importance. With the progress of knowledge and the elaboration of trustworthy bacteriologic methods it very soon became apparent that this process of purification was complicated, most interesting, could be relied upon, could be artificially duplicated, and was one that was fundamentally always due to living microorganisms. It is instructive to follow closely the process from its beginning to its end. This may be done by observing the "ripening" of a new filter. For instance, if polluted water be passed upon a freshly prepared sand-bed, there is not at once any purification observable in the filtrate, and, indeed, several days may elapse before such purification begins. If the filtration be continued, we will notice—after two, three, or four days, as the case may be that the filtrate becomes not only perfectly clear and transparent, but that it is beginning to differ both chemically and biologically from the raw water. If the process be continued undisturbed, we will also note that this change increases until a point that may be called the maximum of efficiency is reached. This maximum will, in turn, continue for a variable time, according to circumstances, when it will be noted that the amount of water coming through the filter is diminishing, and ultimately so little will pass through it that the filter can not any longer be regarded as a practical process for supplying the necessary amount of pure water. When this point is reached, if all water be drawn from that filter, and the sand of which it is constructed be examined, we shall find a condition that at once shows us through what agencies the purification has taken place. We will find that on the surface of the sand is a more or less dense deposit of living vegetable matter, consisting principally of masses of bacteria growing together as a jelly-like or felt-like layer, in which layer is entangled practically all of the suspended matters that the raw water contained. We will find that this layer of living microorganisms is not only upon the surface of the filter, but that it extends for some distance down into the sand. If we will now recall the history of this filter, we will see that when newly constructed, no purification occurred; that as water continued to percolate through it, purification was at first made manifest to a slight extent, and then rapidly increased. This can lead to but one conclusion: namely, that the sand itself is not after all the real filter, but is only the framework on which the real filter forms, and that the real filter comprises the impurities that were contained in the water to be purified, the most important of which are the living

bacteria. When we examine these bacteria by proper methods, we will find that they are made up of a great variety of species, some of which have the property of decomposing ordinary organic matters into their end-products, which are principally ammonia and carbonic acid, while other species have the property of oxidizing this ammonia into nitrous and nitric acids. It is owing to the activities of these two groups of bacteria that we find those waters purified in this artificial device, as well as those waters purified by percolating naturally through the soil, to be always poor in organic matters and rich in the nitrates, which are the results of decomposition and nitrification brought about by the living microorganisms. In other words, in our artificially constructed filter-bed we have simply arranged conditions that simulate those observed naturally in the soil, but which are arranged with the definite object of permitting the process to be more actively carried on. In brief, the results obtained by the devices of the sanitary engineer for this process of purification are, when at all successful, usually more successful from the economic standpoint than those observed naturally in the soil.

If the device for favoring the purification of water by this natural process be correctly adjusted to the conditions, experience has shown that it can be relied upon to furnish a filtrate from which 60 to 70 per cent. of all the organic matters have been removed by the biologic phenomena mentioned, and from which all suspended inert matters as well as over ninety-nine per cent. of living bacteria are removed by the simple process of straining. You see from this statement that even when operating under the most favorable conditions consistent with economy, and satisfactory from the sanitary standpoint, there is always in the filtrate not only a portion of dissolved organic matter, but also a few bacteria. In consequence of this, the question has frequently arisen as to whether water purified in this way would support the growth of disease-producing bacteria should they pass through the filter into the filtered water. In reply to this question it is proper to say that even in grossly polluted waters the number of specific disease-producing bacteria is very small as compared with the ordinary saprophytic forms; and since the disease-producing bacteria do not differ from the common bacteria, so far as filtration is concerned, it is fair to assume that ordinarily when a filter is in successful operation it is rare indeed to find disease-producing bacteria in the filtrate. In fact, all statistics relating to the health of communities receiving drinking-water purified in this way lead to the belief that the filtered water is dangerous only when there has been some disturbance of the normal operations of the filter. It is also probable that a large part of the small number of bacteria in the filtered water get there after the water has traversed the filter. Should disease-producing bacteria gain access to the filtered water, they are forced to compete for their nutrition, which we now know is limited, with a group of much hardier microorganisms that are normally present in water, and therefore the general feeling is that they do not retain their vitality for any great length of time. It is proper to state, however, that no process of filtration is perfect, and that no process of filtration gives absolute insurance against the occasional invasion of the water by dangerous substances, any more than do the conditions found in nature warrant the opinion that spring-waters are always and everywhere perfectly free from danger; but all experience on the subject, which is now very large, supports the opinion that, when properly managed under scientific supervision, this method of purifying water may be regarded as one of the best, if not the very best, of the artificial processes employed.

But the work of the engineer is not by any means complete when the community has been supplied with satisfactory water. After this water has been employed for various domestic, industrial, and municipal purposes, much, if not all, of it reappears in the form of sewage carrying the waste-products characteristic of the numerous uses to which it, when in the stage of pure water, had been put. The disposal of this mass of effete waste matters is, if anything, more of an engineering problem than the furnishing of a pure supply of water. In approaching this problem the engineer is confronted with two considerations that invariably influence the methods adopted for its solution: namely, the economic and the sanitary.

Without entering into a historic review of the various methods that have been employed and abandoned for the purification of sewage, it suffices to say that they may be roughly classified for our purposes as artificial and natural, both comprising numerous devices that differ from one another according to the views of the engineer proposing them. The majority of the artificial methods aim at the separation of the offensive organic matters in the sewage by various processes of

precipitation or sedimentation, the clear or partly clarified supernatant liquid being, as a rule, allowed to flow either directly or indirectly into a neighboring watercourse. There have always been a number of objections to these processes, for the reasons that they are expensive; the sewage is but partly purified, from the sanitary aspect; they necessarily mean a great accumulation of sludge that is always difficult to dispose of; and since they involve the use of chemical substances, they are thereby often operative in checking those natural biologic phenomena—to be referred to later—on which so much reliance is now placed for getting rid of these matters in the most effective manner. In consequence of these, and possibly other, objections the older processes of this character are now held in much less favor by sanitary engineers than are several of the so-called natural methods.

By the natural processes are meant those that aim to place the waste matters under conditions that are most favorable to the operation of those living agents through the activities of which all dead organic matters are disintegrated, decomposed, and caused to disappear from the earth's surface: that is to say, the microscopic plants generically referred to as bacteria.

Of the natural processes, that of disposal of sewage by way of watercourses and that of irrigation upon the soil are perhaps the most In the former we observe not only the chemical results of oxidation and precipitation, but the purifying action of the microscopic animals and plants in the water and in the sewage itself, the purification being due to their using up the organic matters as food; but we observe, in addition, the favorable influence of dilution as well, so that ultimately a watercourse into which sewage, in not too great an amount, is emptied will return to a condition, chemically speaking, fairly comparable to that which it possessed before pollution, providing, of course, that no further contamination occurs downstream. From this it might appear that there is no objection to the disposal of sewage in this manner. Such a conclusion, however, is unwarranted, for there are objections of sufficient gravity to justify the abandonment of this method if any other satisfactory plan is available. Thus, for instance, unless the current of the stream into which the sewage is poured be unusually rapid, there is a deposition of insoluble matters carried by the sewage; there is often, especially when the sewage is concentrated, destruction of animal life in the stream,

and sewage carrying the waste-products from certain industries always has this effect; there is a manifest infringement of the rights of individuals or of communities residing further down the stream, who may be forced to use the water as their only source of supply; and, finally, even though a sewage-polluted stream may ultimately undergo a certain degree of chemical purification in the course of its flow, it has partaken, through the contamination by water from human habitation, of an infective quality that often does not readily disappear, and that is certain at one time or another to menace the health of those using it for domestic purposes.

When sewage is allowed to flow into streams near the sea, the oscillations of the tide often prevent its complete removal; as the tide ebbs and flows the mass of waste material is washed back and forth, and remains practically where it is deposited, the solid particles slowly sinking to foul the bottom, some of the organic matters collecting along the shores and putrefying, and the whole, as a rule, becoming often a permanent nuisance. When deposited in the sea at a point where a current exists, sewage is rapidly swept away, diluted, and disposed of without offense.

In the process of irrigation, both superficial and subsoil, we have, from the sanitary standpoint, an ideal method when all details of construction have been carefully considered, and when everything is working satisfactorily; but there are objections to these plants also.

When in successful operation, we find the purification that sewage undergoes by percolating through the soil of a properly constructed and manipulated irrigation field to be essentially that purification which we observed in water purified by its passage through a "ripe" sand-bed. The two processes differ only quantitatively: that is to say, there is much more work to be done with the sewage than with the water. In consequence, the methods of operation differ in certain details from one another. As in the case of the water, we observe in the purification of sewage by this plan the accumulation of living and dead suspended matters upon the surface; the decomposition and nitrification of the organic matters; the separation of living and dead suspended matters by the process of straining; and, finally, we obtain an effluent that is from all standpoints incomparably better, both chemically and biologically, than that obtainable by any other method. Why, then, is this not the universally adopted plan? For several

reasons, of which the following are the most important: All soils do not readily lend themselves to the process, and many are not naturally suited to it at all; the area required is, relatively speaking, so great as to make this method impracticable for most large communities; since irrigation is practised intermittently,—that is, but for a certain number of hours daily,—and even then can not be practised for an indefinitely long time upon the same field, the reserve area that is to be used when a field is "resting" requires still further outlay in the cost of the plant; and, finally, the results obtained when the ground is frozen, and uniform filtration and bacterial activity are thereby diminished, are less satisfactory in winter than in summer. Of the objections enumerated, that relating to the area required for the work is usually the most serious.

To meet these objections a number of new devices have been suggested within the past few years. In general, these aim to so favor bacterial activity in the sewage that the objectionable organic matter may be rapidly eliminated at a moderate cost in a plant occupying a comparatively limited area. Of these devices I shall mention but one: namely, that generally known as the "septic tank process of Cameron," since it will serve to illustrate the principles that are involved.

If you will recall for a moment the biologic phenomena in operation in the process of purification by filtration through a sand-bed or by irrigation through soil, you will remember that the object aimed at was to favor a primary decomposition of the organic matters into their end-products and a subsequent nitrification of the most important of these end-products into inert substances of an inorganic nature: namely, nitrates and nitrites. You will recall, also, that, even under the most favorable conditions available at the time, the conversion of organic into inorganic matter is incomplete; and that often there is an accumulation upon the surface of the sand or the soil of a mass of undecomposed substances that check percolation, and that must be removed by mechanical means before the process can be resumed. You will further recall that in the case of sewage its application to the field is always intermittent, this being necessary in order to aerate the soil and to supply certain species of bacteria with the oxygen so necessary to the proper performance of their purifying functions.

In the newer processes of which I am about to speak still another peculiarity of particular species of bacteria is taken into consideration and utilized, and an understanding of this is essential to the correct interpretation of certain steps in these processes.

It was Pasteur who first called attention to the existence of bacteria that not only live and perform all their vital functions without the use of free oxygen, but to the activities of which species free oxygen is actually detrimental. Many of these species are constantly to be found in crude sewage, and on closer study of their peculiarities it is discovered that they possess one in particular that is of the greatest importance to the process of purification, providing the sewage can be placed under conditions favorable to the life of these anaerobic species.

Without entering into the chemical details, it is enough to say that this important function consists in their power to attack, disintegrate, and liquefy (digest, so to speak) the undissolved particles of organic substances in the crude sewage that are so troublesome to handle by any of the ordinary processes. With this solution of the suspended and the decomposition of the dissolved organic impurities by the anaerobic species the fluid mass is then found by experience to be in a condition most suitable to its successful purification by subsequent processes of filtration or irrigation.

Cameron has taken advantage of these phenomena in his device, now familiar to you all under the name of the "septic tank." In this process the crude sewage is allowed to flow very slowly into a large "air-tight" (?) chamber, the velocity being so slow as to bring the sewage almost to a standstill. In this tank the insoluble grit, dirt, and some organic substances are deposited, while other lighter organic matters rise to the surface in the form of a more or less dense scum. Since crude sewage carries no dissolved oxygen; since as much air as possible is excluded from the chamber, and since the gases arising from the decomposition of the sewage force out such air as was in the tank, it is evident that the anaerobic species at home in the sewage find in the tank conditions favorable to their activities, as is manifest by the progressive disintegration of the surface pellicle and of the masses of organic matters upon the bottom.

When the activities of the anaerobic species of bacteria have been in successful operation for a sufficient length of time,—which is deter-

mined by experience, varying with the character of the sewage,—the liquid is passed slowly from the septic tank upon filters composed of such porous materials as coke, slag, breeze, etc., arranged to favor the biologic activities of those bacteria which, as regards oxygen, are just the opposite of those in operation in the tank: namely, the acrobic species. Among the aerobic bacteria is that important group which, so to speak, puts the finishing touches to the process: namely, the nitrifying species.

The result of this composite plan is that from crude sewage an effluent is quickly obtained from which a very large proportion of the organic matters, both dissolved and suspended, has been removed, and which, in general,—in England, at least,—has met with the chemical standard legally set for such substances before they are permitted to enter a watercourse.

The process, while being a bacteriologic purification, does not supply an effluent free from bacteria; nor even one poor in bacteria, as is the case with properly adjusted broad irrigation;—but an effluent that is enormously rich in bacteria. Fortunately, this effluent, being comparatively poor in food, many of the bacteria contained in it probably die from want of nutrition. Should disease-producing bacteria be present, which must at times be the case, it is questionable if they find conditions favorable to a long life, although it must be admitted that their temporary presence in a stream is always to be regarded as a menace to the public health. Though this is an objection to the process, it is nevertheless one very easily eliminated, since we now know that an effluent of this character is very easily and economically handled by such processes as filtration through sand or broad irrigation, which will furnish an effluent from which practically all bacteria have been removed.

Of the numerous other processes, such as the Dibdin, the Scott-Moncrieff, the Lowcock, the Waring, etc., I shall not speak, since much of your time has already been consumed. It suffices to say that some, like the Cameron process, rely upon the action of bacteria alone, while others, aiming to do better than can be done by bacteria unaided, actually defeat their objects by the introduction of practices that in a way check bacterial activity; the preliminary precipitation with coagulants, for instance, in the Dibdin process may be taken as an example of this. In few, if any, of them do we find the finer dis-

tinctions between the various bacterial functions so intelligently recognized and systematically utilized as in the Cameron process.

To summarize briefly, then, we find:

That the most successful processes for the purification of both water and sewage are those that conform closely to phenomena everywhere in operation in nature.

That through the action of bacteria both water and crude sewage may be so purified as to conform to rigid sanitary requirements.

That this phenomenon is composite, and may be roughly conceived as a primary decomposition, and subsequent nitrification by bacteria, of the organic matters contained in the fluids.

That no matter how rich in bacteria water or the effluent from the sewage purification plant may be, it may be deprived of about ninety-nine per cent. of these bacteria by filtration through sand or by properly arranged irrigation.

And that, finally, neither the sand of the filter nor the materials comprising the soil are the real filter or purifying agents, but that the latter are always the living impurities, contained in the fluid being treated, that accumulate in the upper layers of the sand or soil and do the work.\*

## DISCUSSION.

WILLIAM EASBY, JR.—Even casual readers of engineering literature, particularly that which appears in periodical form, must have been impressed by the prominence which has been given in the last few years to the biologic side of sanitary engineering. A retrospective glance at municipal sanitation in this country shows, however, that we have not been slower in adopting better sanitary methods than might reasonably have been expected.

The progressive increase in this country in urban population from about three per cent. of the total in 1790 to about thirty-four per cent. at the present time; the wider dissemination of knowledge pertaining to transmissible diseases, particularly statistical matter; the necessity for protecting our water-supplies from sewage and other contamination, and of securing such protection at a cost within the financial resources of municipalities; and, not least, certain esthetic considerations, all are causes which have in the last decad operated powerfully to bring about certain bacteriologic and chemical investigations having for their ultimate object the determination of the most practicable methods for the purifi-

<sup>\*</sup>An excellent presentation of the several foregoing processes is to be found in "The Second Report of the Sewage Commission of the City of Baltimore," 1899.

cation of water and of sewage on such a scale as is required by populous districts.

In the United States the most important investigations of this nature are those made by the Massachusetts State Board of Health. When this body commenced its labors thirteen years ago, very little was known by sanitary engineers of the natural method of purification of organically contaminated waters. What was known at that time respecting this method was confined to a comparatively small number of investigators, whose work for several years was so largely tentative in its nature that it indicated the uncertainty with which they approached the subject. The special report of the Massachusetts State Board of Health of 1890, on water and sewage purification, was eagerly sought, and it gave to many engineers in this country the first definite idea of the processes of natural purification of water and of sewage. Prior to this, not a little had appeared on the same subject both in England and on the Continent, but it did not find a very wide circulation here, as it antedated the present period of general interest in sanitation, and was not always easily available.

With the full results of all important experimental work before us, and the conclusions drawn therefrom, statements of a conflicting nature appear, but less frequently now than in the past. This growing consensus of opinion and the observed results of practice have given sanitary engineers a confidence in, and an appreciation of, the work of the bacteriologist, and we now find the two associated on all sanitary works of importance. Specialized experimental bacteriology, developed both on its biologic and its chemical side, has largely fixed the general form, capacity, and manner of operating water-purification and sewage-disposal plants, and has also determined the suitability of certain filtering and straining materials to be used therein, and many other questions, most of which are of greater moment than those which are involved in the mere construction of such plants.

The abandonment or modification of old methods and practices for those which are new is always slow, even when the former are recognized as unsatisfactory and expensive. There is, among sanitary engineers, however, a rapidly growing belief that the process of disposal of organic wastes which most closely resembles that employed in natural purification will be the most successful and economic. This belief is based on the recognition that sewage matter contains within it certain vegetable organisms which are capable, when surrounded by natural environments, of breaking up complex organic compounds, and finally of mineralizing them; hence any treatment which acts antiseptically, such as the chemic precipitation of sewage, can not be expected to give a satisfactory effluent. We are indebted to the science of bacteriology for the discovery and exposition of these fundamental laws. Bacteriology is still a new science. Those who are best qualified to form an estimate of its practical value in sanitary questions are most sensible of its present limitations and of the very unsatisfactory state of its technic, which demands standardization most urgently, but even with these defects it has rendered a service to sanitary engineering which is too often underestimated.

JOHN C. TRAUTWINE, JR.—There is a strong popular prejudice against the use of purified impure water for domestic purposes; and inasmuch as the local administration has decided upon that procedure, it is important that the public should be made aware of the fact stated by Dr. Abbott, that the impure water which flows past our doors in the Delaware and Schuylkill Rivers can be artificially made as wholesome and attractive or as good as natural spring-water, so that the criticism to which the administration is subjected should be met and answered.

Among the objections most frequently urged against the filtration system adopted by the administration is that the operation can not remove organic impurities in the water, but Dr. Abbott has explained how the beneficent bacteria in the water attack and destroy these organic impurities, while most of the bacteria themselves are removed in a mechanical way, and the few that escape are carried away in the sterilized water, which has been deprived of the food necessary for their maintenance.

Those who doubt the efficiency of filtration often ask what becomes of the one or two per cent. of bacteria passing through the filter, and whether that very small minority does not immediately proceed to thrive and breed, so that the last state of that water may be worse than the first. Dr. Abbott has clearly explained how the escaping few, finding themselves in almost sterilized water, simply die from starvation.

That would be a sufficient answer to the question of increasing and multiplying, but the question arises, What becomes of the dead bacteria? The same question came up in regard to the septic tank. Is not that sewage laden with an immense number of starved and starving bacteria? In drinking-water the percentage passing through the filter is exceedingly small.

I take it that the self-purification of streams by bacterial action, which Dr. Abbott referred to, could hardly be expected to apply to mineral impurities—such, for instance, as sulphuric acid—thrown into the river from the coal-mines, and waste thrown in at places such as Manayunk and Lafayette.

One point, briefly mentioned by Dr. Abbott, raised rather a serious question: viz., whether preliminary steps in purification, prior to the final filtration, might act injuriously by depriving the water of that nutriment upon which the beneficial bacteria are expected to thrive. This question, at first sight, appeared to throw doubt upon the advisability of sedimentation as a preliminary to filtration. Those who are familiar with the Schuylkill River at times of flood will be strongly inclined to think that sedimentation is absolutely necessary in our case; but, in the light of what Dr. Abbott has told us, must we not fear that, when we remove the mineral matter brought down by the river, we are at the same time removing too much of that food upon which the activity of the beneficent bacteria depends?

Dr. Abbott's reference to the success of intermittent filtration in the case of sewage, as applied at Lawrence, brings up the question of continuous filtration as applied to water. If I recall correctly, the Lawrence water-filter plant is the only one in action in this country ever operated on the intermittent system, all

others being continuous. Indeed, I have the impression that at Lawrence they have abandoned the intermittent system and resorted to continuous filtration. We naturally ask, If intermittent filtration is so essential in the purification of sewage, why is it not at least equally important in connection with the filtration of water?

I have often wondered at the use of the word "nitrification" in describing the process which goes on in the bacterial destruction of organic matter. The resulting products are first nitrites and then nitrates, but it seems strange that the more fitting term "oxidation" is not more generally used. The process always consists in a progressive oxidation, and the use of the term "nitrification," which indicates an increase in the proportion of nitrogen, therefore seems to me to be misleading.

DR. ABBOTT.—I do not remember all the questions asked by Mr. Trautwine, but felt very much interested in his remarks, and will try to answer some of them while Mr. Trautwine looks over his list. The last question might be answered first—in regard to the use of the word "nitrification." His interpretation of it is entirely correct. It is purely a process of oxidation of ammonium compounds into nitrates. The reason that the word nitrification is used is that though other bacteria are concerned in the process of oxidation, there seems to be a special group which possesses the specific function of converting ammonium compounds into nitrates.

Another question—as regards the removal by bacteria of dissolved organic matters. That is exactly what bacteria do. Will bacteria remove urine from water? Of course. Bacteria are cultivated and studied in solutions of dissolved organic matter.

The reason of the difference between the treatment of sewage and water in that respect is this: sewage contains no dissolved oxygen. There is quite sufficient dissolved oxygen in natural water to supply the microorganisms in a sand-filter.

I do not know what becomes of the dead bacteria in sewage, unless they are consumed by the living bacteria. In the case of filtered waters, from which often considerably over ninety per cent. of the bacteria are removed, the death of those remaining in the water affords so little food as hardly to enable the small number of survivors to remain alive for any length of time. At Lawrence a striking diminution in the number of bacteria is observed as the water passes from the filters to the terminal ends of the mains in the city.

MR. TRAUTWINE.—How long the few remaining bacteria in the water would survive would, I suppose, depend upon the amount of nutriment given them, especially in perfectly sterile water.

DR. ABBOTT.—The question as to how long will microorganisms live in water free from food has been tested in the laboratory. Results in experiments of this kind are varied, but the general tendency is for the microbes to live but two or three days. Roughly speaking, somewhere between five and ten days is the limit of life of microorganisms in pure water.

The President.—Only yesterday a cablegram appeared in a Philadelphia paper regarding an investigation said to have been reported to the Royal Society

by Professor Dewar and other scientists, showing the survival of diphtheria, cholera, and typhoid bacilli after having been subjected to liquid-air treatment for prolonged periods. It seems that none of these microorganisms succumbed under this intense cold.

Dr. Abbott.—Similar experiments, with like results, have been made at the University of Pennsylvania.

E. M. NICHOLS.—I wish to ask one question regarding this filtering of water which we are likely to have in Philadelphia some day. We will assume that it leaves the filters ninety-eight or ninety-nine per cent. purer, so far as bacteria are concerned: How long could such water stand without being contaminated in any way from the atmosphere?

Dr. Abbott.—The contamination that is transported by the atmosphere is, so far as public health is concerned, not serious. The greatest difficulty with storing filtered waters in reservoirs, particularly when they are not covered, is that the growth of green algæ is favored. This may cause bad odors or bad taste, or both. When reservoirs are covered over and the water is protected from sunlight, there is no difficulty in this way.

MR. TRAUTWINE.—Will not that growth of vegetation furnish food for the bacteria that escape the filter?

Dr. Abbott.—I can not answer that question positively. It appears as if certain algae have the faculty of taking up and utilizing bacteria.

THE PRESIDENT.—I wish to ask a question bearing on the present house treatment of water in Philadelphia. If water be filtered and then boiled, is it certain that it will be effectively sterilized? or is it true that certain bacteria in the spore stage will survive boiling?

DR. ABBOTT.—With bacteria in the spore stage the majority are destroyed by boiling. There are some species which resist boiling for short periods. The microorganisms that we fear in water are easily killed, even by a temperature much lower than boiling. A temperature of from 68° to 70° C. will destroy the life of the typhoid bacillus in ten minutes.

With regard to the treatment of water filtered by household filters,—whether it should be previously boiled or not,—the plan I have always followed in my own house is to have the water filtered and subsequently boiled.

HARVEY LINTON.—I have a question which has some bearing on what will be done in our town of Altoona. Suppose that in this effluent from the tank and coke bed treatment the bacteria are not very much diminished: what will be the result of turning that effluent into a slow-running stream? How do you expect that to be satisfactory? Will not that treatment give offense?

PROF. ABBOTT.—From the analyses that are presented at the English stations, where this plant is in operation, I should say that the effluent from these plants could be turned into a stream of almost any size without trouble, for these two reasons: First, it has been almost deprived of its organic matter (it has not all been taken out, but a very large proportion of it); and, secondly, because it is so rich in microorganisms that the organic matter, as such, remaining will quickly be used up. I do not believe it would be offensive.

THE PRESIDENT.—An interesting fact in that connection is reported in the current numbers of the engineering journals. A decision has been recently handed down by the Supreme Court of Connecticut to the effect that the city of Waterbury will have to purify its sewage sufficiently, by a certain fixed date two years hence, to warrant its discharge into the adjacent stream without dangerous pollution. This decision, it seems, is directly contrary to certain decisions rendered in like cases in the West. It seems reasonable, however, to assume that the legal right of communities along the same stream to this sort of self-protection against each other will in time become generally recognized. This may result, in turn, as it has to some extent in Germany and England, in restrictive measures on the part of municipalities against the free discharge into the sewers of certain kinds of manufacturing refuse, especially such as may be detrimental to the purification system, whatever form the latter may take.

JOHN BIRKINBINE.—We hear much about bacteriologic investigations, but the detailed knowledge of this work is limited to comparatively few people, and the more the subject is investigated, the more firmly I am convinced of the necessity of having bacteriologic results determined only by competent and trustworthy persons. In chemical analysis we select certain chemists, to whom we send ores or metals to be determined, and others to whom we assign water for analysis, recognizing that in these lines they are specialists.

It is even more important in bacteriologic analysis that we should have one whose training and practice entitle him to be considered as a specialist, and whose methods are above question. To illustrate: I was present when samples were taken from a water-supply for bacteriologic analyses, to either condemn or approve the source. One person took samples in bottles, placed them in a satchel, carried them over a hundred miles, and certainly could not have reached his office in less than eight hours from the time the samples were taken; and as he would reach his office about midnight on Saturday, it is more probable that the samples were not treated until the following Monday. The second person took samples of the same water in carefully sterilized bottles, which he kept packed with ice. Any sample that had been delayed over five hours between the time of its collection and its arrival at the laboratory was discarded, and another one was secured.

This is merely given to illustrate how much depends upon careful sampling, as well as upon the care in determining results. If we rely upon the bacteriologic examination of water to determine its potability, this examination must be made by skilled, conscientious bacteriologists, with excellent laboratory facilities, or that which would be a source of protection becomes a danger. When water is filtered to remove the bacteria, it is essential that excellently equipped laboratories should be maintained, and that these should be in the hands of men upon whom we can depend every day of the year.

As soon as a municipality assumes the responsibility of purifying the water, the people are lulled into a feeling of security, and place their reliance upon a process that can only be maintained by conscientious, faithful work on the part of the bacteriologist.

## THE CANADIAN PACIFIC RAILWAY, FROM LAGGAN TO REVELSTOKE, BRITISH COLUMBIA.

WILLIAM S. VAUX, JR.

Read March 3, 1900.

The construction of the transcontinental line of the Canadian Pacific Railway and the development of the western provinces of the Dominion of Canada—Manitoba, Assiniboia, Alberta, and British Columbia—are so intimately connected that the history of the one almost of necessity includes that of the other. The first white men to settle in these regions were the agents of the Hudson's Bay Company, who built their forts along the branches of the Saskatchewan River, and even pushed into the eastern ranges of the Rocky Mountain system. The explorations of Sir Alexander Mackenzie and Sir George Simpson furnished some information as to the condition of the central ranges of the Rocky Mountains, about which practically nothing had been known before except from the vague accounts of Indians and stray hunters.

British Columbia being separated from the provinces to the east by great ranges of mountains, it soon became apparent that the natural barriers would be great obstacles to the development of this vast territory, and as early as 1834 the advantages of a transcontinental line were urged.\* No active steps were taken, however, until the British Government, realizing the importance of rapid communication between the Atlantic and Pacific in connection with its colonies in India and Australia, organized and sent out in 1857 an expedition under the command of Captain John Palliser. One of the objects of this expedition was to explore "that portion of British North America which lies between the northern branch of the river Saskatchewan and the frontier of the United States, and between the Red River and the Rocky Mountains," and "to ascertain whether one or more practicable passes exist over the Rocky Mountains within British

<sup>\* &</sup>quot;Canada: An Encyclopædia of the Country," vol. 11, p. 243.

the presidency of the late Sir Hugh Allen, and a contract was entered into with the Canadian Government by which it was to furnish \$30,000,000 in cash and 50,000,000 acres of land in consideration of the company completing the road. Outside financial aid failing, the company was not able to carry out its agreement; and political changes also took place, making it difficult for the Government to fulfil its part. It was accordingly decided in 1874 to carry on the work as a public enterprise, and in 1875 construction was commenced west of Lake Superior and on the Pacific slope of the Rocky Mountains. In 1880 the road was far from completion, when another change in the Government brought the original projectors into power again, and it was decided to revert to the first policy of constructing the road as a private enterprise, the Government, however, agreeing to turn over all the work completed or under construction, to furnish \$25,000,000 and 25,000,000 acres of selected land in the Fertile Belt, and to give right of way through public property, besides other valuable franchises. On the other hand, the Company agreed to construct about 2000 miles of road, and to complete within a period of ten years the transcontinental line joining the Atlantic and Pacific.

Many difficulties arose on the score of finance and construction, but on November 7, 1885, the last spike was driven at Craigellachie, British Columbia, 2555 miles west of Montreal. There was thus completed wholly in British territory one of the longest and, in places, most difficult railways ever constructed. North of Lake Superior immense cuttings in solid granite were necessary, while the grades, mud-slides, snow, and deep ravines of the Rocky Mountains required the greatest care and skill of the engineer. During the construction of the road \$2,100,000 were expended in explosives alone, while a single mile on the north shore of Lake Superior cost the sum of \$700,000.

It is to one of the most difficult sections on the road to construct and maintain, lying between Laggan and Revelstoke in British Columbia, and embracing a mileage of but 147 miles, that I wish to draw your attention this evening, and to explain some of the features of operation which must appeal to every traveler over the line. (Figs. 1 and 2.)

The Rocky Mountain system, as it stretches northward, converges and contracts, until in British Columbia it exceeds but little a breadth

of 500 miles, being composed of four principal ranges—the Rocky, the Selkirk, the Gold, and the Coast. In the construction of the railway it became necessary to cross all four of these ranges. The cañon of the Frazer River where it crosses the Coast Range being used by the railway, a high pass was not necessary at that point, but the other ranges, being greater in altitude and more continuous, required heavy grades and passes in valleys several thousand feet above sea level. A number of routes were surveyed, it being desired to keep at least 100 miles from the international boundary and as far south as possible, in order to avoid the severe winters of the far north, and at no place to exceed a grade of one per cent.

After crossing a wide expanse of prairie the eastern slope of the Rocky Mountain range is ascended without difficulty through the comparatively level valley of the Bow River, almost to its source. The "height of land" is reached in a narrow valley, 5296 feet above sea level, on each side of which great snow-capped mountains stand as sentinels. At no point does the grade exceed one per cent., the limit prescribed by the Government in its agreement permitting the construction of the road.

While the actual summit is at Stephen, the nominal one is at Laggan, a divisional point on the railway. Here engines are changed, and the whole train is given a thorough inspection before descending the steep grade of the Kicking Horse Pass. Once over the summit, there is a short space of comparative level, and then the increased grade of 4.4 per cent. is reached, down which the train is allowed to move at a very slow rate. Brakemen are stationed at every platform, and it is amusing to see them at times jump from the cars and run alongside to watch the working of the brakes. Engines specially designed for the heavy grades are used between Field and Hector, and it is not at all uncommon for four of these to be required to take the east-bound ex-This particular part of the road, press to the summit of the pass. nine miles in length, was constructed as a "temporary line" of much steeper grade than that allowed by the Government. The contract route lies upon the almost perpendicular sides of Mt. Stephen to the left, and would involve extensive tunneling, as well as passing directly beneath the forefoot of a glacier on this stupendous mountain, from which at times great masses of ice fall to the valley below.

At intervals on the grade are located blind sidings running up the

of the stream was reached, which was followed as far as its junction with the Columbia River at Revelstoke. This is a divisional point on the railway, and the crews and engines are changed. The pass over the Gold range is not high, and offers very little of special interest, while in crossing the Coast range the railway follows the canons of the Frazer and Thompson Rivers, thus avoiding a summit. A few sheds are necessary on the western slope of the Gold range, of similar construction to those used in the Selkirks (see Fig. 2); but the snowfall being lighter, the same difficulties do not have to be encountered. Some very heavy tunneling and cutting were required in the valleys of the Thompson and Frazer Rivers, a good part of which was constructed by the Government in the early days of the development of the country.

Thus the Rocky Mountain system is crossed after passing three summits, which, if their altitude is not great, still in location and construction required the greatest patience and skill on the part of the engineers intrusted with the task.

zinc; in another, white lead; in another, graphite; in another, ultramarine blue; and in another, a silicate (ground slate), which is known in the trade as Keystone. It is a material that is manufactured in the State of Pennsylvania, and it is a silicate of very considerable merit as a pigment in the paint business. Then there were plates coated with paint made from Prince's metallic oxid of iron, which is a typical oxid of its kind; plates painted with Canadian oxid, which is the purest oxid that I know anything about, containing more than ninety-five per cent. of iron oxid; and plates painted with iron oxid that has been highly heated, known in the trade as Crocus,—purple oxid of iron: that is, a dark, brownish-purple oxid, this latter being supposed to be nearly anhydrous. The others are partly hydrated and partly anhydrous oxids. Besides these, we have the same varnishes and raw oil put on plates without any pigment whatever. All these paints were put on in the same way—three coats of each. Then we have plates painted with red lead and with two mixtures of red lead and white zinc. Red lead and white zinc being quite a common mixture, largely used by the navy, this experiment was made at the suggestion of the naval authorities. We also put on two or three ordinary proprietary paints, such as Detroit graphite and Eureka paint-well-known and highly reputable paints. Then we put on some paints that are used expressly by the navy. You will understand that for these sea-water tests the cooperation of the Navy Department was essential. These plates were so placed as to be under guard all the time. There were sentries on guard watching the grounds and docks where these were placed, so that they were perfectly secure from any interruption, and the plates were actually placed in position by the officers of the United States Government, and were removed by the officers of the United States Government, and were by them inspected on their removal; so I felt that we were under very great obligations to the Department for the courtesy, and we put on any paints which they desired to have tested, among which were several paints used for the preservation of ships' bottoms against corrosion from fouling. Further than that, there were some varnishes and some enamel paints put on, such as I have already spoken of, which were then put in an oven and baked at a temperature, in most cases, of from 200° to 240° F. for a couple of hours. Also, there are some varnish coatings that have been used for several years in hydraulic

the twenty-gallon varnishes—which have given very good results, but, as a rule, the varnishes containing thirty gallons of oil are better than those containing twenty; and my conclusion has been that the varnishes for the highest degree of durability should contain between thirty and forty gallons of oil.

The effect of baking was not in most cases beneficial. cases, however,—that is to say, in those with coatings which were especially intended to be baked—the results were so much better than in the others that they form a distinct class by themselves. anticipated, and is confirmatory of the results which are obtained by previous experiments, which I described in an earlier paper before the American Society of Civil Engineers. Here are some plates, for example, which were in the Norfolk Navy Yard two full years; and when they came out of the water, they appeared to be absolutely uninjured. You understand that these plates have been rattled about a good deal. In the first place, they were packed up by the naval authorities at Norfolk. They were taken out of the frames in which they were suspended,—the rack,—and after lying there for a couple of weeks, being examined as deliberately as they chose, they were packed up by the carpenter down there and shipped up to New York. Then at New York they were taken out of the boxes and carefully examined. Some time afterward they were repacked in other boxes and shipped to Boston, and I exhibited them there before the Boston Society of Civil Engineers in November. They were then packed again and shipped over to New York; then taken over to the Society of Civil Engineers and exhibited there, being unpacked and again repacked and then shipped over here. They, of course, suffered a good deal of abrasion during all that handling. The steel plates weigh from eight to twelve pounds each, and they do not bear severe handling very well. But, as I say, when these plates came out of the water they were apparently perfect on both sides. Some of these plates are aluminum, as you see. These were put in at the request of a friend of mine. Many of you, I have no doubt, knew the late Captain Hunt, of Pittsburg. Captain Hunt desired to have some of these tests applied to aluminum, and there is an aluminum plate which is exposed, showing the barnacles growing on it. Here I have another plate that has exactly the same coating. Now, on these plates, suspended horizontally, the barnacles attached themselves to the lower

oxid of iron, for example, mixed in pure oil, that is the way it is prepared. The best way is to take that out of the mixer and put it through a burstone mill. In that way little lumps in the pigment are broken up and the pigment is more perfectly and uniformly mixed with the oil than it otherwise would be. This, however, adds to the cost. It probably costs about twenty cents a gallon to put it through a mill after it has been properly mixed, and it probably is impossible for even a paint expert to say that a given sample of paint has or has not been put through a mill; so that practically nearly all the paint that is sold at low prices is simply put through a mixer. When you get into high-grade paints,—paints that are sold by reputable houses for rather high prices,—they are always ground through a mill, and sometimes they are put through two mills in succession in order to get them more perfectly combined. Sometimes a pigment is mixed with a small amount of oil in another kind of mixer, and is in that way made into what the paint men call paste. That is usually put through a roller mill or something of that sort. When that is sold, the purchaser buys linseed oil and mixes it himself. There is a great deal of paint sold in that way. These are paste paints. The paint manufacturer usually puts in a little turpentine,—not for the purpose of cheating, because at the present time turpentine costs more than oil, but to make it flow better,—and by so doing he increases the proportionate amount of pigment in the oil. Of course, turpentine is volatile, and in some cases he expects he will get a better result by having a larger amount of pigment. Some paints naturally require a very small amount of oil. White lead is an example; paste white lead consists of ninety pounds of white lead and ten pounds of oil. It takes very little oil to make white lead paint, and it is not good practice to put any considerable amount of turpentine into white lead paint, or into any paints which take a small amount of oil. One of the greatest objections to white lead is that it comes off easily—is short-lived. Now, I firmly believe (I am not interested in the white lead business or mixed paint business, or anything of the sort) that a great deal of the fault that is justly found with white lead is a fault which belongs to the painter: that is, he has thinned that white lead with turpentine or benzin instead of thinning it with oil, because it flows better, dries quicker, and is whiter. Oil yellows up white paint very much; and the result is that he does not have cementing material

enough to hold the pigment together, and, of course, it does not last. The oil which is used, as I say, is linseed oil. Of course, there are some substitutes for linseed oil on the market. I do not propose to speak of them, because the extent to which they are used is insignificant.

Linseed oil is made by pressure—by subjecting the flaxseed to pressure. Sometimes it has been extracted by solvents, but nearly all of it is extracted by pressure, and it is purified simply by allowing it to stand, at a temperature of from 70° to 90° F., in tanks, for two to three months, and that is practically all that is done to ordinary raw linseed oil. The big oil manufacturers have, within the last two or three years, improved the process of refining linseed oil for special purposes, but the ordinary raw linseed oil is made in that way. Raw linseed oil, spread out in a thin film, will dry in about five or six days. That is very slow; so, in order to make it dry more rapidly, we put dryers into it.

A dryer—take the simplest kind of dryer—is made by putting some linseed oil into a kettle and heating it, and stirring into it gradually some lead oxid—red lead or litharge, or a mixture of the two. The lead appears to dissolve in the oil, combines with it, and forms the compound lead linolate, which is soluble in linseed oil. gallon of oil you can put about four pounds of lead oxid, and usually put in also a little manganese oxid. A mixture of lead oxid and manganese oxid is better than either one alone, but a comparatively small amount of manganese oxid is used; only a small amount is necessary. That mixture, made by taking about seven and a half or eight pounds of oil and four pounds of lead oxid,—the lead linolate which is made in that way by simply heating the two together,—if allowed to get cold, would be a hard cake; but before it gets cold it is thinned down, either by the addition of oil, or, usually, by the addition of turpentine, which dissolves it, or benzin, or something of that sort. In that way the gallon of oil that you started out with will make about four gallons of dryer, containing, as I say, about four pounds of lead oxid. Now, why should that lead oxid be put in there? It is for this reason: when linseed oil dries, it dries, not by a process of evaporation,—as alcohol does, for example, or as water does,—but by oxidation. It takes up oxygen from the air, and the film actually increases in weight. It shrinks in bulk, but increases

in weight. If you put a film of linseed oil on a thin piece of glass or a thin piece of metal and weigh it carefully, and then allow it to dry thoroughly hard, you will find on weighing it again that it has actually increased in weight. That has been known for more than a hundred years. The film takes up oxygen from the air. What we want to do by the addition of dryers is to make the oil take up oxy-It does that if it has a small amount of lead or gen more readily. manganese dissolved in it. I shall not go into the theory of the matter here, because it is a chemical problem, and probably would not interest you very much; but it is a fact—it is a well-known fact, and there is no question whatever about it. The presence of a small amount of lead in it greatly facilitates the union of the oxygen with the oil. If you put four gallons of dryer into a barrel of oil, it will make all that oil increase in its capacity for taking oxygen so much that a film of it will dry reasonably hard in twenty-four hours. It will dry as hard in twenty-four hours as it would before in five days. Oil which has been thus treated is called boiled oil. In early times, say, thirty or forty years ago,—when it was desired to prepare oil so that it would dry readily, it was put into a kettle,—the whole barrel of oil, for example,—and the four pounds of lead oxid were dissolved in it at a high heat, and hence the oil was said to be boiled. Some oil is treated so now; but you see that the actual amount of oil combined with the lead is comparatively small; so the great crushers, such as the National Linseed Oil Company, and all such people, take a portion of oil,—for example, ten gallons of oil to dissolve four pounds of lead oxid,—and then they mix that hot with the other forty gallons of oil. Of course, it is carried on on a larger scale: that is, five or six hundred gallons of oil are put in dryers, and after that into a very large tank of oil, the whole of it being heated at a temperature of 200° F., and it is thoroughly mixed by stirring. That is sold as boiled oil. It is probably much better than the oldfashioned boiled oil. The small-scale manufacturer, however, can buy his dryer made in the way which I have described from some of the varnish makers. It is great business: he buys his raw oil in the barrel; takes the bung out of the barrel and pours out four or five gallons, and pours in four or five gallons of dryer, and rolls it about until it is mixed reasonably well, and that is boiled oil. That oil is said to be "boiled through the bung-hole," and is spoken of disrespectfully by the large-scale manufacturers; but small dealers say it is just exactly as good as any, and I know some very large users of oil who prefer oil which they make themselves in that way to any which they can buy. I believe Dr. Dudley, of the Pennsylvania Railroad, claims that has been more satisfactory than any other way for preparing oil. The dryer, of course, is more expensive than an equal volume of oil; but you can make an excellent dryer without using any linseed oil at all by dissolving your lead oxid and manganese oxid in rosin. Rosin is an acid substance, readily unites with these things, and is readily soluble in oil, turpentine, and benzin. Rosin does not cost much, and benzin is pretty cheap, and consequently the dryer which is made in that way can be sold at a lower price than oil; not only that, they do not use anything so expensive as rosin nowadays. They use rosin-oil, which is even cheaper, and I know a rosin-oil dealer in Cincinnati who is making vast quantities of dryer in that way which he sells for about eighteen cents a gallon. Now, when linseed oil is worth fifty-two or fifty-three cents, the temptation is great for a man doing this kind of business to put in an extra amount of dryer, making "double boiled oil"; and the more he puts in, the cheaper it is, and the quicker it will dry, but every bit of dryer you put into paint is a damage to it. There is no doubt about that. The dryer lessens the life of the film.

A raw, linseed-oil film is better than a boiled linseed-oil film; but it takes a longer time for it to dry, and it is a nuisance, and there are various objections to it; so that it is practically better to use boiled I will admit that. But for the actual durability the raw oil is best, and there is absolutely nothing to be said in favor of any scheme for putting rosin into linseed oil or into varnish, excepting that it is cheap. Rosin is a damage to anybody that uses it. So that if we are going to use linseed oil,—boiled oil,—I should either buy it as boiled oil from some reputable house (the large-scale linseed oil crushers make absolutely reliable products, so far as I know), or I should buy the dryer from some equally reliable people who know all about it and who would furnish a good article for a reasonable sum of money, and mix it myself. The more dryer you have in, the worse your product is going to be. So you can see that no two men are likely to make boiled oil the same in its composition or character, because the different temperatures at which they cook it, the different amounts of

dryer they put in, and all that, will change the product, and boiled oil is nothing in the world but a name. Boiled oil is very much more difficult to analyze, and consequently much more liable to adulteration, than raw oil. Boiled oil is nothing but a trade name for a class of substances of extremely varied composition.

I want to speak for a minute about the composition of varnishes the way varnishes are made. Almost all varnishes are made from linseed oil as one ingredient, and from varnish resins, which are spoken of by the varnish maker as gums. They are not gums, because gums are soluble in water; they are resins, and all are of vegetable origin. Most of these are fossil resins: that is to say, they are substances which have exuded from trees, and the trees have died and fallen to the ground. Resin is very much more durable than wood, and the lumps of resin gradually become buried in the ground and are found deposited from three to six feet below the surface. The natives go around with iron rods and prod around until they feel the lumps, and then dig down, and when they get a basketful, they carry it down to the nearest trader and trade it off for various things to eat and drink and wear, and it becomes an article of commerce. It is sorted and cleaned and shipped to countries where it is used. These resins are extremely various in their origin. Probably more resin than any other which is used comes from New Zealand. Resins come from different places: in Africa, both from the west coast and from the east coast, and it is now being found in Brazil; some is found in Mexico and some is being found in Australia. A great deal has come from immemorial times from the Philippine Islands and from the East Indies, and these different resins vary in their value to the varnish-maker according to the kind of varnish they make. They differ in the matter of hardness, brilliancy, and color. A common kind—kauri, for example—will be found in at least a dozen different grades, ranging from pieces almost transparent and colorless to pieces which are very dark brown in color—perfectly opaque. The price of these varies according to the kind and color of the resin, varying from about seventy-five or eighty cents a pound for the higher priced resins down to five or six cents a pound for some cheap products. actual method of making the varnish in the kettle is not very different from what it was thirty or forty years ago; the varnish-maker takes about a hundred pounds of this resin and puts it in a flat-

bottomed kettle, holding, say, a hundred and fifty gallons. This makes a layer over the bottom of the kettle three or four inches deep. This kettle is mounted on a little cart with iron wheels, and it is wheeled over an exceedingly hot coke fire. The varnish-maker stirs it with a stirring rod, and in the course of about half an hour the whole of the resin is thoroughly melted. It has lost in this process about one-fourth of its weight, from twenty to twenty-five per cent. having gone off in a pungent vapor. The varnish-maker has some refined linseed oil, which is also hot, at hand; he takes this kettle with melted resin in it off the fire, and an assistant ladles the hot oil into the resin while the varnish-maker stirs it. Of course, you will see at once that the kind of varnish will depend primarily upon how much oil is put into that unit amount of resin. The smallest amount of oil used in any of these varnishes here was twenty gallons to the hundred pounds of resin. Twenty gallons of oil weighs a hundred and fiftysix pounds, and the hundred pounds of resin has been reduced to about seventy-five pounds in the process of melting; so that there is about twice as much oil as there is resin in a twenty-gallon varnish. The smaller the amount of oil, the more brilliant and harder the varnish will be. If we wish to varnish a piece of household furniture, we will not put in more than twelve gallons of oil. We want it hard, brilliant, with a high refractive index, to give a high finish; and need a very hard varnish,—a very high polish,—and for such uses it need not be very elastic; but for the outside of a carriage, for example, which is to be exposed to the weather and to rapid and severe changes of temperature, while we desire to have as much luster, of course, as possible, we want something elastic, so that these finishing varnishes to put on carriages should contain from twentyfive to thirty gallons of oil to the hundred pounds of resin. These varnishes, you see, differ primarily, then, in that respect: the amount of oil that we use. The varnish-maker, of course, speaks of these as ten-, twenty-, and thirty-gallon varnishes. That is the way they are described in the factory. Of course, the trade names under which they are sold have no real meaning to the man who makes the varnish; they have only a traditional meaning. After the oil has been put into it, the kettle is put back on the fire and cooked at a temperature ranging from 400° to 550° F. for several hours until the material is thoroughly combined, which the varnish-maker judges by certain tests

with which he is familiar. It is then drawn off the fire and allowed to cool down to about 300° F., and then thinned down with turpentine, or, in the case of cheap varnishes, with benzin, until it is so thin that after it has become cool it will be of the proper consistency to work under the brush. The turpentine is put in as a vehicle simply to thin down so as to work properly and spread. These oil and resin varnishes are all made in that way, and that is the kind of varnish which are used in the tests shown here. There are also varnishes which are made by dissolving the resin directly in a solvent. The most common and well-known of these is shellac. Shellac is a recent resinous substance, which is nearly or quite soluble in alcohol. It is dissolved in alcohol simply by agitation, and the varnish which is made in that way—shellac varnish—is of an entirely different character from the oil varnishes. It dries simply by the evaporation of the solvent, and the layer which is left on the surface of the wood, or whatever it is put on, is nothing but the original resin, the solvent simply having served to get it spread out in a uniformly thin film. There is comparatively little of that kind of varnish made as compared with the others. There is, of course, actually a very large amount of it used, but the amount is small compared with the other.

There was one plate here in the Boston set coated with shellac varnish, and that looks white, you see; but actually it was coated with D. C. shellac, and it looked a very dark orange-yellow in color when it was originally put on. That has been standing in the fresh water for two years without any appreciable deterioration, and it came out in excellent shape. The most astonishing thing is that shellac will not stand in salt water a week. It will not stand exposed to the weather—sun and rain. It will not stand a month. Now, it stood in fresh water two years, and came out just as good as when it went I am not interested in making shellac varnish, but that was a remarkable and extremely interesting thing, and there are, in my judgment, places in which shellac varnish could be used in hydraulic work because of certain qualities which it has. It dries very quickly, -in two or three hours, -and it can be put on metal; it can be put on a surface somewhat damp, because the alcohol would immediately take up the water, and ordinary varnish can not be put on such a surface as that at all.

Why should we put pigment into oil to make paint? We put pig-

ment into oil to make paint for three reasons: One is that the liquid thus made is thicker than the oil alone: that is, it makes a coating of greater thickness. You have no idea (unless you have made some experiments in the matter) how thin a coating of paint is. When a man says that a structure has not stood well, that a railroad bridge, for example, has not stood well because it has not been painted for three or four years and the paint has begun to go to pieces—I tell you it is a surprise to me that anybody can make a film so thin as a film of paint is which will last two or three years. I have measured the coating on some hundreds of plates by the simple means of taking a Brown & Sharp micrometer caliper and measuring the thickness of the plate with the coating on it, and then scraping the coating off and measuring the thickness again, and so getting the thickness of the coat of dry paint on it. For two good heavy coats of paint you can get a coating varying from 0.002 to 0.004 of an inch in thickness. That is very thin, and that coating is at least twice as thick as it would be if there were no pigment in it; so pigment is put in there, for one thing, to increase the thickness of the film. It makes it more substantial in body, just as sand makes a body in asphalt pavement. That is one thing. Another thing is that the film made in that way is a great deal harder and stands a great deal more abrasion than an This oil film is naturally soft and elastic, but the pigment in it makes it harder and makes it very much more durable in that way. The third thing is that an oil film (as has been pointed out by Dr. Dudley and several others) is always porous. Now, we mix pigment in it for the purpose of filling those pores. It practically does No paint is absolutely nonporous; but it is very much less porous if it has pigment in it.

The finer the pigment is, the better the paint is going to be in all these cases. Now, if that is what pigment is good for in paint, why should it not be just as good mixed in varnish? Of course, we have been using varnish on furniture, railroad carriages, and all that sort of thing, for a long time. There are violins in existence made three hundred years ago which have the varnish on them that was made by the man who made the violin, and a considerable part of the value of the violin is believed to be due to the peculiar varnish which was used, and this was made in the same general way that I have been describing to you. The furniture which was made a hundred and

fifty years ago by Martin, a celebrated maker of Paris, is still distinguished by the beauty of the varnish on it. Varnish is a thing which It lasts immeasurably longer than an oil film does. But if pigment is found so advantageous in oil films, why should we not put it into varnish? We do. That is the way enamel paints are made, and enamel paints are just as much better than varnish alone, as regards durability, as oil paints are better than oil without pigment. the varnish paints shown here stood perfectly well for very long and severe exposures, where the corresponding varnishes have deteriorated very much, and where the oil paints have been entirely destroyed. The reason why varnish is better than oil is that it is more durable, smoother, and more brilliant, and because the resin dissolving in the oil makes it harder; it makes a film that is harder, and still retains a very high degree of elasticity—not so much elasticity, perhaps, as the original oil alone, but a very high degree of elasticity; and it is very much more impervious to moisture than oil. That has long been known. Varnish for very many years has been used to protect oil paints. You paint a coach or a railroad carriage with paint, and then you varnish it on the outside to protect the paint; that is a wellknown thing. The use of enamel paints on structural metal work is not very common in this country. I have been very much struck, however, in correspondence I have had with foreign members of the International Society for Testing Materials, with the fact that at least half-more than half, I should say-of the inquiries which are made by these foreign authorities on the paint question have reference to the use of these varnish paints. They seem to be very common, or at least comparatively common, in Europe. I know that certain particular structures were painted that way a long time ago. It seems to me, from the correspondence which has come to me within the last couple of years, that the use of varnish paint is comparatively common.

## DISCUSSION.

THE PRESIDENT: Of the many important and unsettled questions connected with engineering there is probably none more important, and certainly none more thoroughly unsettled than this question of paint. It is an open secret that the engineer knows very little about paint: What it should be; how it ought to be applied; how much extra expense may properly be incurred for one kind more than

another on account of its superior properties, and so on. This is evident from our specifications, for notwithstanding that they enter with great minuteness into the requirements for the material, allowable unit-stresses, etc., yet in the matter of paint we find the same vague platitudes with which we have been long familiar. The inspection is also apt to be slighted. The paint itself is seldom critically tested, and usually not inspected at all.

To a certain extent we, as engineers, can evade the responsibility by placing it upon the chemist. In order that a satisfactory remedy may be brought about, we must, however, cooperate willingly and intelligently with the chemist. It is for the chemist to point the way, which must, of course, be adapted to practical conditions. It is for the engineer to give this matter more careful consideration, especially in studying the value in actual service of the paints proposed by the chemist. Unless that is done much progress is not to be expected.

S. P. SADTLER.—I have had no experience in this work, but in the line of remarks made by Professor Sabin when he went into the discussion of paints and varnishes in general I agree with him. I agree with him decidedly on the question of linseed oil substitutes. I have had occasion from time to time in recent years to analyze varnishes, and I know how very cheaply and how very poorly some of these things are made now which pass for dryers. There is no doubt but what it has been a very serious drawback to good work, especially in varnishes—this matter of substituting rosin and rosin-oil; and there is generally now a feeling of condemnation of such products in which rosin-oil is claimed to be in any way equal to linseed oil. Linseed oil, of course, has a notable drying power, and there is no other drying oil which seems to be at all equal to it. We have seen drying oils and other substitutes used in connection with it, but it seems to me always a case of cheapening, with no positive advantage at any time in the use of these substitutes. I agree, too, with Professor Sabin, to a great extent, in what he said in regard to the value of pigment in a varnish, making thereby a so-called enamel varnish. I remember having read what Dr. Dudley said about the fact of the existence of the porous character of varnishes; and I have no doubt but that enamel varnishes are distinctly the best kind. My experience has been entirely connected with the analytic examination of varnishes and enamels, and I have had no experience whatever in regard to this matter of exposure of metal to fresh and salt water—either of itself or coated with paints, varnishes, and enamels. I was very much interested in it. I have been interested in a somewhat similar question recently as to the possibility of getting some of these enamels which will stand exposure to strong acids, and had some correspondence with Professor Sabin on that matter. An enamel varnish which has There is great need for just been found to be acid proof is a great desideratum. such an article or just such a protecting film for metal, because we know the corrosive effect of acid when kept a considerable length of time in contact with metal. I am very glad that Professor Sabin has given us the full talk he has this evening, as there was a great deal that is not generally known. There is no doubt but that engineers will reap the benefit of a discriminating study of the question of paints, and the inspection of paints will have to be more of an important matter, probably, than it has been. It is not simply the question of pigment, but very largely as to what vehicle is used with it.

THE PRESIDENT.—Some experiments have been in progress in the city for a period of years. I do not know whether the results are in shape for report of publication, but if Mr. Webster, of the Bureau of Surveys, or Mr. Mills is present, I hope we shall hear from one of them.

C. M. Mills.—In the absence of Mr. G. S. Webster, I will refer briefly to the practice of the Bureau of Surveys in reference to painting and to certain tests of paint materials used by the Bureau. The importance of the quality of materials and methods of application has been recognized, and the utmost care has been exercised to secure good results. The specifications have prescribed the quality of all materials, the preparation of surfaces to be painted, and workmanship in applying the shop and field coats. Analyses have been made of oils and pigments prior to acceptance for use. It is very difficult, with the prevalent practices in the shops, to regulate properly the shop-coats, which affect so materially the ultimate results. The increasing scrutiny of this detail of structural work by engineers will result, it is hoped, in the recognition of its importance by shop managers, and in more attention to its execution.

In view of the large number of bridges over railways in the city, it was desired to find the best preservatives to be applied on metal exposed to the fumes from locomotives. Paint manufacturers were invited to submit samples. Fifty-four sample plates were received, which represented the makes of twenty-two manu facturers. Forty four of these plates were in duplicate, representing twenty-two Twenty-two were put up over the northbound main track of the Philadel phia and Reading Railway, under the Columbia Avenue Bridge, and the other twenty-two were put over an adjoining side track. The Columbia Avenue Bridge was selected as a typical structure with low head-room (about sixteen feet). The plates were twelve by twenty-four inches in size, coated on both sides with such preparations as the manufacturers preferred to use, and which they recommended as being best adapted for such service. Two wooden frames were made, each containing eighteen compartments, the plates resting flat on their edges, so that both the upper and lower surfaces were exposed. The first lot of plates was pu up in August, 1897, and after thirty-five days' exposure, on being removed for examination, it was found that the coatings on the lower surfaces had been in many cases entirely destroyed. It appeared as if the severe action of the cinder coming from the locomotive stacks and the heat had destroyed the vehicle, and the abrasion had been so severe that out of eighteen plates, fourteen were much pitted, with very little covering left. As it was understood with the manufac turers that the information derived from these tests was solely for the use of the Bureau, and not to be made public, I can not give particulars; but it may be interesting to the Club to know, in a general way, what the results were. One of the plates of this lot which stood best, both on top and on bottom, was primed with red lead, and had one additional coat of a proprietary composition. The bottom, or most exposed surface, was well preserved over about four-fifths of its The upper surfaces of three plates of this lot were in excellent condition. The plates were exposed in six groups, the conditions being practically the same in each group. We found, after removing the plates from over the main track, that none was in such condition as would warrant its being reexposed. The plates over the side track remained in place nearly eight months, and in most cases the coatings on their lower sides, exposed to the exhaust of the locomotives, were so seriously affected that they were, in about one-half of the specimens, practically destroyed, and the others were seriously injured. The worst specimens were full of blisters, pitted with rust, and presented a pock-marked appearance. The upper surfaces of the plates over the side track were nearly all in good condition. A careful record was made of the behavior of each plate,—of its location, time of exposure, and all the conditions affecting it, maintaining as far as possible an equality of conditions for the various specimens.

There are quite a number of structures in town in which the head-room is low, and from inspection of these, and the tests made, we came to the conclusion that for ordinary head-rooms—not exceeding about twenty feet—it is improbable that any paint is to be found which will remain, without some protection between it and the locomotive exhaust, to prevent the mechanical effect of the impact of Under new bridges the Bureau is placing wooden sheathing attached to the overhead structure, over the tracks. I would state in this connection that under the bridge built in 1894, on the line of Girard Avenue, over the Reading Railway tracks on Pennsylvania Avenue, where travel is almost incessant, and where engines are standing a great deal of the time, a sheathing of white pine was placed when the bridge was first built. The sheathing completely covered the whole under-side of the bridge. The metal-work of the bridge was painted with red lead, with a small admixture of lamp-black. The sheathing was painted with two coats of asbestos paint when first put up, and three months afterward with two additional coats of the same paint. The sheathing was suspended from 2-inch by 8 inch joists, and was nailed up close in place. years' service, in the summer of 1899, it was found that the paint was extremely well preserved. Inside the sheathing there was very little evidence of any deteri-It was sound and without sign of rust, excepting along the corners of certain plates, where the paint had been brushed out thin. Wood was selected for the service because it was thought that it would better resist the abrasion of cinders than metal sheathing, and the results have been very satisfactory. The sheathing was found to be sound and in excellent condition.

The Forty-ninth Street Bridge over the West Chester and Philadelphia Railroadbuilt in the same year, was similarly treated. I will further state, in connection with the investigation of paints, that on the west approach viaduct of the Gray's Ferry Bridge over the railway tracks it was decided to use some of the paints manufactured for this special service. There were six spans over the tracks, and six paints were used. As no other paints have been applied in the repainting of old structures, the behavior of an additional number will be obtained. The paint was applied at the shops, so that the manufacturer received the benefit of the priming as well as the field coats. It would have been desirable to have had the paints on one span, so as to insure a comparison under identical conditions of service. The

difficulty in accomplishing this was so great that we did not attempt it, and confined one kind of paint to one span, and it required great care to separate the material and to get the right paints applied. It is so difficult to get paint applied properly at the shops that I would be very glad if any one here has any suggestions, or knows of any system, whereby better results could be attained. At the shop the foundation for the field work is laid, and good painting in the field over inferior painting at the shop results in serious disappointment.

PROFESSOR SABIN.—Most of these plates are what are known to the trade as cold-rolled plates. They came to me with a bright surface; not absolutely the grayish-white color of the metal, but a large proportion of the surface was so. Some of it seemed to have a very thin film of bluish oxid that was practically all removed by a wire brushing to which it was subjected. There were a few old plates in that first set that were not that kind of metal. They were ordinary boiler-iron plates, and those I pickled and limed; but the pickling and liming, while it has been extensively used, and is extensively used to-day in Europe in shop-work and bridge-work, is not so nice and clean a method as is the use of the sand-blast; but one can not use a sand-blast everywhere, and can not use pickling everywhere. I suppose one could use the sand-blast anywhere that one could I believe that when the sand-blast has been used enough to perfect our knowledge of it, it will be found to be economic. The process of pickling is said, by those who have actually operated on a large scale, to be quite a cheap process, but it is longer. The iron has to be pickled, then the acid washed off, then limed, then subjected to the oven, and then the lime removed. uses iron that has a coat of scale on it (that is practically the way it comes), perhaps it is because of the limited amount of money that is available for a particular structure; but that condition has nothing to do with the paint test. When such a piece of iron is painted, it is not making a paint test at all. It is a scale Two pieces of iron, even two sides of the same piece of iron, can never be obtained with the same thickness of scale. Consider a large plate of iron or steel —an ordinary rolled plate, such as is made for pipe-line; a plate, say, seven feet wide and ten feet the other way. Such a plate will never be found which has a scale the same thickness on the same side of all parts of the plate; and when different pieces are cut out of that plate, the samples will give uniform and corresponding tests of different paints. It will be simply testing the different scales; and to make a paint test there is no question in my mind but that the only way is to get down to the clean bright surface. If we want to test the scale, that is another thing. I do not believe that we could get reliable results in regard to the different kinds of paints in any other way. In regard to the tests which Mr. Mills has been describing on that bridge-work, he came to exactly the same conclusion that I came to long ago: simply that paint is not a substance to be used There are places where one may use paint and varnish with good in such places. results, but such is not a place where either paint or varnish should be used, and any man that expects to preserve a steel overhead bridge, with sixteen or eighteen feet head-room, will be a victim of misplaced confidence. I see that the country is getting full of these things, and there has never been one of them yet that will

stand. If I were building a bridge like that, I should do as you have done here—sheath it up in some way. I think Mr. Jackson protected the Huntington Avenue Bridge in Boston with lead sheathing. It must have been on four years, and is said to be in very good shape yet. The lead used was sheet-lead; just how it was fastened I do not know. They painted the iron very smoothly and thoroughly, and then, after erection, put the lead on. I understand that it is satisfactory.

Jos. T. RICHARDS.—These tests were all made under water. Do you consider that they would be as reliable to be used on metal piers and on bridges? The problem that comes to me is, How can we protect iron-work about the salt water—not necessarily ships' bottoms, but iron bridges and piers?

Professor Sabin.—In general, I should say that these results practically correspond with the results which have been obtained from testing materials in That is not so in the case of some particular things which are specially intended for hydraulic work, and it is not true of some things intended solely for aerial work. Some of these paints we know will stand perfectly well for a long time in the air, but go to pieces immediately in sea-water. There are exceptions to the general statement; but as a general thing, taking the bulk of these tests, they correspond with the aerial tests which we are constantly carrying on. This particular set of tests (everybody is carrying on aerial tests) were of special interest because they were certainly the most extensive set of tests of this kind which have ever been made. One ought to be able to judge from tests conducted in this way what results are likely to be obtained on the average; but for a particular case, if one is going to make tests on plates the size of these, I do not believe we can get corresponding results unless the plates are cleaned. If we are going to test, say, ten similar bridges, each having four or five thousand square feet of surface, so that we can compare one bridge with another, then we get sufficient uniformity in each bridge, so that we can probably test your paints there; but with small pieces no two of them are sufficiently alike to get corresponding results.

L. Y. Schermerhorn.—Between 1872 and 1878 the Government constructed a landing pier at Lewes, Delaware, which consisted of hammered wrought-iron piles, supported upon cast-iron screw-flanges at the bottom. The pile-shatts were from 6 to 8½ inches in diameter. At an examination of these piles made in 1890 the following was noted: From the bottom of the bay to low water the piles were covered with a coating of mussels and shells from 6 to 8 inches thick. When these were removed, the surface of the wrought-iron was found filled with small cavities, of a streaky fibrous appearance, but not deeply corroded. surface of the sand the outer scale of the piles was generally still, smooth, and hard, with only a few rusty spots. Between low and high water the pile had been but little affected, but above high water the oxidation had been very marked, and showed in the form of loosened scales superposed on one another, and very materially increasing the diameter of the pile. These scales were easily removed by light blows of a hammer, and indicated a corrosion in many cases from 1 to 1 of an inch deep.

The diagonal bracing, which was of square rolled iron, was generally more deeply corroded than the hammered iron pile-shafts. This corrosion was specially noticed where the upset thread-ends had been welded upon the main rods. The screw-threads also generally indicated excessive corrosion, probably on account of the ends of the fiber being there exposed to the action of the air and salt water; occasionally a screw-end would be seen which was remarkably free from oxidations. All this iron had been originally painted with lead and oil paint.

At the date of the examination referred to (1890), a few of the piles were removed, which had been injured by a vessel collision. The cast-iron screwflanges were found in some cases to have been transformed, for some distance backfrom the edges, into a plumbago-like material, which was easily broken with the fingers. This same appearance was to be seen in spots over the other parts of the screw-flanges. I believe that experience has developed the fact that a light gray cast-iron, with a fine crystalline texture, resists the action of salt water better than dark-colored, coarse cast-iron.

In Lake Superior a cross-cut saw which remained immersed in that clear, pure water over winter was found, when removed in the spring, to contain spots, of several inches in diameter, of a black material resembling charred wood which could easily be forced out with the fingers. The remaining parts of the surface the saw were bright and new.

W. COPELAND FURBER.—I wish to ask for some information about quick-dring ship-paints.

Professor Sabin.—The vehicles in quick-drying ship's bottom paints are chiefly lacquers or spirit varnishes, made like shellac varnish; they are not actually made of shellac, but they are resins dissolved in benzin or some solvent that kind, which will dry very quickly. Very great durability is not expect from ship's bottom paints. The United States Navy requires vessels to scraped and repainted every six months; and if it is not done within nine month the commanding officer has to send in a report explaining why it was not done to repaint, it is necessary to put the ship in dry-dock, and that costs money every day it is there; so that it is better to use a paint which will dry very quick and without regard to very great durability. In the cases in which the solve evaporates the paint does not oxidize.

The New Yorks

TO THE PROPERTY AND

)

f ;

.

- ( 7 1

> 3 1

1

di mi sc tl

ot A

reflicit field gib

₩ se

cc tr

io

cl al th fr sc th T

es at

es

## THE DRAINAGE AND PROTECTION OF THE PHILADELPHIA LOWLANDS.

## HARRISON SOUDER.

Read April 7, 1900.

WE all know of the wonderful results accomplished by the persevering and painstaking Hollanders in winning their country from the waters of the ocean. We picture Holland as a land surrounded with dikes and intersected by ditches; in fact, the larger part of the surface is lower than tide-level, some of the polders in the Leyden district being as much as thirty-two feet below the sea. I doubt not that much of the sturdy, unflinching character of the Dutch has been developed by the unceasing battle against the encroachments of the ocean.

The floods of the Mississippi and the levees built to restrain the waters of this great river are more or less familiar to you. Few, however, I imagine, are aware that several thousand acres of fine arable land within the limits of the city of Philadelphia lie below the level of the tides in the Delaware and Schuylkill Rivers, cultivated under the protection of miles of surrounding dikes, and drained by numerous canals and ditches that lead the inland surface water and rain-water to the various points of discharge. This statement applies mainly to that portion of Philadelphia lying to the south of Porter Street and between the Delaware and Schuylkill Rivers, known locally as the "Neck," and to the meadow-lands lying west of the Schuylkill and south of the Chester branch of the Philadelphia and Reading Railroad.

A third low region is found along the Frankford Creek and the Delaware River, in the neighborhood of the Pennsylvania Railroad Delaware River Bridge. This last district is a comparatively small one, and is not shown on the map accompanying this. (Fig. 1.)

During the last few years I have had occasion to study these low-lying districts with reference to the drainage and protection of the same, and believing that the subject presents several points of

interest, and possibly some of value, I submit the following paper without further apology.

The meadow-lands in the "Neck" and in West Philadelphia comprise together about 12 square miles, of which about 6.2 square miles lie west of the Schuylkill.

The value of these mud-flats for trucking purposes and for hay-making was appreciated by the colonists, for we find that as early as 1760 the Greenwich Island Meadow Bank Company was formed under a charter granted by King George II. Other similar companies were formed subsequently.

The original act was entitled "An Act to enable the owners of Greenwich Island to embank and drain the same and keep the outside banks in good repair forever, and to raise a fund to defray sundry contingent and yearly expenses accruing thereon."

In 1804 a supplement to the enabling act increasing the company's powers was passed and signed by Governor McKean.

These companies built dikes, sluices or flood-gates, and cut drainage ditches. The board of managers "of five fit persons (owners of land)," was required to make at least four annual inspections of the works, and had the right to collect taxes for the maintenance of the same from all landholders benefited. The dikes were to be at least six inches higher than any known tide, and "where exposed to hard gales of wind and a high surf, were to be widened and guarded with stone-work." By the supplementary act the managers were authorized to levy on the goods and chattels of landholders refusing to pay the taxes.

Dr. S. Weir Mitchell, in his story of "Hugh Wynne," mentions the ditches in the southern part of the city, and tells of the British foraging parties gathering hay in the meadows west of the Schuylkill.

Figure 2 is from a photograph of the original map of the meadow-lands in the southern part of the city, including the Greenwich Island Company's lands. The map was drawn in 1787, and shows the conditions existing there in those early days. It is interesting to note that Hollander's Creek was navigable by fair-sized vessels for some distance from its mouth.

Nearly all these fenlands are from 3 to 4 feet or more below the level of high tide in the rivers, and are surrounded by earth dikes of various heights and cross-sections. An inside footing ditch 10 feet

and the city has obtained a substantial return. In the year steps were taken to increase the efficiency of the pumping station enlarging and deepening the forebay and lowering the suction 2 feet, by which it is expected to further reduce the ground where the changes are now under way. It is also intended to dredge deepen the ditches all over the territory in order to deliver the way promptly to the pumps.

In very wet seasons the pumping station is absolutely essentian the comfort of the property owners in this section and to the secuof the crops.

It has never yet been necessary to work this plant to its full capity, one pump working a few hours a day being sufficient to a the demands, and it is fully ample to meet the additional requirement due to lowering the suction pipe. The expense of maintaining plant is \$5000 per annum.

The use of centrifugal pumps in draining lowlands may seem to the best plan, and no doubt is the safest, if there is plenty of result power, in that the water can be discharged over the dikes at all time

The main object to be sought in these installations is to get water off the land in the quickest possible time, to prevent the scale ing and rotting of the crops. Properly designed tide-gates will this, provided the winds are not adverse, in which case pumping man be resorted to. The new sluices in the "Neck" have thus far provided to all demands, and require but part of the attention of comman.

I am of the opinion that the most economical method for the Philadelphia lowlands would be to install a medium-sized pumping plant in each district, for use in emergencies only, such as continued high tides due to adverse winds or continued periods of excessive rainfall, and to provide a sufficient number of well-built sluices or tide-gates to carry off water under usual conditions. The pumps in this case should be driven by electricity, with a metered supply, thus saving greatly in operating expenses.

The care and maintenance of the dikes and of most of the sluices is still in the hands of the original Meadow Bank Companies, who keep a few men employed steadily in digging out musk-rat holes in the dikes. The city takes care only of the main waterways or canals, the roadside ditches in some cases, the pumping station, and the two new sluices.

```
122
```

and ste p en 🏿 🕏 2 **F** Th « dee 1

pro=

I. the of #1

II1 ity, the due

plar T

the pow

wate ing

this.

be r equa

niaiv

I Phi!

plazz


high rain tide.

this thus

T still

a fev

The ditcl

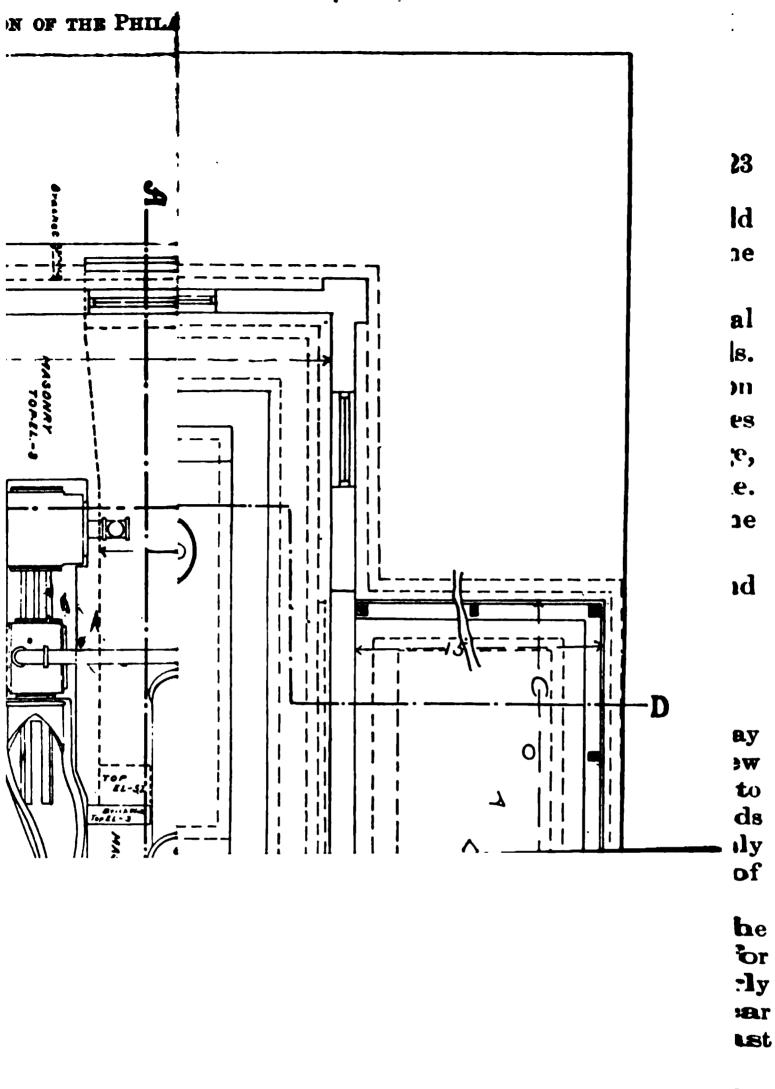

Le, ck On he is it

- 2 - 2 - Co12

ar

ste

en

2

TI

de

pr

the

of

ity

the

du

pI€

th€

po.

wa

ing

thi.

be

eq t

ma J

Ph

pla

hig

rai z

tid€

thi≤ thu.

I

stil 1

a fe

The

ditc

if they could run constantly and take the water away continuously, day in and day out, as water is supplied to the city. Regular service would demand small pumps, but as the equipment may have to remove water which falls in considerable volume at intervals, and remove it rapidly, large capacity is essential, and economy of operation is of secondary importance.

As to Mr. Souder's suggestion of operating a number of small pumping stations by electricity from a central plant, this probably would be advantageous if the ditches were made to have a short run to the pumps. In West Philadelphia it might be necessary to remodel all sluice-ways and ditches, some of which have been in place for perhaps a hundred years, many being quite old; and the chances are that any such modifications in getting water to the outlets would be met with considerable opposition. The main sluices and the laterals are already in place. Changes may affect the rights of the property owners.

Mr. Souder.—I would like to add, in connection with Mr. Birkinbine's last remarks, that, of course, the suggestion was made on the basis that the necessary land could be obtained, at selected sites, on which to construct the sluices and pumping station in the proper manner with proper drainage connections. In that case the combination of sluices with a pumping plant driven by electricity would be the best solution of the problem.

### ABSTRACT OF MINUTES OF THE CLUB.

REGULAR MEETING, February 3, 1900.—The President in the chair. Seventy-three members and eight visitors present.

Dr. A. C. Abbott presented a communication on "The Utilization of Bacteria and Bacteriologic Methods in Modern Sanitary Engineering." The subject was discussed by Messrs Easby, Linton, Trautwine, Marburg, and Furber.

Business Meeting, February 17, 1900.—The President in the chair. Thirty-three members and two visitors present.

Amendments to the By-Laws affecting the method of electing members were discussed at length and laid over for ballot under the rules.

The Tellers reported the election of F. W. Gordon to active membership; R. G. Griswold and M. E. Davis to junior membership; and S. Solomon to associate membership.

The paper assigned for the evening was by agreement postponed until the next meeting.

BUSINESS MEETING, March 3, 1900.—The President in the chair. Sixty-nine members and seven visitors present.

William S. Vaux, Jr., read a paper on "The Canadian Pacific Railway from Laggan to Revelstoke, B. C." The subject was discussed by Messrs. Schermerhorn, Webb, Christie, and Marburg.

Dr. Leffmann exhibited a section of a tree trunk that showed the surveyor's initials on the bark, and also the same initials very clearly on the inner portion separated from the bark by twenty rings of growth.

The Tellers reported that the pending amendments to the By-Laws were adopted.

Business Meeting, March 17, 1900.—The President in the chair. Sixty-three members and seven visitors present.

A. H. Sabin (nonmember) presented a communication on "The Corrosion of Structural Metals, and the Principles Involved in the Protection of Them." The subject was discussed by Messrs. Marburg, Sadtler, Mills, W. R. Webster, Richards, and Schermerhorn.

The Tellers reported the election of Messrs. C. R. Buck, J. O. Clarke, J. W. Davie, and J. C. Nowell to active membership, and R. G. Dieck to Junior membership.

Business Meeting, April 7, 1900.—The President in the chair. Seventy-four members and four visitors present.

Harrison Souder read a paper on "The Drainage and Protection of the Phila-

delphia Lowlands." The subject was discussed by Messes. Schermerhorn and Birkinbine.

A memorial of the late Richard B. Osborne was read.

A series of resolutions recommending the reestablishment of the system of collecting data on rainfall and stream-flow within the limits of Philadelphia was adopted.

#### CONVERSATIONAL MEETINGS.

Conversational meetings were held on March 10th and April 14th. At the former meeting some illustrations of the methods of modern paper-making were given by Henry Leffmann; Mr. Schermerhorn called attention to some features of the Ship Subsidy bill pending in Congress, and also to certain cracks in the walls of one of the freight stations of Philadelphia.

At the meeting of April 14th John C. Trautwine, Jr., and Edwin F. Smith presented communications in regard to Domestic Filtration, and the subject was discussed by a number of those present.

About twenty members were present at each of these meetings.

### ABSTRACT OF MINUTES OF THE BOARD OF DIRECTORS.

REGULAR MEETING, February 17, 1900.—Present: The President, the Vice-Presidents, Directors Levis, Souder, Christie, Piez, and Smith, the Secretary, and the Treasurer.

The Treasurer reported:

The resignation of Mr. John L. Moyer from active membership was accepted to take effect December 31, 1899.

The President presented a letter from Mr. F. H. Newell, Hydrographer of the United States Geological Survey, relating to the abandonment of the observations on rainfall and stream-flow in Philadelphia county, and the matter was referred to the Committee on the Relations of the Engineering Profession to the Public.

The Finance Committee presented a report of the assets and liabilities of the Club.

Tellers of Election were appointed as follows: H. V. B. Osbourn, W. L. Webb, H. W. Latta; alternates, R. G. Develin, G. B. Taylor, G. N. Leiper.

Auditors for 1900 were appointed as follows: W. P. Dallett, H. W. Spangler, R. L. Humphrey.

REGULAR MEETING, March 17, 1900.—Present: The President, the second Vice-President, Directors Levis, Souder, and Piez, the Secretary, and the Treasurer.

The President presented a letter dated February 26th, in which the Club was requested to cooperate with other societies of Philadelphia in the formation of an Art Federation. The President was instructed to act as chairman of a committee of three members to represent the Club.

The Treasurer reported:

Appropriations were made as follows, available before July 1, 1900:

The transfer of Percy H. Wilson, George B. Bains, 3d, and Herman Livingston from junior to active membership was authorized upon recommendation of the Membership Committee.

### ADDITIONS TO THE LIBRARY.

FROM COMMISSIONER OF PATENTS, U. S. Annual Report, 1898.

FROM AMERICAN SOCIETY OF CIVIL ENGINEERS.
Transactions, Vol. XLII, December, 1899.

FROM GEOLOGICAL SURVEY OF CANADA.
Annual Report, Vol. X, 1897.

FROM FIELD COLUMBIAN MUSEUM, CHICAGO. Report Series, Vol. I, No. 5, 1898-'99.

FROM ALABAMA INDUSTRIAL AND SCIENTIFIC SOCIETY. Proceedings, Vol. IX, Part II, 1899.

FROM UNIVERSITY OF CALIFORNIA.

Bulletin of Department of Geology, Vol. I, Vol. II, Nos. 1, 4, 5, 6.

Geological Report, S. W. Branch Pacific Railway of Missouri. Narrow Gage Railways, Fleming. Hydrocarbon Gas Process, Gwynne-Harris.

FROM U. S. GEOLOGICAL SURVEY.

Water Supply and Irrigation Papers, Nos. 32 and 33.

FROM SUPERINTENDENT OF DOCUMENTS, WASHINGTON, D. C.

Attorney General, Annual Report, 1899. Bureau Animal Industry, 15th Annual Report. Commissioner of Education, Annual Reports 1898, Vols. I and II. Comptroller of Currency, Annual Reports, 1899, Vols. I and II. General Land Office, Annual Report of Commissioner, 1899.

FROM NEW YORK ACADEMY OF SCIENCES.
Memoirs, Vol. II, Part I, 1899.

FROM CHIEF OF ENGINEERS, WASHINGTON, D. C. Annual Report, 1899, Vols. I-VI.

FROM ASSOCIATION TECHNIQUE MARITIME. Bulletin, No. 10, Session 1899.

FROM GEO. W. RAFTER, M. AM. SOC. C. E., ROCHESTER, N. Y. Reports.

FROM SECRETARY OF WAR.

Reports 1899, Vol. I, Parts I-VI.

FROM NOVA SCOTIA INSTITUTE OF SCIENCE, HALIFAX, N. S. Proceedings, Vol. X, Part I, 1899.

### THE ENGINEERS' CLUB OF PHILADELPHIA

1122 Girard Street

#### OFFICERS FOR 1900

# President EDGAR MARBURG

Vice-Presidents

Term Expires January, 1901

HENRY LEFFMANN

Term Expires January, 1902

LOUIS Y. SCHERMERHORN

Directors

MINFORD LEVIS

Term Expires January, 1901

HARRISON SOUDER

W. PENN EVANS

JAMES CHRISTIE

Term Expires January, 1902

CHARLES PIEZ

EDWIN F. SMITH

Secretary

L. F. RONDINELLA

Treasurer

GEORGE T. GWILLIAM

#### STANDING COMMITTEES OF BOARD OF DIRECTORS

Finance—Edwin F. Smith, Henry Leffmann, Minford Levis.

Membership—Charles Piez, James Christie, Harrison Souder.

Publication—Henry Leffmann, James Christie, Edwin F. Smith.

Library—Harrison Souder, Louis Y. Schermerhorn, W. Penn Evans.

Information—Louis Y. Schermerhorn, Charles Piez, Minford Levis.

Honse—Minford Levis, W. Penn Evans, Edwin F. Smith.

#### SPECIAL COMMITTEES OF THE CLUB

Relations of the Engineering Profession to the Public-John Birkinbine, Chairman, New Club House-W. Copeland Furber, Chairman,

#### MEETINGS

Annual Meeting-3d Saturday of January, at 8 P.M.

Stated Meetings—1st and 3d Saturdays of each month, at 8 P.M., except between the fourteenth days of June and September.

Business Meetings—When required by the Constitution or By-Laws, when ordered by the President or the Board of Directors, or on the written request of five Active Members of the Club.

The Board of Directors meets at 4 P.M. on the 3d Saturday of each month, except July and August.

### **PROCEEDINGS**

OF

# THE ENGINEERS' CLUB

#### OF PHILADELPHIA.

ORGANIZED DECEMBER 17, 1877.

INCORPORATED JUNE 9, 1892.

Note.—The Club, as a body, is not responsible for the statements and opinions advanced in its publications.

Vol. XVII.

JULY, 1900.

No. 3.

### THE BACTERIAL TREATMENT OF SEWAGE IN ENGLAND.

WILLIAM EASBY, JR.

Read May 19, 1900.

THE activity in England in the last ten years in developing new systems of sewage disposal is most largely due to the energetic steps taken by County Councils, under the Local Government Act of 1888, whereby they are empowered to enforce, under certain restrictions, the provisions of the Rivers' Pollution Prevention Act of 1876. Prior to 1888 infringements of this act were common, since its provisions were not of a prohibitive nature, but rendered offenders liable to action "on the part either of other sanitary authorities, or of any person or body of persons aggrieved by the commission of the offense."\*

To meet the legal requirements respecting the acreage to be used for sewage disposal and the purity of the effluent has in many localities been very difficult, or, owing to peculiar local conditions, unduly expensive. It is not strange to find, then, that a number of municipalities have engaged in the experimental study of the subject of sewage disposal with the hope of establishing methods better adapted to local conditions and to their financial resources than those

<sup>\*</sup> Local Government Board Circular, August, 1877.

required by the Local Government Board. None of these new systems may be regarded as having yet fully passed the experimental stage, but some have achieved a measure of success which has attracted the widest attention; notably, Dibdin's bacteria or contact beds, Cameron's septic tank, and Garfield's coal filters.

All complete systems of sewage disposal depend almost entirely on the vital activity of bacteria contained in and derived from sewage, but in none has this dependence become so conspicuous as in the so-called bacterial systems just alluded to, a circumstance which is responsible for the name applied to them. The most distinctive features of these systems is the avoidance of the formation of sludge, the high rates of treatment, and the low bacterial efficiency.

It has just been stated that all methods of sewage disposal are bacterial, or more correctly, considering the chemical changes attending bacterial action, biochemic, and it may also be repeated for the purpose of emphasizing a fundamental principle, that sewage contains the agents of its own destruction as sewage.

The composition and strength of sewage vary in different places, due principally to the nature and volume of the industrial wastes which are admitted into the sewers and to the mineral constituents of the water-supply and the per capita consumption of the same.

The object of all complete processes of sewage disposal is to transform the organic matter of sewage into the stable inorganic state, when it loses those objectionable qualities which characterize it, and ceases to be a menace to health. The extent to which this transformation has been effected is usually determined by the following chemical examinations.

1. By the estimation of the solids and loss therefrom by incineration.

The constituents of sewage, either in suspension or solution, other than free gases, are termed "solid matter"; this is divided into organic and inorganic matter, both of which are divided into matter in suspension and in solution. The quantity and character of the suspended matter are of great importance, as it is this matter which is responsible for most of the difficulty encountered in the disposal of sewage. The total solids are determined by evaporating to dryness a known weight of sewage, and an approximation of the organic matter in this residue is found by incinerating it. The loss in weight

a fluctuation in the state of the oxidized nitrogen between the nitric and the less oxidized nitrous form, due to the reducing action of certain bacteria.

All of the methods ordinarily employed in the chemical examination of sewage give results which may be properly considered only estimates, and while more exactness is desirable, it must usually be obtained at the expense of simplicity: on the other hand, these methods, if used with intelligence and care, the nature of their defects being known, give valuable comparative results.

Considering the variety and generally complex nature of the constituents of sewage and their instability, it is to be expected that the number of chemical compounds contained therein must be large. The nitrogenous bodies may be best represented by urea  $(CH_4N_2O)$ , a constituent of urine and the principal source of nitrogen, and by albumin, which is typical of an important class of nitrogenous principles found in food, the percentage composition of which may be expressed as  $C_8H_{13}N_2O_3$ . The carbonaceous bodies may be represented by carbohydrates corresponding to the general formula  $C_6H_{10}O_5$ , including cellulose, vegetable fiber, and starch.

That the vital activity of bacteria and the natural decomposition of organic matter stand to each other in the relation of cause and effect is now so universally accepted as to require here no proof. Decomposition is either putrefactive or nonputrefactive, depending largely on the absence or presence of free oxygen and of certain species of bacteria. Until quite recently it has been held that in the purification of sewage the former was to be avoided and the latter promoted. In the so-called bacterial methods, to be described, both processes are employed.

Those bacteria which require free oxygen for the exercise of their functions are known as obligate aerobes, and those which find the presence of this element in the free states inhibitive to growth, but which obtain it from chemical compounds, are known as obligate anaerobes; those bacteria which have the power of adapting themselves to either condition are said to be facultative. To this last class belongs the greater number of the bacteria found in sewage.

The active breaking-down of the more stable and complex forms of the organic solids of sewage into simpler forms, resulting in the liquefaction of the former, is caused either directly or indirectly by a


Prof. Arthur N. Talbot, of the University of Illinois, operated a small septic tank at Urbano, Ill., as early as 1894. His investigations were carried on without any knowledge that similar work was being done elsewhere.

There are several installations of this system in England which have furnished important information with respect to the septic process; notably, at Exeter, Yeovil, and Manchester.

The septic tank proper is a long, rather shallow reservoir, constructed of masonry, and usually placed partially below the ground level. Light and free access of air are excluded by a solid roof, but this covering is now known to be not essential. By referring to Plate I, which shows the plan and sections of the Exeter installation, the construction and manner of operating the same will be understood. Sewage enters the tank through two branch pipes, which are turned downward as soon as they reach the interior, and extend to within three feet of the bottom; they do not discharge directly into the body of the tank, but into two small wells termed grit-chambers, where nearly all of the sand and other street detritus is deposited; the sewage then overflows the wall separating this deposit from the main Flowing very slowly to the opposite end of the tank, the sewage has not sufficient velocity to support the remaining suspended matter, which is almost entirely organic; it is consequently deposite on the bottom, where a large part of it is liquefied, and passes from the tank in the general discharge, and as gas. The effluent pipe is a the opposite end from the grit-chamber, and at some distance below the water surface. It extends the full width of the tank, and slotted so as to admit the effluent uniformly and without disturbance It will be seen that, by thus trapping both the influent and effluent pipes, air is excluded. In this tank an inspection manhole containing glass windows has been provided to afford facility for observing the general condition of the contents. The effluent on leaving the tan passes over a measuring weir into an aerating trough, the edges which it overflows in a thin sheet, thus receiving some aeration at giving opportunity for the escape of gas generated in the tank at held in solution in the effluent. From the aerating trough the di charge from the septic tank passes successively through pipes leading to different sections of the filtering or contact area, the flow to t several beds being controlled by valves in the distributing we

### -SECTION E.F.

. ....

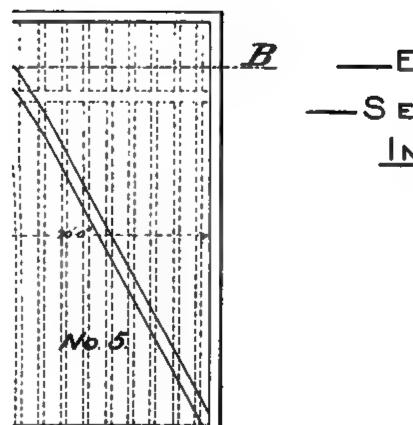

---EXETER------SEPTIC TANK--INSTALLATION

•

have afforded much information respecting the comparative value of the kinds and grades of material with which they are filled.

The biochemic changes which take place in the septic tank are not simple. When the organic matter of sewage is brought in contact with water, there follows a decomposition through the absorption of the group H<sub>2</sub>O. This action is known as hydrolysis, and where organic matter is concerned it depends largely either on the direct action of microbes or on the action of chemical bodies known as enzymes, which are of both animal and vegetable origin and many of which are secreted by bacteria. The anaerobic class of bacteria obtain their oxygen not from the air, but from the compounds in the sewage which contain it, thereby breaking down complex organic molecules, the atoms and radicals of which, being then in a nascent state, are readily oxidized, or in the absence of oxygen rearrange themselves into other compounds, some of which interfere with subsequent purification if they become too concentrated. This decomposition of complex organic solids is also a process of liquefaction, which it is the principal function of the septic tank proper to promote. Respecting the action of the septic tank, Dr. Rideal states: "It appears that the total dissolved solids are increased somewhat, but not in relation to the organic débris that has passed into solution. A large proportion has undergone the hydrolytic decomposition which we may represent in two forms:

"1. Producing nitrogen, methane, a small quantity of hydrogen, and carbonic acid, as in the general equation already given (expressing provisionally the percentage composition of albumin by  $C_8H_{1,3}N_2O_3$ ):

$$4C_8H_{13}N_2O_3 + 14H_2O = 4N_2 + 19CH_4 + 13CO_2 + 2H_2O.$$

"2. Producing ammonia, carbonic acid, and a large quantity of hydrogen:

$$2C_8H_{13}N_2O_3 + 16H_2O = 4NH_3 + 16CO_2 + 33H_2$$

"Both species of reactions go on simultaneously, along with others, according to the species of bacteria. The result is the production of a large quantity of inflammable gas, which can be drawn off by a pipe and made serviceable for heating. The ammonia and the major part of the carbonic acid remain in the solution." \*

<sup>\*</sup> Cantor Lectures on the Bacterial Purification of Sewage; London, 1899.

matter amounts to 30.4 grains per gallon, and in the filtrate, while the organic matter is entirely in solution, it still amounts to 24.2 grains per gallon. These figures seem to be inconsistent with the degree of purification as given by the oxygen absorbed and by the albuminoid ammonia. The loss on ignition in Analysis 2 is in contrast with these results, as it shows a satisfactory and progressive loss of organic matter.

The following analytical results will serve to show the purification effected by the Exeter installation:

ANALYSIS 1.—AVERAGE ANALYSIS FROM SERIES OF SAMPLES, BY DIBDIN AND THUDICHUM.

(RESULTS IN GRAINS PER IMPERIAL GALLON, = 1 in 70,000.)

					•								CRUDE SEWAGE.	TANK. EFFLUENT	FILTRATE.
Suspended solids,				_		_		_		_					
Mineral,		,											10.0	3.5	nil.
Mineral, Organic,	•	•	•	•	•	•	•	•	•	•	•	•	14.5	7.8	nil.
Mineral,					•						•		14.0	16.1	20.3
Organic,														14.6	24.2
Chlorin,								•					5.0	5.1	5.3
Oxygen absorbed in four	· he	ou	rs,										2.028	1.405	0.388
Nitrogen as nitrites,									•			•		-	0.253
Nitrogen as nitrates,			•			•								. —	0.353
Free ammonia,													3.778	2.763.	1.705
Albuminoid ammonia, .	•	•	•		•		•		•			•	0.212		0.078

## ANALYSIS 2.—ANALYSIS BY PEARMAIN AND MOOR. AVERAGE OF SIX SAMPLES. EXETER SEPTIC TANK.

(RESULTS IN GRAINS PER GALLON.)

	CRUDE SEWAGE.	TANK EFFLUENT.	FILTRATE
Total solids,	57.1	37.67	31.50
Mineral matter,	28.3	24.50	24.83
Loss on ignition,	28.83	13.17	6.67
Chlorin,	6.05	4.51	4.51
Oxygen absorbed in four hours,	4.21	1.41	0.32
Nitrogen as nitrites,	_	<u> </u>	
Nitrogen as nitrates,	_	i —	0.91
Saline ammonia,	4.36	2.83	1.19
Albuminoid ammonia,	0.74	0.40	0.11

the opinion that the size of the tank may be much decreased below that used in England, it being necessary to permit only enough time to insure the deposit of solid matter. At Exeter the rate at which the tank effluent was filtered was 750,000 U.S. gallons per acre per day, based on the whole area; in the Massachusetts experiments alluded to the rate was 800,000 gallons. A comparison of these rates with those obtained, both experimentally and in practice, by intermittent filtration, shows that the former are from eight to ten times as great as the latter; but on the other hand, intermittent filtration may be depended on to give in practice so high a bacterial efficiency as to leave nothing to be desired, but the reverse is true with the English bacterial methods; the latter also give at the best an efficiency of not over 80 per cent. in the removal of organic matter, as against 90 to 98 per cent. for the former. Whether the efficiencies which we aim to secure in this country are unnecessarily high is a question which lies beyond the scope of this paper, but there seems to be a growing opinion that our standard might be lowered somewhat.

One of the most recent and valuable inquiries respecting the bacterial treatment of sewage is that which was made in 1898-99 by the city of Manchester, England.\* The results obtained with their normal sewage, which is now about three per cent. industrial wastes, principally from breweries, dye- and bleach-works, as well as the results obtained with the foul sewage of Yeovil, show a success in the purification of manufacturing sewage which it was thought could not be obtained by bacterial action; it was, however, found at Manchester that when these wastes were most in evidence in the sewage the purification was lowest. Experiments at Manchester with one of the most difficult wastes likely to be met with, led to the conclusion that if the discharge from manufactories should be as great as ten per cent. of the total volume of sewage, bacterial treatment would still be successful.

The prominence given in these investigations to the open septic tank has established the very important fact that it gives results practically identical with the covered tank. A comparison of the effluents from the two, bearing out this statement, appears in the following

<sup>\*</sup> Expert's Report on Treatment of Manchester Sewage; Oct., 1899.

table, the figures being in each instance the average of twenty-four determinations. This result might have been predicted, because the sewage in the tank is in bulk, not finely divided, as in a filter, and consequently only its surface is exposed to the air, and the scum which forms on top and the cloudiness of the sewage would prevent the penetration of light.

COMPARISON OF EFFLUENTS FROM THE OPEN AND CLOSED SEPTIC TANKS. MANCHESTER EXPERIMENTAL INSTALLATION, AVERAGE OF TWENTY-FOUR DETERMINATIONS.

(Grains per Imperial Gallon, = 1 in 70,000.)

			Before. Oxygen al- sorbed in three	After. Oxygen aborded in three is
•		$\eta$	2.85	3.70
(		И.	2.85 3.02	3.70 3.7 <b>6</b>

The covered septic tank installation at Manchester is essentially like that at Exeter, already described. The only difference which it is important to note is in the filter-beds, which are all filled with clinker, graded, and arranged as follows, commencing at the bottom:

```
1 foot of clinker passing a 3-inch mesh and retained by a 1-inch mesh.
2 feet, 9 inches " \frac{3}{4}" " \frac{1}{4}
3 inches " \frac{1}{4}"
```

The following table, prepared from the diagrams accompanying the Manchester report, contains eleven weekly average determinations of the efficiency of the closed-tank installation, as given by the oxygen absorbed and by the albuminoid ammonia test. It will be seen that the efficiency for the whole series is 70 and 67 per cent, respectively. These results are about as good as those obtained by the Exeter installation, according to Analysis 1, and much inferior to those of Analysis 2.

TABLE SHOWING THE EFFICIENCY OF THE CLOSED SEPTIC TANK AT MANCHESTER, ENGLAND.

(GRAINS PER	IMPERIAL	GALLON, =	1 IN	70,000.)	)
-------------	----------	-----------	------	----------	---

OXYGEN ABSORBED IN FOUR HOURS.			ALBUMINOID AMMONIA						
Week Ending.	Raw Sewage.	Septic Tank Effluent.	Filter Effluent.	Effi- ciency.	Raw Sewage.	Septic Tank Effluent.	Filter Effluent.	Effi- ciency.	
1898.									B 2
Dec. 7	6.0	4.9	2.3	61.7	0.25	0.17	0.09	64.0	¦ ¥i ₹
" 14	5.2	4.4	1.7	67.3	0.24	0.15	0.08	65.7	daily from
" 21	6.1	5.8	2.1	65.6	0.30	0.16	0.08	79.3	No da fr
28	5.3	5.1	1.8	66.0	0.21	0.14	0.06	71.4	No L. G. P. J.
1899.					   				ept
Jan. 4	3.7	2.8	0.9	75.7	0.22	0.14	0.07	68.2	9 00 .
. 11	3.9	3.5	1.2	69 2	0.23	0.18	0.09	60.9	ns err
<b>''</b> 18	5.0	3.3	1.1	78.0	0.30	0.16	0.08	79.3	afte afte
" <b>2</b> 5	3.4	2.7	0.8	76.5	0.26	0.15	0.08	69.2	in E
Feb. 1	4.1	3.9	1.4	65.9	0.32	0.20	0.12	62.5	l cgr
·· 8	5.0	4.1	1.4	72.0	0.30	-0.22	0.14	53.3	atu a
15	5.2	4.4	1.3	75.0	0.37	0.24	0.13	64.9	Flow continuous except Saturday afternoon
Average,	4.8	4.1	1.5	70.0	0.27	0.17	0.09	67.0	

The open septic tank at Manchester consists of a large masonry tank formerly used for chemical precipitation. Across one end a partition wall was constructed, forming a small settling basin. After septic treatment in the large compartment the effluent passed in succession to two contact or filter-beds, thus receiving a double instead of a single contact, as in the covered septic tank system. (See plate II.) The piping and gates were so arranged as to permit the application of crude sewage from the by-pass, or of settled sewage from the small settling tank, after being retained therein for about one hour, or of sewage septically treated in the large, open septic tank.

From February 16th to October, 1899, this installation was in continuous use, and it is stated in the experts' report that "up to the present time (Oct., 1899) the only notable quantity of sludge which can be perceived, on dipping with a rod, is immediately beneath the intake penstock; indeed, our experiments seems to show that an enormous quantity of sludge, which would otherwise accumulate, is destroyed in this way." It was found that the products of putrefaction were here the same as in the closed tank, showing the similarity

of action of the two. The effluent from the open tank was applied to beds A and B. (see plate II.), when the system was first put in operation, but these proved to be too coarse. Two other beds, C and D, of finer material, were then used, with much better results, the former being the primary and the latter the secondary bed. These beds were three feet deep and filled with ungraded clinker as follows:

A. passed 3-inch mesh, rejected by 1-inch mesh.

B. '' 1 ''  $\frac{1}{4}$  ''

C. ''  $\frac{3}{4}$  '' ''  $\frac{1}{4}$  ''

D. "  $\frac{1}{2}$  " "  $\frac{1}{8}$  "

The volume of open septic tank effluent passing through beds C and D, or C and D in conjunction with either A or B, varied from 632,000 to 759,000 Imperial gallons per acre per day, the number of fillings of each combination of beds being from 4, to an average of  $5\frac{1}{3}$  when the last-named beds were used. With two fillings per day, the volume of sewage dealt with by the beds of the covered tank installation varied from 735,000 to 836,000 Imperial gallons per acre per day, the smaller volume being about 100,000 gallons greater than at Exeter. Referring to the open tank installation, the Manchester report states: "The result of the treatment of the open septic tank effluent on beds C and D have from the first surpassed even our most sanguine expectations. Recently it has been found possible to deal with four fillings per day, every single sample being nonputrescible and well within the limit of impurity. A large amount of nitrate nitrogen is present in every sample of the filtrate."

The test for putrescibility consisted in determining the oxygen absorbed in three minutes by the fresh filtrate, and then completely filling a glass-stoppered bottle with the same filtrate and retaining it at eighty degrees Fahr. for six or seven days, at the expiration of which period the oxygen absorbed from permanganate in three minutes was again determined. Any putrefaction would increase the oxygen absorbed, the extent of this increase being evidently a measure of the putrefaction. This determination was very important, as it was necessary to produce a filtrate which when discharged into the Manchester ship canal would not occasion a nuisance.

In the following table the efficiencies of the complete open and closed septic tank systems at Manchester are compared. These results

are for practically equal volumes of sewage per unit area of contact bed, since the beds of the open tank system, employing double contact, treated sewage at double the rate of those of the covered tank system. The superiority of the former, as established by analytical results, is very marked; quoting in this connection from the experts' report: "We would emphasize that our experiments clearly show that the key to efficiency in the bacterial treatment of sewage is multiple as opposed to single contact."


COMPARATIVE RESULTS FROM THE OPEN AND CLOSED SEPTIC TANK SYSTEMS AT MANCHESTER, ENGLAND. EXPERIMENTAL INSTALLATION.


(RESULTS EXPRESSED	IN GRAINS PED	IMPERIAL GALLOY :	- 1 av 70 000 \
INERCLIS EXPERSED	IN OKAING PER	THERRIAL GALLON,	= 1 1N (U.VUV.)

	WKEK	LY AVERAGES FOR P JULY 12 TO SEP	ERIOD PROM WERK TEMBER 13, 1899.	Ending,	
	Oxygen absorbed in four hours.	Free Ammonia.	Albuminoid Ammonia.		
DATES.  Week Ending.	Filtrate from Bed D.	trate from Reds Covored Septic Tank System.	Filtrate from Bod D.	_	
1899.		<u> </u>		_	
July 12 11 19 12 26 Aug. 2 16 123 130 Sept. 6	0.49 0.49 0.51 0.53 0.48 0.49 0.53 0.46 0.38 0.46	1.18 1.37 1.40 1.21 1.15 1.12 1.09 0.99	0.060 0.140 0.047 0.120 0.046 0.130 0.042 0.115 0.043 0.094 0.041 0.090 0.037 0.100 0.037 0.080 0.040 0.095 0.054 0.130	0.691 0.700 0.734 0.713 0.620 0.620 0.620 0.870 0.750 0.870	0.411 0.305 0.268 0.171 0.255 0.381 0.396 0.516 0.480 0.560
Average,	0.48	1.16	0.045 0.109	0.740	0.370

The advantages which the septic tank system of sewage disposal presents, some of which have been already alluded to, may be summarized as follows, comparison being made with intermittent downward filtration, irrigation, and chemical precipitation.

1. There results a very much smaller quantity of solid matter or sludge to be ultimately disposed of, and without recourse to either



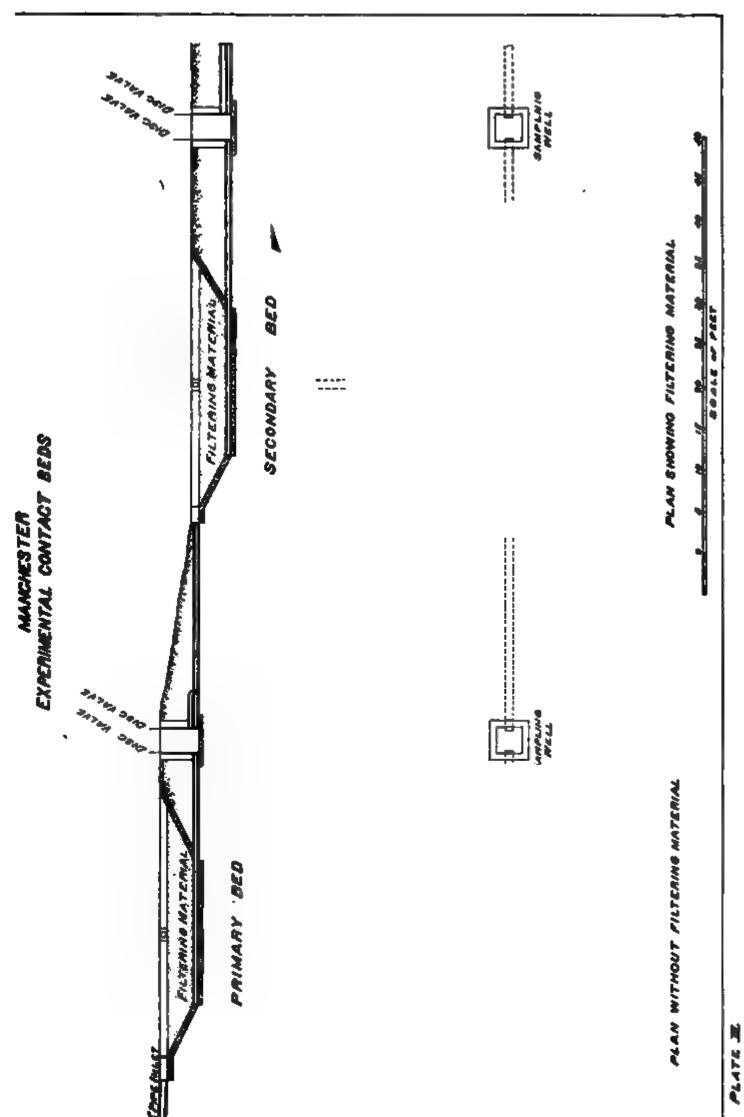

mechanical separation, other than coarse screening, or chemical treatment.

2. As the result of the liquefaction of organic solids and the use of coarse bed material, the attainment of a high rate of treatment is secured with a consequent reduction in filtering areas.

Other advantages claimed, which are not so well established, are:

- 3. The general adaptability of the system.
- 4. The smaller outlay for installation, maintenance, and operation.

These claims are all based on the results obtained by comparatively small installations, in the operation of which certain difficulties and limitations have appeared, the economic importance of which it is not easy to assign a general value to.

With respect to the volume of accumulations in the bottom of the Exeter tank, reports are conflicting, and very little importance seems to have been attached to this point in the Manchester investigations. Mr. Jas. Mansergh, in his report to the Sewerage Commission of Baltimore, states that there is a marked accumulation of solid matter in the Exeter tank, amounting in twelve months to \( \frac{1}{2} \) of its capacity, and Cameron has stated that this deposit amounts to about 20 per cent. of the suspended matter entering the tank, and is largely inorganic. The ultimate disposal of this matter would not be attended with as much difficulty as would the disposal of ordinary sludge, as it is only about \( \frac{1}{3} \) organic and not putrescible: its volume would, however, be considerable for a large installation, and the cost of removal and final disposal would depend much on local conditions. The rate at which the deposit in the septic tank accumulates varies greatly in different installations, but the cause of this variation is obscure. A more complete exclusion of grit and earthy matter, and possibly a periodic reduction in the rate of flow, will prove a partial Future investigations will doubtless deal with this question more fully.

The rate of treatment, as already stated, is very high, being from 600,000 to 1,000,000 gallons per acre per day, but the beds used have gradually decreased in capacity, and those of fine material have required occasional scraping. The filtrate, with the exception of that in the underdrains, has usually been found to be clear and odorless.

The general adaptability of this system to the purification of house sewage, neglecting for the present the question of low bac-

terial efficiency, is to be expected from results already obtained; there is, however, a sufficient element of uncertainty involved to lead municipalities to proceed tentatively, particularly where industrial wastes must be dealt with and where a large installation is required. Sewage in the United States has only from ½ to ⅓ of the strength of that which has been treated septically in England, but considering the obscurity respecting a number of important points, it would not be safe to assume that it would be proportionately easier to purify, although the most recent inquiries at Manchester, respecting the disposal of storm sewage, point to such a conclusion.

The cost of installing, maintaining, and operating this system is very largely a matter of special, rather than of general conditions. An important economic modification of the original design is the omission of the roof of the tank.

A further modification is in the reduction of the size of the tank from twenty-fours hours' capacity to possibly seven or eight hours'. The proper tank capacity will doubtless vary with different sewages, but the opinion prevails that a great reduction can be made. A very common method of disposal in England is by chemical precipitation, followed either by discharge into water or upon land, and where an abandonment of this method is found necessary or advisable, by reason of unsatisfactory results, the precipitation tanks may be used for septic tanks, for which they are well adapted both in form and structure.

An engineering feature in favor of the septic tank is that it wastes no head, the sewage entering and leaving at about the same level. This is of great importance where, as is frequently the case, the outfall sewer leading to the place of disposal is laid at a minimum grade and it is required to discharge the filtrate at the elevation of the old outfall.

#### THE BACTERIA OR CONTACT BED SYSTEM.

The bacteria or contact bed, which has been brought into prominence largely through the efforts of W. J. Dibdin, formerly Chief Chemist to the London County Council, is simply an uncovered tank containing generally a bed of either coke, clinker, or burnt clay ballast, the depth varying from 3 to 6 feet, though a depth as great

as 13 feet is being used in a small experimental bed at one of the London outfalls. Underlying the bed, open-jointed main and lateral collecting pipes are arranged on the floor of the tank. A cheap form of bed may be constructed in clayey ground by making a reservoir-shaped excavation therein and puddling the slopes if necessary. This mode of construction appears in Plate III, showing two of the experimental beds at Manchester. Some of the beds now in use in England are masonry or concrete tanks formerly used for chemical precipitation.

Contact beds are usually operated in pairs. The first or primary bed, after retaining its charge from one to two hours, discharges by gravity into a secondary bed, where the sewage is again retained for about the same length of time. This is known as double contact treatment. Where the second bed is omitted, the treatment is by single contact. The action of the beds is intermittent, but differs from ordinary intermittent downward filtration in that the bed does not simultaneously receive and discharge its contents, but holds it in a quiescent state in contact with the bed material for an hour or more, before discharging. This contact period is found necessary on account of the coarseness of the bed material, and the consequent high rate at which the sewage would pass through it if unchecked, not affording the necessary time for effective bacterial action. The filter-beds used with the septic tank, it will be seen, are ordinary contact beds.

The most recent and valuable information on the contact bed treatment of sewage is that contained in the "Experts' Report on Treatment of Manchester Sewage," Oct., 1899, and the supplementary report of the Rivers Department of Jan'y 22, 1900; also several recent reports of the London County Council.

The one-acre single contact coke bed constructed in 1894 at the Barking sewer outfall, London, was the first to show what could be accomplished, on a large scale, in the purification of sewage by this method. As the particulars respecting the design and operation of this installation have appeared in various periodicals, only a very brief statement of the same will here be made. This bed had originally a depth of 3 feet, subsequently changed to 6 feet. Fine pan breeze covered with three inches of gravel was used. The water capacity of the bed was about  $\frac{1}{3}$  of its cubic content. The 3-foot bed

received 3 daily fillings for 5 days in the week; 2 on the sixth and none on the seventh day, and was matured in 5 weeks, reaching a rate of 500,000 gallons per acre per day, with an efficiency, as determined by the oxygen absorbed and albuminoid ammonia tests, of 79.1 and 77.2 per cent. respectively; there was also an increase in the nitrates from 0.125 to 0.238 grains per gallon. At a subsequent rate of 600,000 gallons, which was maintained for 6 months, the corresponding figures are respectively 79.8, 71.5, and an increase in the nitrates from 0.022 to 0.141. At a rate of 1,000,000 gallons, the corresponding figures are respectively 77.3, 70.0, and an increase in the nitrates from 0.396 to 0.699 grains per gallon. No relation can be found between the rate and the efficiency. The high nitrate which finally appeared was doubtless derived from nitrogenous matter stored in the bed. The sewage applied to this bed had been relieved of 3 of its suspended solids by previous chemical treatment. Partially settled sewage, which had received no chemical precipitation, was dealt with as successfully as the chemical effluent. The efficiencies given above are averages from a number of determinations and those in the last groups were obtained during the winter, the bed being exposed.

Three experimental contact beds were constructed at the Crossness Outfall, London, in 1898; each had an area of  $\frac{2}{363}$  of an acre, and were designated as beds A, B, and C. The tanks containing beds Cand B had each a depth of 12 feet, but were filled with coke to a depth of 6 feet each; C had a depth of 4 feet. In all of these beds ungraded coke the size of a walnut was used. The original sewage capacity of B and C was 4500 gallons each, and of A 3000 gallons, or in each case 50 per cent. of the tank volume measure to the surface of the bed. C and B were operated as double contact beds, and A as a single contact bed. The time of filling beds varied from seven to ten minutes; the time of contact was three hours; of discharge one hour, and of aeration seven to eight hours: thus making two cycles per day. Crude sewage, which had been screened and which was free from heavy road detritus, was dealt with by bed A at the rate of 550,000 Imperial gallons per acre per day with one filling, and the deeper, double contact beds, C and B, had a rate of 832,500 gallons with one filling. These rates were reduced in ten months' operation to 370,000 and 673,400 gallons respectively, as the result of the diminished capacity of the beds principally from the storage of solid

matter. One of the deep tanks was subsequently filled with the same grade of coke to a depth of 13 feet, and in nine weeks' use the results obtained did not differ materially from those given by the shallower beds. The average monthly efficiency of this installation is given below, as well as a comparative table of totals for the whole series of observations. In the determination of oxygen absorbed by the crude sewage, the solid matter was first removed by passing it through filter-paper, as the coke beds would act similarly and it was hence not necessary to consider the solids. It will be seen that chemical treatment removed 16.9 per cent. of the organic matter in solution; single contact treatment 51.3 per cent., and double contact 69.2 per cent.

AVERAGE ANALYSES. CROSSNESS, LONDON. SMALL COKE BEDS, 1898. (Grains per Imperial Gallon = 1 in 70,000.)

		-								Impurity of Liquid.	PER CENT. PURIFICATION ON RAW SEWAGE
Raw sewage,	•		•	•	•	•		•	•	3.696	
Chemical effluent,			•				•	•	•	3.070	16.9
Coke bed effluent, single treatment,	•	•					•	•		1.799	51.3
Coke bed effluent, double treatment	,					•	•	•		1.137	69.2
River water, high tide,	•			•			•	•		0.850	<b> </b>
River water, low tide,		•								0.429	<u> </u>

Based on oxygen absorbed in four hours.

TABLE SHOWING PER CENT. PURIFICATION. SMALL COKE BEDS, CROSSNESS, LONDON. MONTHLY AVERAGES, 1898-'99.

Purification Based on Oxygen Absorbed in Four Hours.

MONTH.									SINGLE COKE BED A.	PRIMARY COKE BED C.	SECONDARY COKE BED B.					
July, 1898,		•	•	•		•		•		•	_	_		54.1	48.8	73.2
Augúst,			•		•		•	•				•	1	<b>53.1</b>	51.4	73.9
September,								•			•	•	İ	60.0	53.4	70.2
October,													İ	48.2	41.0	61.4
November,											•	•	1	<b>59.2</b>	55.9	71.2
December,			•		•	•					•	•	ì	48.8	47.0	66.1
January, 1899, .													1	46.7	46.1	66.7
February,		•	•	•	•	•	•	•	•	•	•	•	ı	45.8	43.1	67.4
A verage,	•	•	•	•	•	- <b>-</b>	•	•	•	•	•	•		51.9	48.3	68.8

## . MANCHESTER EXPERIMENTAL INSTALLATION. TABLE SHOWING PURIFICATION EFFECTED, AS MEASURED BY OXYGEN ABSORBED AND BY ALBUMINOID AMMONIA (WEEKLY AVERAGES).

Double Filtration of Both Settled and Raw Sewage.

DA: Wrek	End-	CRUDE OR SET- TLED SEW-	EFFLU- ENT FROM	EFFLU- ENT FROM	PER CENT. PURIFI-		EFFLU- ENT FROM A.	EFFLU- ENT FROM B.	PER CENT. PURIFI-	Remarks.			
13	G	AGE.	<b>A</b> .	В.	CATION.	SEWAGE.	FAUM A.	FAUA D.	CATION.				
189	8	Oxygen	absorbed	in four	hours.	Albuminoid Ammonia.							
Sept.	21,	6.42	5.00	1.67	74.0	0.333	0.230	0.117	64.9				
6.6	28,	4.50	2.85	1.05	76.7	0.398	0.227	0.117	70.6	<b>/</b>			
Oct.	5, 19	5.41 5.20	3.30 2.78	1.35 1.00	75.1 80.8	0.343 0.318	0.218 0.300	0.115 0.128	66.5	Two fill- ings daily			
4.6	12, 19,	4.70	2.50	1.15	<b>75.5</b>	0.348	0.300	0.128	68.4	of settled			
46	26,	4.81	2.60	0.85	82.3	0.290	0.153	0.068	76.6	sewage.			
Aver	age,				77.4				67.8	]			
Nov.	2,	3.60	1.65	0.75	79.2	0.208	0.108	0.048	76.9	1			
166	9,	5.00	2.75	1.08	78.4	0.278	0.168	0.098	64.8	Three			
4.6	16,	5.40	3.00	1.20	78.8	0.288	0.168	0.100	65.3	daily of settled			
Aver	age,				78.8				69.0	sewage.			
Nov.	23,	$\binom{5.80}{5.20}$	$\binom{2.80}{2.60}$	$\binom{1.00}{1.00}$	81.8	$\binom{0.388}{0.388}$	$\binom{0.238}{0.200}$	$\begin{pmatrix} 0.116 \\ 0.100 \end{pmatrix}$	68.0	\			
4.4	30,	$\binom{5.60}{4.50}$	(2.80)	$\binom{1.15}{0.82}$	80.6	$\binom{0.308}{0.168}$	$\binom{0.148}{0.100}$	$\binom{0.083}{0.068}$	68.7	Three fillings daily-the			
Dec.	7,	$\binom{6.00}{4.70}$	$\binom{2.80}{2.60}$	$\binom{1.00}{0.85}$	<b>82.</b> 8	$\binom{0.248}{0.203}$	$\binom{0.118}{0.118}$	$\binom{0.058}{0.058}$	78.7	first of crudesew-			
"	14,	$\binom{5.20}{5.85}$	$\binom{3.00}{2.35}$	(1.45)	79.6	$\binom{0.243}{0.178}$	$\binom{0.128}{0.108}$	$\binom{0.060}{0.054}$	73.0	age; the other two of settled sewage.			
Aver	age,				81.2				72.1	) so w <b>ag</b> e.			
Dec.	21,	6.10	3.05	1.08	82.3	0.293	0.143	0.07∺	73.4	<b>\</b>			
4.6	<b>28</b> ,	5.10	2.50	0.90	82.3	0.208	0.100	0.048	76.9				
189	9.	ĺ								) mb =			
Jan.	4,	3.72	1.35	0.50	86.5	0.218	0.090	0.043	80.3	Three fillings			
6.	11,		1.70	0.65	83.1	0.228	0.138	0.066	71.0	daily of			
66	18,	4.98	1,60	0.65	86.9	0.308	0.118	0.064	79.2	/ crude <b>sew-</b> / age.			
Feb.	<b>25</b> , 1	3.40 4.10	1.40 1.90	0.60 0.80	82.3 80.5	$0.263 \\ 0.328$	0.103 0.158	$\begin{array}{c} 0.063 \\ 0.078 \end{array}$	76.0 76.2				
Avera					83.4				76.1	J			
		4 0~	0.05	0.05		0.200	0.100	0.000					
Feb.	8, 15,	4.97 5.20	2.25 2.10	0.85 0.88	82.9 83.1	0.300 0 379	0.160 0.183	0.090 0.091	70.0   75.9	Four fill-			
	22,	4.80	2.60	1.03	78.5	0.308	0.158	$\begin{array}{c} \textbf{0.031} \\ \textbf{0.092} \end{array}$	70.0	ings daily			
Aven	age				81.5	<del></del>	!		71.4	sewage.			

In the Manchester investigations, beds A and B (see Plate II) were used for six months, or more, for double contact treatment. A was the primary and B the secondary bed. Both settled sewage from the small settling tank and raw, screened sewage were dealt with, as is shown by the preceding table, which gives the number of daily fillings and the efficiencies of the beds for the various conditions under which they were operated. It should be noted that the efficiency of the beds when receiving 4 fillings daily of crude sewage was higher than for 3 daily fillings of settled sewage.

Complete investigations were made at Manchester on the treatment of storm sewage, the Local Government Board requiring that a volume equal to 6 times the dry-weather flow should be dealt with, over and above that applied to the beds provided for the dryweather discharge. The degree of impurity permitted in sewage effluents by the Mersey and Irwell Joint Committee is 1 grain per gallon of oxygen absorbed in four hours, and 0.1 grain per gallon of albuminoid It was found at Manchester that when the sewage was somewhat diluted with rain this standard was met by single contact treatment, and that usually double contact gave a purification exceeding the requirements, and that a mixture of the effluent from a single contact bed with that from double treatment conformed with the required standard. These results naturally lead to the treatment of storm sewage by single contact, and at an accelerated rate. amount of oxidizable matter in the first runoff from a storm, covering a period of two hours or more, was found to be as great as that in the dry-weather sewage, and this runoff could consequently not be dealt with at the same rate as the more dilute discharge, but required a short double contact treatment. Owing to the increased rate of discharge at such times, a storage capacity equal to two hours' average storm flow was recommended. It was concluded, from experimental results, that the total runoff from Manchester could be satisfactorily treated on 25 acres of single contact beds specially constructed for the purpose, the estimated storm flow being at the rate of 601 million gallons per day. The daily dry-weather flow was placed at about half of this quantity, requiring 60 acres of double contact bed, or 500,000 gallons per acre per day. This rate was deemed too high by the Local Government Board, who were unwilling to sanction the necessary loan for construction without the area was increased 50 per

cent. and the number of daily fillings reduced from four to three; they furthermore would require the application of the effluent to land, and other modifications of the experts' recommendations. In the supplementary report it is stated that "a further large margin is afforded by the 25 acres of storm beds, which need to have at least two fillings per day put upon them in order to maintain their efficiency. It is evident that the storm beds, being less frequently in operation, will be rich in nitrates, and thus be in a specially favorable condition to deal with the storm sewage."

## THE GARFIELD COAL FILTERS.

In 1896 Mr. Joseph Garfield, Assoc. M. Inst. C. E., then manager of the Wolverhampton sewage works, made some experiments with coal as a filtering medium. The results with the sewage of Wolverhampton, which contained much chemical wastes, were so successful that several experimental filters were put in use at other places. The sewage of Litchfield, which contained a large amount of brewery waste, and which as a consequence had proved very difficult to treat by precipitation and land treatment, was successfully dealt with by these filters, giving an efficiency from 7 determinations of 78 per cent. from oxygen absorbed, and 71.2 per cent. from albuminoid ammonia.

The following, respecting these filters, is from a paper by Prof. A. Bostock Hill, presented before The Sanitary Institute at Leeds, in 1897:

"As far as is known, any kind of coal will do, but it should be as clean as possible, and if necessary, washed. The depth should not be less than 5 feet when it can be obtained. The first layer of the filter consists of 6 inches of coal, about half-inch cubes in size, over and above the effluent drain pipes. This layer is blinded with a little  $\frac{1}{2}$ -inch cube coal. Above this comes a layer of 30 inches of  $\frac{1}{8}$ -inch cube, and on top of that a 30-inch layer of  $\frac{1}{16}$ -inch cubes. The top course is a 6-inch layer of coal dust, which has passed through a  $\frac{3}{16}$ -inch mesh, the fine dust not being removed as in the other layers. The water to be purified is applied to the filters by means of gutters placed level on the surface of the filter. The rate of filtration has been up to now 1,000,000 gallons per acre per day, but it is believed that this

quantity may be increased. The whole of the coal used, except the bottom 6 inches of ½-inch cube, will pass a  $\frac{3}{16}$ -inch mesh, and is thus so fine that it is almost a waste product at the colliery. As a result of twelve months' working, it has been observed that the efficiency of the coal has increased. At first it would appear that the action, which, unlike many other mechanical filters, is considerable, is a chemical one by the coal, because the oxygen absorbed is at once directly affected. Afterward, however, nitrates are produced in considerable quantity, so that probably there is then a double action, chemical and bacteriological.

"The coal appears to have a special power of removing the putrescent organic matter from the sewage. The effluent is particularly bright, and as I have stated, shows a marked diminution in the quantity of oxygen absorbed. It is also perfectly free from odor, and thus gives evidence that the organic matter removed is that portion particularly which is in a state of putrescence. If this were not so, we should expect to find an equal degree of purification shown by the quantity of organic ammonia present, but as a matter of fact, the purification in this way nearly always appears less than by the amount of oxygen absorbed. Of course it is understood that, in dealing with sewage by filters, a preliminary precipitation of suspended matter has taken place, and the better this preliminary purification has been effected, the better the results obtained in the effluent from the filter. In working the coal filters, up to the present it has been found best to allow the filter to work for a period of twelve hours and then give it a similar period of rest. As in all other filters, this rest is absolutely essential, but I have reason to hope that the period of rest may be shortened without any detriment to the efficiency of working of the filter."

In a recent letter, Mr. Garfield states that he uses an automatic syphon which discharges every half-hour, and by means of wrought iron tubes distributes sewage evenly over the surface of filters. This intermittent action is continued day and night. He further states that these filters are operated, without holding the sewage in contact with the bed material, by closing the effluent pipe; in which respect there is a difference from the ordinary contact-bed treatment.

### SUMMARY.

The size of the beds of a contact-bed installation should depend very much on the minimum rate at which sewage reaches them. It will be recalled that in contact treatment there are four periods—filling, standing full, emptying, and aerating; since very little purification takes place during the first period, it should be short. If the bed is large relatively to the rate of flow, the sewage which first reaches it can not enter upon the quiescent contact period, nor can the bed material with which this sewage is in contact be aerated until filling is completed and the whole bed ready for aeration. If, however, this bed is subdivided into smaller beds, each may be operated independently of the others and delay would be obviated, thus increasing the total volume of sewage dealt with; furthermore, the cubic capacity of a bed receiving a uniform flow need not be as great as one which receives the same daily quantity but at a variable rate, a point to be borne in mind in considering the capacity of the installations at Sutton, Barking, Crossness, and Manchester, where the rate is uniform throughout the day, which could not be the case if the whole sewage discharge were dealt with at these places.

The bed depth which may be used is largely influenced by the coarseness and nature of the filling material as affecting the readiness with which the bed becomes aerated. At Crossness a bed filled to a depth of 13 feet with coke the size of a walnut gave in nine weeks' use an effluent not differing from that given by the 4-foot bed at the same place and filled with similar material; with beds thus increased in depth there is a proportional decrease in the area covered, which is a matter of greatest importance where land is of considerable value or where large areas can not be obtained. The cost of the tanks per unit of volume would also be decreased. The bed thickness used at Barking, Exeter, and Manchester, as well as the material with which they are filled, have been already stated.

The permanency of contact beds has been very fully investigated, particularly at Manchester, for it has been recognized that the value of this system will be small if the accumulation of sludge in the interstices of the bed can not be prevented. The water capacity of beds when first put in use varies from  $\frac{3}{10}$  to  $\frac{5}{10}$  of the cubic capacity of the tank below the bed surface, depending on the nature and size

of the filling material; the coarser having the greater volume of voids, there would hence be economy in using coarse material. The original capacity of all contact beds decreases quickly at first from the formation of the bacterial film which surrounds the pieces of bed material, and progresses more or less rapidly thereafter, depending on the quantity and nature of the solid matter reaching the beds and the method of operation. The primary beds at Sutton suffered in two years a decrease in capacity from 32 per cent. of the volume of the containing tank to 19 per cent. when dealing with crude screened sewage. The experimental beds installed at Crossness in 1898, using coke as large as a walnut, showed a similar decrease in ten months from 50 to 33 per cent., and the 13-foot coke bed at the same place, while receiving raw screened sewage, decreased in capacity at the rate of 1 per cent. of the original per week. This rate was subsequently reduced by about ½ by sedimentation, and experiments are now being made with settling-troughs in which the attempt is made to so regulate the velocity that grit and fibrous matter, which are mainly responsible for the clogging, shall be deposited, while the solid putrescible matter remains suspended and passes to the beds. The double contact beds at Manchester showed a decrease in the capacity of the primary of 47 per cent., and of the secondary of 35 per cent., after dealing with both crude and settled sewage for ten months. At Sutton, where both beds are finer, the secondary bed very nearly retained its original water capacity.

A long period of aeration does not restore contact beds to their original capacity, and in some instances has affected them very little. A microscopic examination of the deposit on the coke from the coarse beds at Barking and Crossness showed that "the surface of each piece of coke had in the course of time become covered with soft matter, and it was ascertained that this matter contained some fine coke particles and sand grains, cotton and woolen fibers, and diatoms, but consisted largely of chaff, straw, and woody fiber." \*

The original capacity of bed C of the Manchester open septic tank system was 3690 gallons. A continuous use for seventy-four days reduced it to 2000 gallons, and a continuous rest of eighteen days

<sup>\*</sup> Bacterial Treatment of Crude Sewage. Supplement to Second Report of the London County Council; London, 1899.

restored the capacity to 3320 gallons. The recuperation of this bed is in strong contrast to the permanent loss of capacity in the coarse beds at Crossness which dealt with crude sewage containing sand and fibrous matter.

Data showing the relation between the kind and grade of bed material employed in different installations, and the degree of purification effected, is often not comparable because other conditions influencing purification are at the same time variable, and the same difficulty is encountered in comparing most of the data relating to these new bacterial systems.

A series of experiments by Dibdin and Thudichum, conducted under strictly uniform conditions, gave the following percentages of purification, the impurity of the coke breeze effluent being unity:

					Coke.	Cval.	Glass.
Free ammonia,	•	•	•	•	1.00	1.55	1.75
Albuminoid ammonia,	•		•	•	1.00	1.72	2.06
Oxygen absorbed,	•		•		1.00	1.60	1.65

In the experiments with small beds at the Barking outfall in 1892, burnt clay ballast, pea ballast, coke breeze, sand, and polarites were all used. Based on the oxygen absorbed, the average purification was respectively, in percentages, 43.3, 52.3, 62.2, 46.6, and 61.6, showing again the best results from coke. In the extensive investigations since conducted at the London sewer outfalls, coke has been used to the exclusion of other materials. The two Roscoe filters of the Manchester experimental installation, one filled with coke and the other with clinkers, showed the superiority of the latter material under strictly comparable conditions.

The size of the bed material employed in England varies greatly in different installations, being influenced somewhat by the nature and quantity of the suspended matter to be treated, but quite as much by the views of the designer. The experimental beds built at Crossness in 1898 were filled with coke the size of a walnut, and became sludged up when dealing with crude screened sewage; and with bed A, at Manchester, of coarser material, the same difficulty was experienced, leading to the use of finer beds and the application thereto of the effluent from the open septic tank instead of crude sewage. With coarse beds the clogging is internal, and with the fine it is on the surface, where accumulations can be readily removed, but where, if

permitted to remain, they prevent the full aeration of the bed but assist in an even distribution of the sewage. While it may be permissible to admit into the body of a bed sewage which contains little or no sand, grit, or woody fiber, like that discharged from the separate system, the indications are that the occasional periods for recuperation thereby necessitated may in the aggregate be so long as to make it more economic to exclude as far as possible all solid matter, by a previous septic treatment, which may take place to a great extent in the sewers, if their length and the lightness of their grades sufficiently retard the delivery of their contents at the point of disposal.

The experience with coarse beds at Crossness shows most conclusively that sewage containing sand and street detritus generally will produce permanent internal clogging in coarse beds at such a rate as to render their use much too short for economy.

The general method of operating contact beds varies with different installations. It seems to be the general opinion that the filling period should be as short as possible, as already stated; what influence, if any, the rate of filling has on the amount of interstitial air absorbed by the sewage is not known, although the opinion has been ventured that by rushing the sewage on the bed a greater amount of air would be imprisoned than if slowly applied.

The standing-full or contact period usually varies from one to two hours for both the primary and secondary beds, during which time the action is largely anaerobic.

The number of daily fillings which the beds of different installations receive, varies, as has been seen, from 1 to 4.

It has been found that new contact beds must be matured by a quite limited application of sewage at first, and with a gradual increase up to their normal capacity, a process occupying several weeks. The reason for this is that the organisms which are necessary for the process of purification are derived from the applied sewage, and multiply and exercise their purifying function effectively if the amount of work imposed on them is not too great; as they multiply in the bed and receive accessions from the sewage passing through it, the bed becomes more and more active, and can thus deal with larger volumes of sewage. It has been found frequently that beds which at first refused to purify when receiving comparatively small volumes

of sewage were able to deal with from 500,000 to 1,000,000 gallons per acre per day after being properly matured; and furthermore, that mature beds suffer but little if occasionally required to treat sewage at a rate much above the normal, recuperating very quickly thereafter.

The extremely low bacterial efficiency of the so-called bacterial methods of sewage disposal has been referred to as a distinctive feature, and it is one which in its possibilities for harm demands special consideration.

From a series of examinations it appears that the crude sewage of Exeter contains, on an average, 5,450,000 bacteria per cubic centimeter, and that the filtrate obtained from this sewage contains on an average 4,600,000 bacteria per cubic centimeter, showing an efficiency of only 16 per cent. From ten examinations of the crude sewage and of the effluent from the coke beds at Crossness, the corresponding average figures were 6,140,000 and 4,437,000 respectively, the efficiency consequently being 27.7 per cent.

Considering the coarse grade of material used in these and in most of the English contact beds, and the high rate of treatment, their low bacterial efficiency might have been predicted, for it is known that the removal of these organisms, as in the filtration of water through material very much finer, is largely due to their retention in the gelatinous coating which forms on the surface of the filter-bed; and while it is true that a similar coating covers the pieces of material in a coarse contact bed, the voids are so large that much of the sewage passes through the bed without coming into intimate contact therewith.

A large number of the bacteria found in sewage are those common to normal surface waters, but a very large number is also derived from excrementitious matter. At the Crossness outfall of the London sewers an average of 10 analyses of sewage showed 100,000 B. coli communis per cubic centimeter of crude sewage, and practically the same number in the effluent from the coke beds. The spores of B. enteritidis sporogenes were found in the crude sewage in numbers varying from 10 to 1000 per cubic centimeter, and usually more than 100, and were found in the effluent in undiminished numbers. The former of these is a very common organism of human fecal matter, and the latter is derived from the same source and is considered to be the cause of diarrhea. In the sporadic or resting state, bacteria are

far more resistant to adverse conditions than when in the growing or vegetative state, into which such as form spores pass when conditions are favorable to growth; hence if the spores of B. enteritidis should find their way into the stomach through drinking-water they would probably germinate and produce diarrhea.

The true significance of these investigations is that they lead fairly to the assumption that if the nonpathogenic intestinal organisms pass through in the filtrate in practically undiminished numbers, we may expect that at times the pathogenic organisms which are associated with them in enteric diseases, such as typhoid fever, will also pass through the beds.

B. enteritidis sporogenes, while not classed as a pathogenic germ, usually causes death in guinea-pigs in twenty-four hours from subcutaneous injections. This organism was found in large numbers in London crude sewage.

A series of examinations of the coke in the beds at Crossness showed the constant presence of an organism which in its staining reaction resembled the tubercle bacillus, and which could not be morphologically distinguished therefrom. "In one instance a guinea-pig inoculated with the deposit accumulating on the coke of a bacteria bed died, and presented on examination the appearance of death from tubercle infection; and sections of its organs, when appropriately stained, showed the presence of numerous tubercle bacilli.\* The difficulty of forming any general opinion with regard to the pathogenicity of the effluents from contact beds will become evident in comparing the results of the following experiments with the foregoing statements. Quoting from Dr. Rideal's Cantor lectures: "With regard to typhoid fever, Laws and Andrews some years ago showed that some liquefying organisms have a germicidal effect on typhoid bacilli, so that their sojourn in a septic tank, or their arrest in an anaerobic upward-flow filter with such organisms, diminishes instead Dr. Packard, of Exeter, has of increases their chance of survival. proved this fact again experimentally by introducing an emulsion of typhoid bacilli into a septic tank, when he found that, instead of increasing, they rapidly diminished until, after fourteen days, less

<sup>\*</sup> Bacteriological Treatment of Crude Sewage (supplement to Second Report to the London County Council, by Dr. Clowes and Dr. Houston); Oct. 26, 1899.

than 1 per cent. of the number introduced were surviving. The same investigator also proved that the filtration was also efficient in removing typhoid bacilli, as he found that filtration as conducted at Exeter removed about 90 per cent. of typhoid bacilli from sewage inoculated with this organism.

"Before this evidence of the comparatively innocuous character of the filtrates from bacterial systems was available, I pointed out that subsequent chemical treatment could be used for sterilizing the filtrate if necessary. . . . I found that, on adding (to a filtrate) 1.77 parts available chlorin per 100,000, although about half the amount immediately combines with any organic matter present, if the aerating filter has not worked efficiently, the micro-organisms by contact with the remainder are gradually killed, so that plate cultivations of such sewage taken after fourteen minutes showed no growth with three and a half days' incubation."

It is known that if the organic matter of sewage is entirely removed the bacteria contained therein will die from starvation, but where from 15 to 20 per cent. of this matter remains it is a question if there is not sufficient pabulum to support the life of a large number of these micro-organisms; nor can complete reliance be placed on the crowding out of pathogenic germs by the more hardy species, as has been observed experimentally in the laboratory.

Where the body of water which receives the effluent from bacterial treatment can not be used for a domestic supply, as at London and Manchester, there seems to be no reason for apprehending that such effluent will be a source of danger; but where the discharge is into water which is used for domestic purposes, this apprehension will probably be felt until experience shall have found it to be groundless, even though the water is filtered.

## DISCUSSION.

Henry Leffmann.—It is not necessary to call attention to the importance of the topic which has been presented to us, nor need we wonder that it is from England that we get information of a scientific system of sewage disposal. Probably no other country has given so much attention to the questions involved in the examination and protection of water-supply. This is largely because the area is well-populated, the streams are small, the industries numerous and varied, and the people fully alive to their rights.

The subject has been so clearly and comprehensively presented in the paper

that but little is left to say in the way of discussion. A question that will suggest itself to those present is as to the applicability of these methods to American cities. Inquiry will show that several conditions exist in this country which will be serious obstacles to the instalment of extended systems of sewage disposal. One of these is the high dilution of the sewage. American cities use water wastefully, and produce a much larger volume of sewage in proportion to population than European cities. This is, however, an old story and need not be further discussed.

The conflicting jurisdiction arising from the existence of a number of independent States is a serious interference with any broad reform in the protection of water-courses. Our own locality is an excellent case in point. If Philadelphia should decide to take water from the Delaware River, it will be advisable to have means to prevent pollution of the stream for many miles above the intake. Yet, without an act of Congress, no restraint could be exercised upon New Jersey communities. Similarly, Philadelphia could, and probably would, disregard any appeal from communities in either lower New Jersey or Delaware.

The main sanitary defect of the systems in question is, as Mr. Easby has pointed out, the low bacterial efficiency. It is true that, in many cases, the ordinary microbes, especially those directly concerned in putrefactive processes, are inimical to the specific or pathogenetic forms, and may in concentrated mass exterminate the latter, yet this function can not be expected to be applicable when the mass is diffused in a large volume of nearly pure water, as occurs when imperfectly purified sewage is discharged into a running stream. Hence we must agree with Mr. Easby that the results of the so-called septic methods indicate that while a very foul sewage may at no great cost be rendered inoffensive, the effluent may not be fit for addition to a stream which may be subsequently used as a source of drinking-water.

The methods of analysis used by the English chemists are not free from objection. It is not, however, appropriate to discuss this matter here at any length. I desire to say that I regard the method in which potassium permanganate is used for four hours at a moderate temperature as of little value as a guide to determining either the potability of a water or the extent of its purification. It is much to be regretted that data were not obtained by the use of the permanganate in acid solution at the boiling temperature, in accordance with the standard methods in vogue among the American and German chemists, and that determinations of the total unoxidized nitrogen were not made by the Kjeldahl method.

P. A. MAIGNEN.—I had the pleasure of seeing Mr. Alvord's sewage plant near Chicago last year, and I was very much struck with the fact that the liquid, coming out of the covered septic tank, was nearly clear; the paper and all solid matter had been practically decomposed. On lifting the plate that covers an opening in the roof of the septic tank, a blue seum nearly a foot thick is to be seen on the surface; when broken, this seum emits very strong gas. I understand that there is a comparatively small mineral deposit at the bottom of the tank.

At first Mr. Alvord had some trouble in directing the currents of the liquid

through the septic tank, so as to make it remain a long time therein. Water going from one point to another does so very much like a billiard ball. Unless its flow is checked, it goes direct from the point of inlet to the point of outlet, without mingling with the surrounding liquid. This, I understand, has been corrected.

After leaving the septic tank the clarified sewage goes into a coke filter, made up of lumps two or three inches thick. Mr. Alvord thinks they ought not to be more than one inch thick.

The coke filter was covered at first, as it was feared the odors would create a nuisance. This fear having proved groundless, the roof has been taken away, so that the coke filters are entirely exposed to the air. They are in two compartments, and are alternately filled and emptied, with a period of dryness between. An automatic valve turns the liquid into one or the other compartment, as required.

The sewage, first clarified by the septic tank, and further oxidized by the cokefilters, is still objectionable, and experiments made with sand filters as a third operation have not proved satisfactory. The effluent becomes black and noxious; something better than a sand filter is wanted to complete the process of sewage purification.

I should like to know in what form Mr. Easby would recommend the use of chlorin, and also if he has any data as to what has become of the so-called A.B.C. process which was used on a somewhat large scale in England some years ago. In London, some ten or twelve years ago, sodium permanganate and sulphuric acid were tried. Later on lime and iron have been used.

The solution of the problem seems to be in the use of the septic tank, coke filters, and chemical treatment, the latter having comparatively little to do, because the greater part of the work will have been done by the first two operations.

Mr. Easby.—Chemicals are disadvantageous in the first steps of sewage purification for they act as antiseptics, but in the final stages they may be used.

THE CHAIRMAN (L. Y. SCHERMERHORN).—Is any effort made to intercept the matter before it reaches the treating tanks?

Mr. Easby.—Yes; in the septic tank the effort is made where the influent pipe enters. It is there that the street detritus is principally trapped. Some of it, unfortunately, passes on. It is this material which is very largely responsible for the permanent loss of capacity in all of these beds, because, of course, it can not be treated bacterially: it is inorganic matter. The septic tank, besides permitting some of this inorganic matter to pass through, also permits quite a large percentage of the organic matter to pass on to the beds, but in a very finely divided state, and the latter has lost much of its objectionable qualities. The fibrous material, which is mineralized very slowly, and the mineral matter—sand and grit—are together responsible for the permanent loss of capacity. There is a temporary loss of capacity due to the storage of organic matter, but this will yield to bacterial treatment if the bed is aerated for seven or eight days or longer. To throw a bed out of use that long simply means so much increase in the acreage.

THE CHAIRMAN.—My reference to the suspended earthy material which might

be discharged with the sewage was prompted by my knowledge of the fact that the city of Philadelphia expends a considerable sum of money annually to remove material from the docks. The amount removed is evidently small in proportion to that discharged, and I should say that four or five hundred thousand cubic yards would not be an extravagant estimate of the amount of earthy matter which is brought annually into the Schuylkill and Delaware rivers, the recipients of the sewage of the city of Philadelphia. That would be over a thousand cubic yards per day.

MR. EASBY.—In the main receptacle of the septic tank the accumulation in the bottom is about one-third organic and two-thirds inorganic. It is probable that not a little of this matter is sand and street detritus.

MR. MAIGNEN.—It is well to note that the septic tanks have not been applied to sewage diluted as that of Philadelphia. We shall soon have some data on the use of chlorin. I understand that the War Department has applied this process on a large scale in Havana, and that an official test has lately been made of the plant. No doubt the results will be published before very long, so that we will be able to form an opinion on this system.

## [ABSTRACT]

# MODERN METHODS OF MANUFACTURING GAS; WITH A DESCRIPTION OF ITS DISTRIBUTION UNDER HIGH PRESSURE.

#### FREDERICK H. SHELTON.

Read May 5, 1900.

BEFORE taking up the descriptive portion of the subject, it may be well to distinguish between the various gases that are commercially used, as many are apt to think that gas is gas, and that there is but one kind. We all know of natural gas-distributed in the West rather than in the East, and obviously not a manufactured product. We are also familiar with "producer gas," cheaply made and impossible to distribute to any considerable distance; used almost entirely in iron and steel manufacture and industries of that nature. not that kind to which I have reference to-night; nor is it any of the special gases, such as the high-candle-power pure oil-gas, particularly adapted to fields involving very high compression, as when a large quantity of illuminating value stored in a very small receptacle is desired—for car lighting, for instance; nor am I referring to "fuel gases" of various kinds, sometimes nothing more than, literally, "greased air"—air charged with naphtha or benzin. I shall refer strictly and wholly to that gas which is known as illuminating gas, and which is distributed in all of our principal cities—in fact, in practically every city in the country of a population of 5000 or over.

The manufacture of illuminating gas is a little over a hundred years old. William Murdock, in 1792, in England, was the first one to serve his house and some of his neighbors with such gas, and he is known as the "father of gas lighting." Since his time innumerable methods of making and supplying illuminating gas have been suggested and more or less agitated. I presume that no other industrial art has had more worthless patents brought out.

Oil, for instance, is very volatile. A tea-pot containing a little oil put on a stove will apparently make "gas," and this easy vaporization

and therefore apparently easy way of making gas has resulted in more broken hearts and broken pocket-books, and disappointments over exploded "processes," than in almost any other field of work. The patent office record is full of worthless processes, of which but few have got a foothold commercially. The almost universal method of making gas, from the beginning and until comparatively recently, has been that which we all know as "the coal-gas process." William Murdock used it; and some of the largest additions to gas plants to-day are upon this line. It consists, in brief, of the distillation of bituminous coal—soft coal. In the manufacture of coal-gas, as distinguished from water-gas (of which I will speak later), there are several steps which, while not all exactly distinct processess, are sufficiently so to make each a particular feature.

The disadvantages of the coal-gas process are chiefly these: The cost of labor, a high repair account, and that there is practically no elasticity in the operation. The ovens will turn out about so much gas right along each twenty-four hours. One can not speed them up for heavy demands, and when a series of dark days sets in, and the demand is increased fifty per cent., there is no easy or economical method of meeting it. The system is weak in that respect. Other defects are that coal-gas takes a great amount of space for buildings; the investment is large. Furthermore, the quality of gas made by it is limited to about 18 or 20 candles. In all of these points the watergas system is superior, and the realization of it has caused it to replace the coal-gas system to such extent that to-day the former is used for two-thirds of the gas made in this country.

The making of water-gas is based upon the theory, and the interesting scheme, of producing by composition (making artificially, so to speak) a product similar to that obtained from soft coal; in other words, the making of hydrocarbons. If there be found a cheap source of hydrogen and another cheap source of carbon, and a good way of extracting these and of mixing permanently and in the right proportions, the result will be the same thing as that secured by distillation of soft coal. The water-gas process does that. Steam is the base, and steam is water, hence the name of "water-gas." The steam contains the hydrogen, it being one of the elements of the water. Thus we have in water—i. e., steam—easily procurable, a supply of hydrogen, if we can get it away from the oxygen. In petroleum, or

liquid hydrocarbon, we have an available supply of hydrocarbon. The principle upon which the making of water-gas is based was known a hundred years ago—that is, the fact that steam, in the presence of incandescent carbon, will decompose. The question, however, of how to separate the steam into oxygen and hydrogen, on any large scale, was practically a very difficult one, finally solved by the use of incandescent carbon in the form of coal. For half a century inventors tried to make gas by using steam, recognizing the weaknesses of coal-gas manufacture. From 1800 to 1860 probably 60 patents were taken out. None of them, however, covered practical methods. Along in the 60's a little more success was attained. Steam was turned into existing retorts of coal-gas benches, red-hot coke was used for the carbon, with more or less oil, and some water-gas was secured. This still had the slowness of the retort process, and most of the difficulties, practically, of making coalgas; it was only a half-way method of making water-gas. It was not until 1872 that the first patent was taken out for the form of water-gas process that has revolutionized the business. This was by Prof. T. S. C. Lowe, who is known as "the father of water-gas." He was an aeronaut in the army during the Civil War. After the war he continued to study the manufacture of gases. He conceived the scheme of having a "generator," so-called, resembling a large vertical boiler, consisting of a fire-brick-lined shell, and containing a bed of anthracite coal, which was first "blown up" by a forced draft to an incandescent state. Into this he then turned the steam, with the result that the steam in passing through the fire-bed became decomposed and hydrogen was set free. He took out a patent for this process in 1872, and another in 1875, and, as I have said, he evolved the right combination, as compared with the earlier plans, which were failures, for water-gas made on his plan to-day includes two-thirds of the illuminating gas made in this country. As it is a matter of considerable importance and vital to gas interests in these days, it is worth taking just a moment or two to describe the apparatus.

A vertical generator shell is provided with charging-door at the top and grate at the bottom, with a hopper for the taking out of ashes; this shell is lined with fire-brick, and is connected by a cast-iron, goose-neck connection to a second shell standing in the rear also lined with fire-brick, and has an outlet at the top to the stack. It

is filled with checker brick, ordinary 4 x 9 inches fire-brick, stacked up "dry" at right angles from top to bottom. The two vessels cover all the fundamental apparatus necessary for the manufacture of water-gas. The generator or first vessel is filled full of carbonthat is, anthracite or coke, which is blown up to a white heat (taking about ten minutes in regular operation) by an air blast which enters at the bottom. The products of combustion pass out through the connecting pipe into the second vessel (the charging-door being closed), and, entering at the base, are therein burned (the products being carbon monoxid and nitrogen chiefly) by the admission of a second air-supply, with the result of heating the fire-brick stacked up in the second vessel. When hot enough, the air blast is shut off, the top or stack outlet is closed, and steam is turned in the base of the generator and passes up through the white-hot carbon or coal, with the result that two reactions take place. First, the steam is converted into hydrogen and carbon dioxid, and immediately a second reaction follows—the carbon dioxid turning into carbon monoxid. The resulting products are hydrogen and carbonic monoxid. Of course, putting two elements in the steam at the base, hydrogen and oxygen, and taking out the hydrogen at the top, we also have to account for the oxygen. The oxygen comes through in the form of carbon monoxid, the oxygen of the steam having united with the carbon of the These two gases, carbon monoxid and hydrogen, burn with a blue flame but practically have no lighting power. They, however, give us the combustible vehicle that we need. At some convenient point, frequently on top of the generator, the vapors of oil are added. That is where the hydrocarbons are put in. Petroleum, gas oil, crude oil almost in any form that can be vaporized, is simply injected into the apparatus and immediately vaporizes in the intense heat. The oil does not burn for the reason that there is no air for combustion, the vessel being entirely sealed. The oil vapors, the hydrogen, and the carbon monoxid pass over together into the second chamber. The object of this second vessel is to serve as a mixing and fixing chamber for the crude gas. It was found very quickly that if the gas loaded with oil vapors was put out into the distributing system unfixed or in indifferent shape it would be resolved into its constituents, the oil condensing in the mains, leaving very little illuminating power to the It was necessary to devise means to prevent the constituents

giving trouble by separation in the later steps of distribution. It was found that the simple process of passing these mixed gases through red-hot fire-brick made them so fixed that when they left the machine they had practically no tendency to separate. It is of interest to note that the vessel located back of the generator and serving to fix the product without additional expense is fired by the otherwise waste heat resulting from blowing up the generator and getting it hot. The heat from the first vessel is diverted to and heats the second vessel without the addition of a pound of coal to the original fuel bill.

Such is the original form of apparatus as made by Professor Lowe. It was found that the single second vessel, or superheater (so-called, I think, for the reason that the arrangement of the fire-brick was an imitation of, or an appropriation of, the superheater used in the Siemen's furnace in steel works-at any rate, that name became attached to it and has clung to it ever since—was insufficient, and a second one is now inserted between the two original vessels, serving as the connecting link, replacing the goose-neck, and practically doubling the capacity of the checker-brick and the fixing element of manufacture. The temperature of the brick in the first superheater is much more uniform than the varying temperature of the coal-bed. The blast and the introduction of the steam makes considerable range in the latter's temperature, and it is desirable to introduce the oil into a temperature fairly uniform as far as possible; so that now, for that reason, the oil is almost invariably put into the middle vessel. One can get a good idea of the water-gas process if one will simply conceive for a moment an old iron stove, almost white hot, a stove such as one sometimes see while belated in a country railroad station. one of these stoves should be arranged so that it would not leak, and we would simply inject a small amount of steam under the grate, up through the coal or carbon, that steam would turn into pure water-If then a little oil should be inserted into the stove through the top, crude illuminating water-gas would come out of the stack into the chimney.

It is somewhat interesting to bear in mind by us as Philadelphians that the relative perfection of the modern water-gas process has been accomplished by the United Gas Improvement Company of this city. Fifteen or more years ago this company realized that the water-gas process was the coming process, and acquired the patents, and com-

menced the construction business. From that time it has steadily filled the country with water-gas apparatus, the recognized standard machinery of its class, as standard as the Hoe printing press, the Corliss engine, the Winchester rifle, and any such apparatus predominating in its line. It may further be of interest to know that the original water-gas plant was built at Phœnixville, Pa., in 1872, and that by the course of events at this time I happen to be a part owner of that plant, and that the Phœnixville plant has become the starting-point of another innovation in the gas business, which, while by no means as radical as the water-gas process, is, nevertheless, I believe, going to be a most distinct addition to and innovation in the general production, distribution, and economy of gas manufacture.

Whether one makes coal-gas or water-gas, however, is a matter of local conditions. In either case, after the gas is made the succeeding steps are comparatively uniform and well-determined, and almost the same in every gas-works in this country.

The distribution of gas for years and years has been, as a whole, upon the basis of an extremely low pressure. It seems strange that gas should be sent out at only  $\frac{1}{10}$  of one pound of steam pressure, and yet that is probably the pressure at which the great majority of gas companies deliver their product. Steam is handled on the public streets of some cities at 100, 200, and 300 pounds pressure. Water is distributed at 100 and 200 pounds pressure. Ammonia, oil, compressed air, and a great many fluids are handled in public places, at, for instance, 200 pounds pressure. We sit over a tank of Pintsch gas at 200 pounds pressure in railroad cars and do not have accidents. Every fluid, practically, excepting artificial gas, is delivered within a range of many pounds. Natural gas is delivered across country and in streets of cities at several pounds pressure. exceedingly strange that tradition, and habit, and the fact that our grandfathers did it, have up to this date kept gas distribution at such a really strangely low pressure. It is often being pushed out five and more miles away from the works at but  $\frac{1}{2}$  or  $\frac{1}{2}$  of one pound pressure. Of course, the direct result is the necessity of using large-sized pipes to carry the volume of gas and deliver it. Some little time ago I fell into the train of thought of wondering why one could not distribute artificial gas just as well as natural gas under some pounds pressure, and I finally became well satisfied that there was no reason

why one could not use pressure instead of diameter for getting the product to consumers. The Pintsch people use illuminating gas under pressure, and have done so for many years. Some six months or more ago I was so situated at Phœnixville that I desired to send gas to Royersford and Spring City, five miles above. I figured that it could be done very easily, readily, and satisfactorily by pressure, and it resulted in my laying a 3-inch pipe line from Phænixville to the town named, putting in a compressor and pumping the gas in that The line was started in October, and finished on December From that time until now it has been working satisfactorily, with neither trouble nor the suggestion of trouble. It was claimed by skeptical friends that the machinery would break down, and that the pressure-reducing regulators would not work, and that the candlepower in the gas would be reduced; that the illuminants would be precipitated, and the flame would be so impoverished that there would be great loss of light. I felt that, with only a moderate degree of compression, there would be, practically, no loss of candle-power at the end of the line; and that as every mine in the country to-day, practically, has an air compressor or compressing machinery of the modern type, and of such a nature that it is not liable to be broken down, that there was no risk involved in using that machinery any more than in using a steam engine. The regulating mechanism at the far end of the line is an appropriation of the mechanism used in natural gas distribution by which gas has been sent for many years across the country under pressure, and in which proper and reliable regulators are needed at the terminals and in the houses of the customers. I put in an 8 x 12-inch compressing pump, a 3-inch pipe line, made some few provisions against possible accidents, started the line up, and it has not ceased to operate from that day to this. It is serving a town five miles away from the base, and has been doing it for some months-doing just exactly what has been done with natural gas for years, and the system has evinced not the slightest likelihood of trouble, no tendency to break down, and no trouble with the lighting I feel that with the successful operation for four months, I have practically proved that gas can be compressed, pumped, and delivered at a distance under some pounds pressure perfectly satisfactorily. The result is that the investment required in such matters is about one-half to one-third of that otherwise necessary. It enables

consolidation, and reduction of expenses. It is particularly applicable to new companies which are about to cover scattered districts. Gas companies are not like electrical companies. It costs much more to run a pipe than it does to run a wire. Expense in delivering gas around a large city is very heavy. So satisfied am I that highpressure gas-distribution will continually work, and satisfactorily, that certain associates and myself think of putting in a third line of that nature (we are building a second already in New Jersey), which will have upward of thirty miles of pipe. The gas will be conducted the same as natural gas, to every household. A regulator will be put in every cellar, the high tension cut down, and the gas pass through the ordinary meters. We will use 6-inch pipes instead of 16-inch, and make just that much saving. The only point to be considered is the question of safety. We can not afford to let high-pressure gas get past the meter in a cellar. With that point covered, however, the mechanism is perfectly satisfactory. That point can be covered by a most simple device—a seal or a return bend of pipe leading into the atmosphere from the basement or cellar filled with oil that will not If for any reason the regulator goes wrong, or the high pressure gets by the regulator, it blows the oil out of the seal and immediately vents itself into the atmosphere, and does not reach the consumer's premises. Such being the case, it seems to me the last objection is removed to gas under high pressure.

#### DISCUSSION.

Engineering Works of this city built and erected for the Louisville Gas Company, at the works in the northern end of that city, a compressor 32 inches in diameter and 48-inch stroke, driven by an extended piston-rod of a 20-inch and 48-inch Corliss engine, R. P. M. 60. This compressor was to transfer to a holder in the southern end of the city the gas heretofore manufactured at and distributed from that point. The main was 10 inches internal diameter, 2.2 miles long. The piston-displacement of this compressor was about 153,000 cubic feet per hour, and two to three hours' service per day was sufficient for the requirements at the time of this installation, whereas the actual gas delivered was but 143,000 cubic feet measured by the supplying holder, the loss being accounted for by the inefficiency of the suction main and the compressor. The exact measure of the gas being known from careful observation of the fall of the holders, the resistance of the 2.2 miles of the 10-inch main connecting the two holders could be accurately determined. That it nearly agreed with observations made in the

patural gas fields of Ohio and Indiana, corrected by the specific gravities of each gas, is a valuable datum for future engineering purposes. Taking the initial and erminal pressures and the coefficient of friction observed in the natural gas ields, this 10-inch main, if straight, should have discharged 140,000 cubic feet, whereas it actually did deliver 143,000. The observations in the natural gas field were taken from pipes under various initial and terminal pressures and diameters, and up to fifty miles in length, and that the coefficient of friction applying to such luty should apply to the light duty at Louisville is good confirmation of its correctness. This method of calculating resistance is applicable to the transmission of compressed air under high and low pressures, and for long distances.

W. Forstall.—I have not very much to say, but would like to touch on a point or two where Mr. Shelton may have given the impression that there was only one side to the subject. He advocated cement joints as superior to lead Certainly a line if well laid with cement joints will be tighter than where ead is used, and as the cement joint is even stronger than the rest of the pipe, my strain on the line is apt to cause a break in the iron itself, and therefore one ig leak instead of a number of small ones at the joints, as is usually the case where lead is used. In our Philadelphia practice, we are afraid of the consequences that might ensue from the one big leak in the crowded business or esidence districts, where the various electrical conduits offer ready means for explosive mixtures of gas and air, and therefore we use lead everywhere except n the suburbs, portions of Manayunk, Germantown, and West Philadelphia. Here we prefer cement, because of its cheapness and less liability to leak, and in ase of a break the escaping gas soon makes its way to the surface, there being no conduits to spread it underground. We do not, as is sometimes the practice elsewhere, put in an occasional lead joint among the cement ones to allow for expansion.

Mr. Shelton has expressed surprise that gas should be distributed at so much less pressure than water or steam. I should say the answer is, that in considering the size of any conduit to be laid under the conditions that now obtain in city streets, if cast-iron is taken there is a certain minimum size that must be used, because of strength requirements against external strains, without reference to capacity. This size we consider should be four inches or even six inches, where conditions are very severe. These sizes enable sufficient gas to be distributed for city needs at very low pressure, whereas this is not the case with water or steam. The objections, from our standpoint, to following Mr. Shelton's advice to use wrought-iron pipe at high pressure, are, that under city conditions, where services are very numerous, the cost of special service connections and of house governors would be more than the amount saved in pipe—on service mains, at east, and that, taking systems of distributing mains as they are at present, the cost of changing over would be out of all proportion to the advantages gained, specially as the life of wrought-iron underground is a question of some doubt.

Where Mr. Shelton has used wrought-iron pipe under high pressure seems a very promising field, and undoubtedly others will follow his lead where similar onditions obtain.

When Mr. Shelton is in a position to measure by bar photometers the candlepower of his gas before and after compression we shall have exact knowledge of what loss it suffers.

THE PRESIDENT.—Some months ago the first reference to this new system came to my attention in an article in which the possibilities for improvement by other means were referred to— $c.\ g.$  the substitution of terra cotta for cast-iron pipes, without departing from the present low pressures. I would like to hear Mr. Shelton's views of this scheme.

Mr. Shelton.—Without rendering any account of the actual use of terra cotta pipe, I may say that one of the gas associations, about a year ago (when the price of cast-iron pipe was making our hands go up in the air), suggested the use of a terra cotta pipe with cement joints, as made with cast-iron pipe. would, undoubtedly, be a strong, lasting, and cheap gas conductor, but no one as yet has seemed to have the courage to undertake the actual use of it. cotta pipe is very strong, being usually almost an inch thick, and often requires a sledge hammer to crack it; as far as strength is concerned, generally speaking, it would be ample. Personally, I would be inclined to be mistrustful of its spanning strength if long mains of it were exposed—by parallel sewer excavations, for example. I should be inclined to think it would be "brittle," and that having so many joints would give trouble. I would like to comment, to a small extent, on the thoughts of my good friend, Mr. Forstall. I believe the time will come when high pressure will be used in our most crowded streets, although, of course, I do not expect that to be accepted now; I think Mr. Forstall well reflects the traditions and the reasons why it is not yet so used. The question of making the joints of service connections is not giving the slightest difficulty. The wrought-iron pipe is thin, it is true, but by the use of a saddle one gets just as much strength as is wished. Natural-gas engineers, of the better class, doing that work, use saddles right along, and do not have the slightest uncertainty in making tight service connections. In regard to the use of wrought-iron pipes at large. I may say that within a week, on the recent trip that compelled making this an extemporaneous address, and not a carefully written article, the chief engineer of the Pitt-burg Consolidated Companies told me he would never lay another foot of cast-iron pipe in the streets of Pittsburg for natural gas. had laid wrought-iron pipes years ago, and to his surprise and gratification they are lasting far better, even in bad ground, in Pittsburg than expected. pipes have been there now from ten to fifteen years, and have not begun to give out, and are not within reach of doing so. I believe such evidence as that, under such conditions, given by a man qualified to speak, is a very strong indorsement of the use of wrought-iron pipe in the manner noted. Of course, installation expense is increased by reason of the regulator necessary to put in the house, but But by the use of twenty pounds pressure instead of that is only perhaps \$3. one-half pound or less, one can get from ten to fifteen times the capacity with the present mains, and that increased capacity far overbalances and predominates, in my judgment.

1. Y. Schermerhorn.—How much gas can you send in one hour through a 3-inch pipe under twenty pounds pressure?

Mr. Shelton.—At Phœnixville we deliver about 4000 to 5000 feet an hour.

Mr. Schermerhorn.—What would be the maximum?

Mr. Shelton.—One hundred thousand feet per day, with the compressor running at 75 per cent. of its speed.

Francis Schumann.—What would the loss be?

Mr. Shelton.—Practically none at all. I would like to ask at what pressure the gas in Louisville was delivered, from one end of the town to the other? I have tried very hard to find some precedent for pumping gas at high pressure. I did not know of the Louisville instance.

MR. GORDON.—It started at about five and one-half pounds, and was delivered at almost atmospheric pressure, or, rather, ordinary gas-holder pressure. They used a piston compressor with double stroke. The compressor cylinder was 32 inches in diameter, 48-inch stroke. It has been used now for four years, as far as I know. It is quite a large installation. A Corliss engine, 20 inches in diameter, drove the compressor tandem to it at 60 R. P. M. The purpose was to stop the use of the lower works and concentrate all the manufacturing at the northern works, and deliver gas to the other end for distribution from the Portland holder.

Mr. Shelton.—We must have pressure, and it is the very crowded condition of the city streets that will bring us to pressure and enable and compel us to use a six-inch pipe instead of the twenty-inch of to-day, that is delivering gas under only the ordinary pressures of one-tenth of one pound to one-fourth of one pound. Nearly every other commercial fluid is being distributed at from 200 to 500 pounds pressure, and wrought-iron pipes are used. The fittings last, and the appliances last and are standardized. They are sufficiently developed. It is done with other fluids; it is done with natural gas; why can not it be done with illuminating gas just as well? I can not get away from thinking that it is chiefly tradition that is keeping illuminating gas companies to-day to this very low pressure—against their own interests when considered from the standpoint of the very heavy investment they are using and think necessary to use. A 6-inch pipe will do the work of a Gas loses in quality practically nothing by moderate 16- or 20-inch pipe. compression, and there are no especial mechanical difficulties. The plan is working perfectly satisfactorily at Phœnixville, and there is not the suggestion of trouble. If it will run four months it will run four years; if it will run four years, it will run forty years; if from one town to another, it will run from one county to another. I have never been so convinced in any new line of thought as in this, that the results will be exactly in practice what they figure to be in theory.

Mr. Schermerhorn.—I note that Mr. Shelton states that under a pressure of twenty pounds per square inch, about 5000 cubic feet of gas per hour were discharged through the 3-inch pipe referred to. This would be equal to 1.4 cubic feet per second, which, divided by the cross-section of the 3-inch pipe, would give a velocity of gas through the pipe of about twenty-eight feet per second; or at the rate of nearly twenty miles per hour.

Mr. Gordon.—What was the terminal pressure of the gas?

MR. SHELTON.—Ten per cent. less, with a range of fifteen pounds starting pressure; about two pounds less pressure at the far end. We had instantaneous communication by telephone at each end of the line. With twenty pounds pressure at the start we get seventeen to eighteen pounds pressure at the far end. We can tell by the eye the quality of the gas. Upon looking at the same gas at each end one can not tell the difference or observe any loss of illuminating power. It is sufficient for all commercial purposes. Just as many dollars will be taken in in the course of a week with the quality at the far end as at the starting point.

Mr. Schermerhorn.—Was any special joint used other than the ordinary joint which belongs with wrought-iron pipe of that size?

MR. SHELTON.—We used what is known as "line pipe," used in the oil country for transporting oil. It has double taper sockets instead of the ordinary, and a rather fine thread. Doubtless some of those present know exactly what it is. It is a little better than the ordinary pipe.

THE PRESIDENT.—Have not accurate determinations been made as to the loss of candle-power at increased pressures? The matter seems to be such an important one that I should think it is well determined.

Mr. Shelton.—It may be. I think the Pintsch companies have quite clearly shown the loss in candle-power. Pintsch companies, operating so many stations for serving railroad cars, usually put in their plants for making oil gas, because they have to have a great amount of illuminant in a very small compass to run cars from forty-eight to sixty hours. Oil gas, being so rich, is particularly good for that purpose, and is usually used. In addition to that, they have found that oil gas stands compression better than any other gas, but there are places where they have not seen fit to put in their own works, and have used city gas and compressed it; and when they compress city gas to 250 or 300 pounds pressure they find there is a loss of something like 20 to  $33\frac{1}{3}$  per cent. in candle-power. compression "knocks out" the illuminant in city gas, and until there is no more than two-thirds of the original candle-power left. Starting with, say, twenty-fourcandle gas, we may get perhaps sixteen after compression. City gas can not be compressed without heavy loss, and it follows that city gas can not be compressed to two hundred pounds per inch or more; but my thought was that compressing it to only one-tenth of that (that is, from ten to twenty pounds instead of 300) the practical loss in candle-power would be only one candle, or half a candle, or not serious; and the result of my work so far bears out that idea; other evidence indicates that compression up to fifty or sixty pounds makes no special difference. It enables us to reach a range far beyond the present range of pressures used with artificial gas without serious loss in candle-power.

## THE PUMPING-ENGINES IN THE CITY OF PHILADELPHIA.

#### HENRY G. MORRIS.

Read June 2, 1900.

PHILADELPHIA enjoys the distinction of using a greater number of gallons of water per capita, and having a larger number of pumping-stations equipped with a greater variety of pumping apparatus, than any other city in the world, and from these facts it might be inferred that we should find at these pumping-stations the most approved and efficient types of pumping-engines.

The following historical résumé has been prepared, giving the dates of installation of the various pumping plants:

1797. Petition to Councils for water-supply.

1799-1801. Center Square works built. Water pumped by steam engine from Schuylkill River at foot of Chestnut street to engine at Broad and Chestnut streets, which raised it to tank. Wooden boilers used at Center Square replaced by cast-iron one in 1804. Works designed by B. H. Latrobe.

1804. Cast-iron water-pipe first laid in city.

1812. Steam works at Fairmount commenced.

1815. Fairmount works started and Center Square works abandoned.

1819. Fairmount dam started; 1821, finished.

1822. First breast wheel started pumping. (Double-acting force-pumps, 16 inches in diameter.)

1822. Steam pumping abandoned.

1843. Breast wheels Nos. 7 and 8 started pumping.

1844. Schuylkill works (Spring Garden) went into operation. Steam engines by Merrick & Towne and I. P. Morris & Co.

1845 (?). Kensington works built at foot of Wood (Otis) Street.

1851. First turbine wheel started at Fairmount.

1855. Twenty-fourth Ward works went into operation.

1866. Germantown works (built in 1851) bought by city.

1869. Roxborough works went into operation (April 5th).

1869-1871. New turbines put in at Fairmount.

1870. September 19th, Belmont works started with Worthington duplex engine (No. 1), and the Twenty-fourth Ward works abandoned.

1871. July 18th, No. 2 Worthington engine started at Belmont.

1871. October 25th, 6,000,000-gallon Worthington engine started at Kensington works.

- 1872. Simpson compound-rotative (No. 6), built by Henry G. Morris, started to pump at Spring Garden station.
- 1872. August 1st, Worthington (No. 2) at Roxborough started.
- 1872. Germantown works abandoned by the city.
- 1873. Chestnut Hill works bought by the city.
- 1876. Twenty-million-gallon marine compound rotative, by William Cramp & Sons' Ship and Engine Building Company, put in at Spring Garden (No. 7).
- 1877. December 1st, Lardner's Point, Frankford station, went into operation, with 10,000,000-gallon marine engine, by William Cramp & Sons' Ship and Engine Building Company.
- 1883. Last breast wheel with pumps removed from Fairmount.
- 1887. September 28th, 20,000,000-gallon Gaskill engine by Holly Manufacturing Company started at Spring Garden.
- 1890. Kensington works abandoned.
- 1892. June 15th, 20,000,000-gallon engine, by Southwark Foundry and Machine Company, started at Spring Garden.
- 1893. April 24th, 12,000,000-gallon engine, by Southwark Foundry and Machine Company, started at Roxborough station.
- 1894. Queen Lane station begun. Engines built by Southwark Foundry and Machine Company.
- 1894. Fifteen-million-gallon engine put in by Southwark Foundry and Machine Company at Frankford. (Not accepted until 1897.)
- 1894. December 1st, 30,000,000-gallon Holly engine, put in by Holly Manufacturing Company at Spring Garden, started.
- 1894. Five-million-gallon Worthington engine from old Kensington works put in at Roxborough auxiliary station, and started May 17th.
- 1895. February 11th, 30,000,000-gallon engine, put in by Holly Manufacturing Company, at Spring Garden, started.
- 1895. Belmont auxiliary station went into operation with a 2,000,000-gallon Worthington engine (June 27th).

The purpose of this paper is to give a brief description of the different styles and types of pumping-engines that have been and now are in use at the various stations, commencing with those which were constructed subsequently to the time when the supply obtained from the Fairmount water power became inadequate to supply the wants of the city.

At that time, the choice of steam-driven pumps was confined to either the horizontal, long-stroke pump, with an engine attached, or to the Cornish beam or "Bull" engine, examples of all of which were in use, but have since been displaced by more modern types.

Aside from the side-lever Cornish engine, designed by the late Frederick Graff, which was removed from the Spring Garden station in

1883, the types to which reference will be made come under the two general heads of "direct-acting" and "rotative." The former is represented by the "Worthington" engine in its forms of "compound" and "compound high-duty." The rotative type presents a greater variety of forms, such as the "Simpson," having overhead beam and fly-wheel, the "Gaskill horizontal compound-duplex," having a short beam between the cylinders, connected by quarter-cranks to a fly-wheel, mounted on the pump-cylinders, which appears to be an attempt to bring the space occupied by the engine to an approximation of that required by the "Worthington" engines.

About the time that the compound inverted cylinder marine engine was being generally introduced, it was thought desirable to adapt that type of engine to pumping water, and we find an example of this form at the Spring Garden station, known as the "Cramp engines," having short beams and connecting-rods to quarter-cranks and fly-wheel, the pumps being directly below the steam cylinders.

Another style of rotative engine at the same station is the duplex compound "Southwark," having bell crank-beams, fly-wheel, and horizontal pumps.

A third style of rotative pump at the same station is the "Holly triple expansion," which does not differ from the other marine type except that two fly-wheels are placed between first and second and second and third cylinders.

At the Frankford station we find another engine of the marine type, built by the William Cramp & Sons Company, and also a horizontal cross-compound Corliss engine, with pumps attached to tail end of piston-rods, and a Southwark compound quarter-crank rotative engine.

At the Queen Lane pumping-station are four vertical triple-expansion rotative engines of a total capacity of 80,000,000 gallons in twenty-four hours, which present an imposing appearance.

At the Belmont station are located three Worthington compound low-duty engines, and one Worthington compound high-duty engine, having an aggregate capacity of 38,000,000 gallons per day.

There is one other pumping-engine in service at the Roxborough station (Shawmont), which should be considered as a distinct type, although it might be classed among the direct-acting nonrotative engines. This is the "d'Auria pumping-engine," which is of 2,500,000-gallon capacity against the same pressure as the other pumps at this

station, but is noticeable from the fact that, although of only 18-inch stroke, it easily and quietly maintains an equal piston speed per minute as rotative pumps of very much longer stroke, and this not-withstanding the fact that it has no foundation, and is not even bolted to the floor.

We have, then, three distinct types of engines, with quite numerous modifications of the rotative ones, and the characteristics of these three types of pumping-engines, to wit: the direct-acting or Worthington type, the crank-and-fly-wheel type, and the d'Auria nonrotative type can be succinctly put down as follows: In the Worthington type, whether simple, compound, with or without cut-off valves, the resultant force derived from the steam and upon the water end must remain practically uniform from the beginning to the end of the stroke. This condition necessarily impedes the free exercise of the skill of the engineer in designing the steam end of the Worthington In other words, he can not adjust the point of cut-off or expansion in the very best manner to obtain the highest results of steam economy. Of course, in the simple type, it is well known, steam is taken from one end to the other of the stroke, without cut-off, at a uniform pressure. In the compound, low-duty engine no cut-off is used on either cylinder, and the receiver space and exhaust are so proportioned and contracted as to produce a resultant combined diagram which is practically a rectangle. In the high-duty Worthington pump this same result must be secured while cutting off steam in the high- and low-pressure cylinders at special points of the stroke, so that the resultant of the effect in the high- and the low- combined with the action of the high-duty attachment so-called, will produce a resultant force uniform from the beginning to the end of the stroke. In the Worthington type of engine, of course, with a uniform piston speed, this speed must necessarily be kept comparatively low.

In the crank-and-fly-wheel type the distribution of steam is perfectly untrammeled—that is, the engineer can use his best skill and judgment in fixing point of cut-off, expansion, ratio of cylinders, etc., to secure the highest economy of steam; and with this type the piston speed is considerably higher than in the previous type of engine, but it may be stated roughly that the weight of engine per horse-power in the crank- and fly-wheel engine is about three times as large as in a Worthington engine.

In the d'Auria type the designing engineer has the same freedom in designing the steam end as in the crank-and-fly-wheel pumping engine, so that as a matter of steam economy these two types of engines are on the same basis, but the speed of the d'Auria engine, owing to its peculiarity of action—very similar to that of a pendulum -is much higher than in a crank-and-fly-wheel engine. The engine itself is absolutely self-contained, and free from shocks and concussions. Its hydraulic compensator makes this engine much easier to run, and gives it much greater safety than a Worthington pump. The two sides, while working like the two sides of a crank-and-fly-wheel pumping-engine with cranks at right angles, are at the same time free to adjust themselves to the condition of minimum combined effort upon the water end, so that a perfectly uniform pressure can be maintained upon the pump at a very high reciprocating speed. other words, the two sides work as if they were linked together with cranks at right angles, keyed upon a common shaft, possessing a very high degree of torsional elasticity, the angles between the cranks deviating from 90 degrees in one direction and the other in one revolution, to which elastic action the uniformity of discharge is due. One of the most essential features of the d'Auria pumping-engine is that its weight per horse-power is about one-third of that of a Worthington pumping-engine, and therefore about one-ninth of that of a crankand-fly-wheel pumping-engine. This reduction of weight, with freedom to obtain very high economy of steam, makes it possible to produce a high-duty d'Auria pumping-engine at a considerably less cost than any other type of high-duty pumping-engine without implying cheapness of design, workmanship, or material employed in its construction.

#### DISCUSSION.

L. D'AURIA.—In the d'Auria engine there is placed between the steam end and the water end what is known as the d'Auria compensator, which is a cylinder terminated by two enlarged chambers which are joined by a loop of pipe, designed to form a very rigid bed-plate. The steam-piston, the pump-plunger, and the plunger in the compensator are all fixed upon the same piston-rod. The hydraulic compensator is full of water, and is kept so by a feed which automatically compensates for leakage through the stuffing boxes. Thus the mass of water always fills the compensator and pipe. The function of this compensator is much like that of a balance-wheel of a watch, and if we had a compensator pipe of glass and the liquid colored, a to-and-fro motion of the water would be

seen when the engine is operating. To make the analogy more positive, suppose that this loop of pipe were thrown into the shape of a circle, and all this part of the engine covered except the ring; then, only a liquid balance-wheel would be seen, oscillating while the engine is moving. By means of this liquid balancewheel it becomes possible to start the engine with a very high initial pressure. The steam can be cut off at one-third or one-fourth stroke in the high-pressure cylinder, then expanded in the low-pressure cylinder, and cut off again at any point of the stroke desired to secure economy. The main admission valves are connected by a stem, and on top there are the cut-off valves. This is the first compound engine the company has made. Steam is cut off on both the highand low-pressure cylinders without any restriction. Several other engines were built before this without compounding, but cutting off steam in the one cylinder only, at various points of the stroke, and they have given remarkable results both as to smoothness of action and economy. No other pumping engine, not compound, can use steam expansively by cutting off, without having a fly-wheel. The d'Auria pumping-engine is the first one capable of using steam expansively in one cylinder to any desired degree without the use of a fly-wheel. ple imagine that the d'Auria engine has its fly-wheel in the compensator, but I want to call your attention to the fact that there is a material difference between the ordinary fly-wheel of pumping-engines and the hydraulic compensator of the d'Auria engine. In the latter case, if I were to change the size or the length of the pipe—suppose, for example, I should move the bend closer, so as to shorten the pipe—it would increase the speed of that engine quite considerably; and if I were to lengthen that pipe by adding another section to it, the engine would slow up very considerably. This is exactly what takes place in a watch, if the dimensions or weight of the balance-wheel are changed. I recall that a good may years ago a young man in a class I taught at the School of Application of the Royal University of Naples put this question to me: "Suppose, after having built an engine and having put on it a certain size fly-wheel, I would put another flywheel on its shaft, what would happen to the speed of that engine?" It made me think. The problem had never come to my notice before, nor had I found anything in books at that time. I said that I could not answer it—that I would look into the problem first. At the next lecture I brought out a demonstration showing that the additional weight of the fly-wheel would not change the speed of the engine at all, but would only bring the maximum and minimum speed in one revolution closer together. You see, therefore, the difference between the action of a fly-wheel and that of the water in my compensator. In this latter case the increased weight affects the speed materially, and we can calculate exactly how much. With the fly-wheel we can increase the size or weight to any extent (the friction remaining the same) and yet the mean speed of rotation would remain the same. The only effect would be on the uniformity of motion of the fly-wheel.

There is another thing worth considering in the d'Auria engine, and that is that all the events which occur in it take place in the period of one stroke. With the fly-wheel engine it is necessary to work up to a certain regimen, which takes

a certain number of revolutions to reach. This is a very important thing under certain conditions of pumping. Another important point about the d'Auria engine is that, although of the direct-acting duplex type, there is no lost motion in any of the valves or joints which is found in such type of engine. then, in the d'Auria engine, is that the two sides work with respect to one another as if they were connected by a shaft with cranks at right angles, and therefore the long pause at the end of the stroke, which exists in ordinary types of duplex direct-acting pumping-engines, is absent in the d'Auria pumping-engine, although by careful observation a short pause at the end of the stroke can be observed. You have already heard Mr. Morris speak about the elasticity of motion in the d'Auria pumping-engine. With cranks at right angles rigidly connected, one piston is bound to follow the other in accordance with a fixed law. d'Auria engine the imaginary cranks and shaft connecting the two sides are Thus, while the two sides are working together, the angle between the imaginary cranks is deviating one way and the other from the 90 degrees, and the combined action is governed by the law of least variation of pressure upon the water end. I regret I can not show you some indicator cards which were taken from this machine. Mr. Morris said, when he saw them, that I had a good draughtsman draw them. They are certainly perfect. I do not know where I have seen their equal. As to the economy, I have said this is the first compound engine the company has made. There has been no experiment before this engine. It is the first one built. Of course, there has been a good deal that has been simplified. In the present design plain slide valves were put in. These are somewhat more expensive, but more easy to adjust. In England they seem to prefer flat valves to rotative valves. Both designs are available, and everybody can be satisfied on this point. Mr. Morris referred to the fact that the d'Auria engine can be so designed as to give the highest possible economy of steam, and I would say that that is absolutely true. When we design the steam end, we settle upon the cut-off, expansion, compression, etc., with a view to get the highest economy of steam. We can do this, because the d'Auria compensator will compensate perfectly whether we cut off steam at one-half stroke, or one-quarter stroke, or at any other point. We have absolute freedom in designing the steam end, the same as a good designing engineer can have in designing the steam end of a crank-and-fly-wheel pumping engine. that the d'Auria engine is capable of as high a duty as the crank-and-fly-wheel engine. We have, besides, a higher reciprocation than in the crank-and-flywheel engine. For instance, in the latter the number of revolutions per minute is limited to about thirty, and therefore in order to secure a high piston speed the stroke must be made long. In the d'Auria engine shown before you, with an 18-inch stroke, the number of revolutions per minute when working against a pressure of about sixty pounds at the Roxborough auxiliary station was as high as eighty, with a piston speed of 240 feet per minute; and yet, the engine has never been fastened to the floor on which it stands, nor has it required solid foundations other than to support the weight of the engine alone. You have listened to Mr. Morris' description of the various types of pumping-engines in

the Philadelphia Water Works, all of which are very much larger engines than the d'Auria engine which is now at Shawmont pumping station, and yet you would scarcely believe that there is not one among the large pumping engines described by Mr. Morris which, even with their ponderous foundations and long stroke, could approach the speed at which the d'Auria engine is now running. The high speed of reciprocation has some bearing on the economy of steam as far as it affects cylinder condensation. Of course, some may dispute this point, but I think that of two engines, both with the same piston speed which is ordinarily possible with pumping-engines, say 200 or 250 feet per minute, that the engine with the larger number of reciprocations per minute would have less loss due to My idea is based upon the theory cylinder condensation than the other engine. that if the interval of time during which condensation takes place in a steam cylinder be divided into a number of equal parts, the loss by cylinder condensation in the first part is less than that which would occur in the second, and so on. Therefore, in two short strokes, for instance, the sum of the losses by condensation due to each stroke is considerably less than the loss by condensation which would occur in one stroke of double the length. I find that the difference in cylinder condensation due to high speed of reciprocation becomes insignificant when this speed reaches about 100 revolutions per minute, and as this speed is always attained with stationary engines, it can be seen that in these engines the question of cylinder condensation is not affected by high speed of reciprocation; but in pumping-engines, where the speed has been limited to about thirty revolutions per minute, there is room for a saving. As I said before, engineers may disagree on this point, but there is one thing certain, and that is that high speed of reciprocation can not increase cylinder condensation, but it has some chances of lessening it; therefore, we claim that in the d'Auria engine we have every feature which can contribute to high duty. Regarding the safety of the d'Auria engine, I will point out the fact that when the piston or pistons have passed the middle of the stroke, the propelling force of the engine becomes less and less than the resistance offered by the pump, so that at the end of the stroke the moving parts come naturally to rest, as the weight of a pendulum stops itself at the end of its ascending excursion. In the engine proper the weight of the pendulum would be the weight of the column of water and that of the moving parts. Suppose we suspend a very heavy ball like a pendulum by holding it, say, two feet from its middle position. This ball (neglecting friction) will move four feet, stopping when it is two feet on the other side of middle position, and I am sure nobody would be afraid to put his head just where the ball stops itself, because there is no possibility of overrunning the stroke. If, instead, we had the small ball on a horizontal smooth plane, and by applying to it a certain force we would set it in motion, when this ball has made a stroke of four feet nobody would dare to stop it at that point with his head. We require some buffer to stop it by destroying its energy. This makes it clear why, in a pendulum-like engine like the d'Auria engine, a high speed of reciprocation can be reached with safety, while in the ordinary direct-acting pumping-engine the speed must be kept very low to avoid disaster. Of course, there is the possibility that sometime a sudden drop in the load of the engine may occur. In the d'Auria engine, when this occurs, there will be an excess of energy accumulated at the end of the stroke which the positive steam cushioning, provided in the steam cylinders, may not be able to overcome or absorb entirely, and therefore might bring the piston in contact with the cylinder head. Now, this little overrunning of the strokesay about \ of an inch over and above the normal stroke—would cause the plunger of the compensator to open a by-pass consisting of holes drilled in this same plunger, and through which the moving column of water of the compensator is allowed to pass without producing a water-hammer. In this case a considerable amount of the excess of energy is stored up in the steam cushioned in the clearance spaces of the cylinders, ready to do work on the next stroke; and another part of this excess of energy is, of course, neutralized by the friction of the water column through the by-pass. This would happen only in case of an accident, but in normal conditions the by-passes are never opened. this engine run under very severe conditions, imposed upon it by a mistake made by the attendant in not opening the gate-valve on the suction pipe of the pump. There was enough steam put on the engine and enough vacuum to develop sixty horse-power, and nothing to resist this power. A prominent engineer from New York was with me at the time, and we were both scared to see how fast that engine ran. After it was stopped, I examined the cylinder-heads, and to my surprise I found that the pistons had never touched the cylinder-heads. not give a more severe test to the engine than was given to it through this acci-It convinced me that that compensator worked all right. would like to see the details of the by-pass in the compensator I will be glad to show it on the blackboard.

L. Y. Schermerhorn.—How much heat is developed in that water-balance when in operation?

Mr. D'AURIA.—Several experiments have been made, and it has been found that the heat of the engine itself warms up the water in the compensator by conduction through the metal. I have found the temperature to be 22° F. above the temperature of the room. But as the mechanical efficiency is high—at Shawmont, from diagrams, it appears to be about 95%—there can not be much heat due to friction of the water in the compensator. In some experiments made on the first d'Auria engine some time ago at Eighteenth and Hamilton Streets there was a long loop of 4-inch gas pipe, and I found that 2.3% of the power of the engine was consumed by the friction of the water in the compensator pipe. This was determined by finding first the mechanical efficiency of the engine when running at 160 feet per minute, and then by taking a friction-card with sufficient steam to barely move the engine from one end to the other of the stroke. size of this engine was 12 x 6 x 12 inches, cutting off steam at about one-quarter I made some study of the subject of friction of water in pipes before the first d'Auria engine was built, and I found in this case that the friction should be about one-half that which occurs in an open pipe with free end discharge. reasoned the matter in this way: We have in this case a continuous reentrant column of water filling the compensator and its loop of pipe completely and under

194

Therefore, eddies in such a column of water while moving en masse can hardly take place, and only skin friction is involved, which is about one-half of the total loss in ordinary cases of water in pipes. My experiments seemed to verify this conclusion pretty well. Moreover, I found that the heat would have the effect of reducing friction in a general way, and looking up some investigations made by Prof. Osborne Reynolds, I found that he had reached the same conclusion, and that friction varies inversely with the absolute temperature of the water approximately. Of course, when the change of temperature involved is only twenty degrees, there is not very much gain, but still there is some.

E. M. NICHOLS.—The release ports of which you spoke are on both sides of the plunger, are they not?

Mr. D'AURIA.—Yes.

THE PRESIDENT.—Was that first installation made about five years ago?

Mr. D'Auria.—No; that is an interesting story. The origin of this machine dates back to the time when Colonel (now General) Ludlow was the head of the Water Department of Philadelphia—about fifteen years ago, at which time I was employed by him in this department and became a great admirer of the Worthington type of pumping-engine, to which type the d'Auria pumping-engine belongs, with the improvement that in the latter it is possible to use steam expansively in any way and to any desired degree, while in the former pumping-engine this was impossible. I was going to make some experiments to get at the reason that steam expansion in a Worthington pumping-engine was not possible by the use of cut-off valves, but I was prevented from carrying on those experiments, with the result that I put all my time to investigating the problem purely from a scientific standpoint, and I hope that at some future time I shall have an opportunity to show some very interesting points which I discovered in the field of All I can tell you now is, that I was able through that investigation to see what was wanted to transform a Worthington pumping-engine into a high-After applying for patents—the granting of which duty pumping-engine. occupied a period of about three years, involving a practical demonstration of the principle of the invention before the examiners of the Patent Office by means of a model—the principle was tested some time afterward on a large scale by fitting an ordinary steam-pump with attachments to secure steam expansion and connecting the piston-rods of such pump to two balance-wheels oscillating 60 degrees angle in each stroke. This machine worked as steadily and prettily as a big watch. Its smoothness of action was as good, if not better, than that secured with the hydraulic compensator. By the way, this smoothness of action in the d'Auria pumping-engine has caused a good deal of trouble on account of the appearance of doing nothing the engine has while working. An engineer high in the profession said recently, while looking at the d'Auria engine at Shawmont : "I don't believe that machine is pumping any water." It is, indeed, really deceiving. Fortunately, at the time when, even in the Water Department, the impression had been created by the smooth running of the engine while doing work at the Roxborough Auxiliary Station that the pump was not pumping water, a test was determined on at that station by means of the Venturi meter and the result of this test showed such an agreement between the water displaced by the plunger and the water passing through the meter that the difference was within the error of the instrument—considerably less than one per cent.

JOHN E. CODMAN.—Suppose a 15,000,000 or 20,000,000-gallons pump was working under full pressure of steam and full resistance, would it run away if the delivery main were to break?

MR. D'AURIA.—I have not made that experiment, but I will show you what we provide for such an emergency. In the pipe of the compensator we adjust a disc-valve revolving around a diametral spindle. In the middle of this disc there is a small hole. In the ordinary running of the engine that disc-valve is kept edgewise to the motion of the water in the pipe by means of an arm balanced by the pressure of the water in the main and by a spring working against it. Now, if the pressure of the water falls suddenly by the breaking of the main, you can see how the disc becomes unbalanced and places itself crosswise to the motion of the water in the compensator pipe. Under such conditions, of course, this water is squeezed through the central hole of the disc and the engine can not run fast.

JOHN C. TRAUTWINE, JR.—Will you describe the experiments made with your pump some years ago, when you were asked to stop the pump by the discharge?

Mr. D'Auria.—We used to stop the pump by throttling down the discharge pipe very suddenly without touching the steam-throttle, and then release the water all at once. I remember there were variations of 40 to 50 pounds on the water end in a few seconds, but the compensator pipe took care of such variation and prevented any break. All this was done while the engine was cutting off steam at one-quarter of the stroke. The best exhibition of the effectiveness of the compensator in a d'Auria engine is given when we cut off steam in the steam cylinder at, say, one-third of the stroke, and all the resistance opposed is that of air being compressed up to a certain pressure, as in the d'Auria compressor. one experiment with such a compressor fully 64 per cent. of the total power of the engine in the stroke was controlled by the compensator, the machine being only a 6 x 6 x 6 inches, and at the time the experiment was made it was making 375 strokes per minute, without being bolted upon the floor. Of course, these things must be seen to be believed, and I only can say this test was made in the presence of several engineers in the shop of the Maryland Steel Company at Sparrow's Point, Md.

Mr. Codman.—Suppose that an obstruction occurs in the main, would it split the pump?

Mr. D'Auria.—That depends on the pump. If you stop this pump by closing the discharge valve in the main, and without shutting off the steam, there would be an increase of pressure upon the pump which would cause the engine to stop. With a crank-and-fly-wheel pump there is hardly any doubt that the pump would split.

Mr. Codman.—Suppose it occurred with a large pump?

MR. D'AURIA.—I will answer by stating that in the engine at Eighteenth and Hamilton Streets we made this experiment many times without breaking the

pump, and I do not see why the same result would not be obtained with a much larger pump proportionately well designed.

FRED. W. GORDON.—Do I understand you to say that the holes in the plunger of the compensator prevent the piston from striking the end of the cylinder? I also understood you to say that the energy is very expended at the end of the stroke. How would you release that?

MR. D'AURIA.—The holes in the plunger will not open and form a by-pass under normal conditions of working. They operate only when an excess of power accumulates at the end of the stroke, in which case this power, while being met by a positive steam-cushioning on the other side of the steam-piston, will cause the engine to make a little longer stroke than normal. Then it happens that the holes in the plunger overrun the bearing of the plunger and allow the column of water in the compensator pipe to squeeze through. By this operation the energy residual in the column of water is gradually expended before it is able to bring the steam-piston against the cylinder-head.

MR. SCHERMERHORN.—In connecting the action of the water with that of the balance, I assume that if the steam was taken off the engine, that the engine would continue to make a number of revolutions until it had used up its energy.

Mr. D'AURIA.—When we stop the engine by shutting off steam the pistons will continue to oscillate, making shorter and shorter strokes until they come to rest in the middle of the stroke. It stops gradually, and you can see that in starting from this natural position of rest the engine will start with a short stroke, gradually acquiring its full stroke—a beautiful system for starting a big mass of water.

THE PRESIDENT.—Have any similar pumps come to your notice on the part of other inventors?

Mr. D'Auria.—I have been told several times by eminent engineers that in the history of mechanics my engine is the only case of a machine built upon a theory. Generally, the engine is built first, and the theory comes afterward. In my case, the principle of construction of the engine appeared at the end of a voluminous mathematical investigation of the problem, which brought me beyond the limits of mathematics usually met in engineering. The fact is, that I have been striving for a good many years to make the principle of my engine understood by the profession, but I must say that only the few who have taken the trouble of listening attentively to me have grasped it. Some people have gone so far as to deny what we have practically accomplished, even while looking at the engine running, and I am not exaggerating when I state to you that those supposed to know most about pumping-engines declared the d'Auria pumping-engine an impossibility.

MR. NICHOLS.—Do I understand that you demonstrated what the efficiency of that engine was, based upon the ordinary method of calculating the efficiency of pumping-engines? What is the duty?

Mr. D'AURIA.—The question of duty in the d'Auria pumping-engine is dependent upon the same conditions as in crank-and-fly-wheel engines, as I have already stated. For instance, in a triple-expansion d'Auria pumping-engine which

I have just designed we guarantee a duty of 140,000,000 feet-pounds per thousand pounds of steam.

MR. NICHOLS.—What is the size of the engine?

Mr. D'Auria.—About 800 horse-power. The mechanical efficiency of a d'Auria pumping-engine is higher than in any other type of engine for the reason that we have fewer parts in motion, and also because of the perfect and stable alignment of the piston-rods due to the rigidity of the bed-plate we make for the engine out of the compensator type. The fact is, a d'Auria engine can be laid on any floor without losing its alignment.

MR. NICHOLS.—I understood Mr. Morris to say that for the same amount of power secured the engine has a great deal less material. In this engine, speaking of 800 horse-power, what is the weight compared with the other types?

MR. D'AURIA.—On an average, a d'Auria engine will take about 300 pounds of metal per horse-power; sometimes we go below, sometimes a little higher, but that is a fair average. In the Worthington type, which comes next for light weight, it takes about 1000 pounds of metal per horse-power; and in the crankand-fly-wheel type it takes from two to four thousand pounds of metal per horse-power. With such an economy of weight we can well afford to construct the d'Auria engine with the best of material and workmanship, and although we can sell such an engine at a very low price, compared to others, this does not imply that we make a cheap engine. We do not need to skim metal away to compete with other engines on the market, and therefore we can afford to give a considerable margin in size and capacity, although with this we save a very considerable amount of space in the engine-room and the cost of foundations.

MR. TRAUTWINE.—Will Mr. d'Auria throw a little more light on his explanation of the low frictional resistance through his bent pipe? I gather that he thinks that eddy motion is eliminated.

MR. D'AURIA.—Imagine a straight piece of pipe with two pistons held at a considerable distance apart by being fastened upon a common piston-rod, and imagine the space between those two pistons to be filled by water under a certain pressure, so that it touches the inside of the pipe everywhere. If you move the piston-rod, the column of water will move en masse with the pistons, and therefore it will suffer only skin friction. This is the case in the compensator pipe of the d'Auria engine. In the experiments made of the friction of water in pipes, the water is allowed to discharge free at one end, and this condition makes it possible for the column of water to separate itself from the walls of the pipe at various points and from eddies.

MR. TRAUTWINE.—Would not the conditions in an ordinary pumping main be the same as in the upper figure sketched on the board?

Mr. D'AURIA. -Yes; under pressure they would to a certain extent.

Mr. Trautwine.—Take, for example, the pump at the Queen Lane Reservoir. I think you have conditions equally like that which you describe. Even in the upper figure you admit a certain amount of skin friction all around the pipe. It seems to me it must hold those particles back and create a rotary current in the pipe.

Mr. D'AURIA.—We deal with the viscosity of the liquid, not with the friction between metal and water.

MR. TRAUTWINE.—There is one point which may have occurred to some. It will be noticed that that loop is terminated at each end by a semicircular section of pipe with a rather short radius, and the question might arise whether that short bend did not create a good deal of friction; and it might be of interest to know that Professor Williams made some elaborate experiments with a view to ascertaining the resistance in bends of different radii. It is one point in hydraulics that the greater the radius the less the resistance. His experiments demonstrate, if anything, the contrary. In the first place, the radius had little effect, and he brought it down to a very short radius indeed—not more than the diameter of the pipe—and in short bends he found the resistance decreased. He was trying one of the pipes bent over itself—the radius the diameter of the pipe. The question might suggest itself why you should not make a full circuit, but I doubt whether you would gain anything by it.

Mr. D'Auria.—This is very interesting. Only I call to your attention that the bends in the d'Auria compensator are made of sufficient radii to prevent an unnecessary amount of friction. The fact that our engines have such a high efficiency proves that the friction loss involved in the compensator is necessarily small.

Mr. Schermerhorn.—The length and the diameter of the water-pipe are determined after you have computed the speed of the engine?

Mr. D'AURIA.—I find first the piston-speed consistent with the condition that the pump-barrel fills up completely at each stroke. Then I settle upon the amount of work which the compensator has got to take up and give out again in a single stroke. With these data I design a loop of pipe which makes a pretty appearance and a good foundation for the engine itself, and I determine the velocity of the column of water in this pipe to give me the necessary energy and inertia; then I proportion the compensator plunger to it. That is all. The compensator itself, however, is made large enough to accommodate the largest size plunger than can be used in connection with the compensator pipe, and if we find that a smaller plunger can be used in certain conditions, we simply put in a sleeve and reduce the diameter of the plunger. For instance, in the d'Auria engine which is now at Shawmont Pumping Station we have a 12-inch plunger and a 6-inch pipe. When this same engine was working at the Roxborough auxiliary station against a much smaller pressure, I found it necessary to use a plunger 8½ inches in diameter, but the pipe was the same. This same engine is expected soon to migrate again from Shawmont to the Wentz-Farm station, and in order to use its full power the same 12-inch plunger will be left in the compensator, and the volume of water pumped against the pressure of that station will be about 4,000,000 gallons in twenty-four hours. I suppose that there are few pumpingengines, if any, in the Philadelphia water-works that can be sent from station to station like the d'Auria engine, which in this case is a regular tramp engine.

### REVIEW.

WATER AND WATER SUPPLIES. John C. Thresh, D. Sc., M. D., D. P. H. Second edition, small 8vo., XV, 408 pages. Philadelphia, P. Blakiston's Son & Co.

This is a treatise on the general question of water-supply, adapted to the needs of health officers and sanitary engineers. The author states especially that his object has been to enable the medical officer of health, in conjunction with the district surveyor, to report on the wholesomeness and sufficiency of existing supplies, and to formulate practicable schemes for new supplies. To the solution of this problem he brings the results of much experience in rural districts.

The principal topics treated are composition and properties of various classes of natural water; effects of impure water; interpretation of water analyses; self-purification of rivers; artificial purification, domestic and public; quantity of water required; construction of wells; instalment of pumping, storage, and distributing systems; laws relating to water-supply.

The work is well printed, has numerous illustrations and a good index. It does not enter into the description of processes of analysis, but the value of the various standard analytic data is discussed at some length. It is a compact and clearly written conservative summary of the present state of sanitary engineering in this department.

of the railroad which originated it, and Mr. Osborne made an address on the occasion as "the only man then living who had been actively connected with the building of the one and the laying out of the other."

In 1852 Mr. Osborne also took charge of the Dauphin & Susquehanna Railroad. In 1854 he took charge of the Lebanon Valley Railroad, which was opened to Harrisburg in 1858, and he was connected with it at intervals up to 1863. From 1859 to 1870 he was professionally connected with the East Mahanoy, Danville & Northumberland, the Shamokin & Northern, the Jersey Shore, Pine Creek & State Line, the Elmira & Williamsport, and the New York & Oswego Midland Railroads, and had examined bridge sites for the Baltimore & Ohio Railroad at Parkersburg and Bellaire.

In 1870-71, as Chief Engineer of the Western Maryland Railroad, he was engaged in the construction of its most difficult work over the mountains. Later he was connected with surveys for the Tuckerton & Atlantic, the Washington, Cincinnati & Ohio, the Shenandoah Valley & Ohio, and the Susquehanna & Delaware River Railroads, and in 1888 was Consulting Engineer for the late Moncure Robinson, on his North Carolina and South Carolina lines. In 1882-3, as engineer for North Atlantic City in the closing of an inlet on Brigantine Beach through which the sea flowed, he used bags of sand in such a manner that the action of the sea completed the work most satisfactorily.

He was especially successful in the designing of bridges, whether of wood, masonry, brick or iron, notable examples of which are the stone skew arch bridge on ellipsoidal curves over Sixth Street, Reading, Pennsylvania (said to be the first of its kind ever built in this country), the long-lived wooden Howe-truss bridge across the Schuylkill at Reading, which was burned during the railroad riots of 1877, and the Swatara brick arch bridge on the Lebanon Valley Railroad, which has stood against floods that carried other bridges against it. He also did some difficult tunnel work, including the Port Clinton "Pulpit Rock" tunnel. He was the engineer in charge of the great Philadelphia coal-shipping wharves at Port Richmond, the first long ones of which he built and most of which he also planned.

He wrote many extensive reports on special investigations, and published books or brochures on various engineering subjects of general interest to the profession, among which are "Select Plans for Engineering Structures," "Treatise on the Merits of Narrow-gage Railroads," and a "Professional Biography of Moncure Robinson"; and he suggested and originated the "Lyons' Tables," which are still used by engineers. He was the inventor and patentee of the suspension truss and elastic arch truss for bridges. Since 1856 he was a life member of the Institute of Civil Engineers of Ireland, and an active member of The Engineers' Club of Philadelphia. He was well posted in railroad law, his knowledge having been gained largely from experience, and he was frequently called before the courts of New Jersey and Pennsylvania as a railroad expert.

In his long and varied professional experience in different countries he was more or less intimately associated with many of the noted engineers and other railroad and professional men in this country and Great Britain, most of whom have preceded him to their last rest. Among these were Geo. W. Childs, John Tucker, Robert Frazer, C. E., Wm. Hazel Wilson, C. E., John C. Trautwine, C. E., Moncure Robinson, C. E., Harry Biddle, C. E., Franklin B. Gowen, Samuel Richards,

John Lucas, and Benjamin H. Brewster, all of Philadelphia; the Hon. Abraham Browning, of Camden, N. J.; Benjamin H. Latrobe, C. E., and General I. R. Trimble, C. E., of Baltimore; William Miles Cary Fairfax, C. E., of Virginia; Thomas Pinckney Huger, C. E., of Georgia; John A. Roebling, C. E., of New York; the Stevensons and Charles Vignoles, of England; and Howe, the inventor of the truss bridge known by his name.

He was a man of great energy, had a fund of anecdotes taken from his experiences, and was an entertaining conversationalist. He was a naturalized citizen of the United States and a member of the Episcopal Church.

In November, 1842, Mr. Osborne married Eliza, daughter of Bartholomew Graves, of Philadelphia, at one time Prothonotary. Mrs. Osborne died in October, 1896.

Mr. Osborne's personality, his profound knowledge of his profession, his kindness and helpfulness to its members, and his deep pride in it, insensibly drew to him all those who came to know him, and, in spite of his retiring disposition, won him many friends. The impressions thus formed upon an early acquaintance were only confirmed and strengthened as further intercourse gave deeper insight into the excellencies of his character. His death removes from our midst an honored member, the story of whose long, clean, and very active life may well be summarized in the words of one of his own verses:

"The record, too, of uprightness,
Fidelity, and care,
As fruits of living righteousness,
Which crowned man's efforts with success."

## ABSTRACT OF MINUTES OF THE CLUB.

REGULAR MEETING, April 21, 1900.—The President in the chair. Sixty-five members and nine visitors present.

Dr. Henry Leffmann presented a communication on "Coal-tar and Coal-tar Products." The subject was discussed by Dr. J. Merritt Matthews.

Dr. H. M. Chance exhibited and described a series of views taken before and after the break of the dam in the Colorado River at Austin, Texas.

Business Meeting, May 5, 1900.—The President in the chair. Eighty-one members and fifteen visitors present.

Mr. Frederick H. Shelton presented a communication on "Modern Methods of Manufacturing Illuminating Gas." The subject was discussed by Messrs. Gordon, Forstall, Marburg, Schermerhorn, and Christie.

The Tellers reported the election of Messrs. H. P. Cochrane, Chas. E. Machold, W. O. Pennell, and C. R. Rothwell to active membership; S. R. Earl to associate membership; and W. R. Jones to junior membership.

REGULAR MEETING, May 19, 1900.—The First Vice-President and later the Second Vice-President in the chair. Forty-three members and six visitors present.

Mr. William Easby, Jr., read a paper on "The Bacterial Treatment of Sewage in England." The subject was discussed by Messrs. Leffmann, Maignen, and Schermerhorn.

Business Meeting, June 2, 1900.—The President in the chair. Fifty-six members and eleven visitors present.

Mr. Henry G. Morris read a paper on the "Pumping-engines of the Philadelphia Waterworks." The subject was discussed by Messrs. d'Auria, Gordon, Codman, Schermerhorn, Nichols, Trautwine, and McBride.

Several lantern slides illustrating actual battle-scenes in the Philippine Islands were exhibited.

A CONVERSATIONAL MEETING was held on May 12. Messrs. James Christie and Edwin F. Smith made remarks upon the engineering features of the proposed Nicaragua Canal, and also references to other proposed isthmian waterways. The subject was discussed in a general way. About twenty members were present at the meeting.

## ABSTRACT OF MINUTES OF THE BOARD OF DIRECTORS.

REGULAR MEETING, April 21, 1900.—Present: The President, the Vice-Presidents, Directors Levis, Souder, Smith, and Christie, and the Secretary.

The Treasurer's report showed:

Upon motion, Messrs. Carl Hering, F. H. Lewis, and Wm. C. L. Eglin were appointed a delegation to represent the Club at a reception of visiting engineers to be held at Paris in June of this year under the auspices of the Society of Civil Engineers of France.

REGULAR MEETING, May 19, 1900.—Present: The Vice-Presidents, Directors Levis, Souder, Smith, and Piez, and the Secretary.

The Treasurer reported:

The Executive Committee presented an amended form of rules for the government of the Board, which was adopted to take effect at once.

An appropriation of \$150.00 was made to the Library Committee for use during the current year.

SPECIAL MEETING, June 2, 1900, called to transact all pending business.—Present: The President, the Vice-Presidents, Directors Levis, Smith, Souder, Christie, and the Secretary.

The Treasurer reported

A communication was received from the Engineering Society of Western New York inclosing photographs of buildings and plans for the Pan-American Exposition to be held at Buffalo in 1901, and asking for suggestions in regard to conventions of engineering societies at that time. Final action upon the communication was postponed for the present.

The Secretary was authorized to notify the members that the Club would undertake to bind Proceedings in a style similar to that used in the Club library for one dollar a volume, payable in advance; also that the Secretary is authorized to sell single copies of any issue of the Proceedings to members to complete their files at ten cents per copy.

# DONATIONS TO GENERAL LIBRARY.

FROM L. G. CARPENTER, FT. COLLINS, COL.

Twelfth Annual Report, 1899, The Agricultural Experiment Station, Ft. Collins, Col.

From F. L. HAND, CHIEF WATER BUREAU, PHILA. Reports, 1895, '96, '97, '98.

FROM U. S. COAST AND GEODETIC SURVEY.

Report, 1897, '98.

FROM SUPERINTENDENT OF DOCUMENTS, WASHINGTON, D. C. Consular Reports, No. 234, March, 1900.

" " " 235, April, 1900.

"Special, Volume XVIII; Merchant Marine of Foreign Countries.
Monthly Summary, Commerce and Finance, January, 1900.

" February, 1900.

National Academy of Sciences, Annual Report, 1899. Water-supply and Irrigation Papers, No. 32.

FROM W. C. HAWLEY, ATLANTIC CITY, N. J. Annual Reports 1, 2, 3, 4, Board of Water Commissioners, Atlantic City, N. J.

FROM METROPOLITAN WATER BOARD.

Fifth Annual Report, January 1, 1900.

FROM UNITED STATES GEOLOGICAL SURVEY.

Nineteenth Annual Report, 1897-'98,' Parts 2, 3, and 5 atlas.

Twentieth Annual Report, 1898-'99, Parts 1, 6, and 6 continued.

Monographs XXXII, Part 2; XXXIII-IV-VI-VII-VIII.

Bulletins 157-58-59-60-61-62.

FROM COMMISSIONERS TOPOGRAPHICAL SURVEY.

Report of Massachusetts and New York Boundary.

FROM MR. KENNETH M. BLAKISTON.

Map of Improved Portion of the Province of Pennsylvania, 1681.

# **PROCEEDINGS**

OF

# THE ENGINEERS' CLUB

OF PHILADELPHIA.

ORGANIZED DECEMBER 17, 1877.

INCORPORATED JUNE 9, 1892.

NOTE.—The Club, as a body, is not responsible for the statements and opinions advanced in its publications.

Vol. XVII.

NOVEMBER, 1900.

No. 4.

# THE WATER-JET AS AN AID TO ENGINEERING CONSTRUCTION.



L. Y. SCHERMERHORN.

Read September 15, 1900.

Some years ago while engaged in using the water-jet, as hereinafter described, I found my right to use the method challenged by parties who had secured a patent upon the water-jet as an aid in pile-driving.

Knowing from tradition, and from experience, that the engineer is often obliged to solve difficulties by the use of appliances which, though they appear novel to him, are not in fact new, I believed that others had probably employed the water-jet for purposes similar to those which led me to its use; and under this strong intuition I believed that the patent was invalid, for the reason that it was not for a new appliance, but rather for one in use in this country some years prior to the application for the patent which had been granted. I accordingly entered upon an investigation of prior use of the water-jet, through an extensive correspondence with engineers in all parts of the country, and by an examination of engineering literature in our libraries.

The results of this investigation were in part subsequently published by the Government for distribution among the officers of the

1

Corps of Engineers, and the attention thus directed to the method resulted in the immediate and extensive use of the water-jet for pile-sinking upon the works under the Mississippi and Missouri River Commissions and elsewhere; and through the success of the method, as there established, it has come into very general use in the West and Northwest, but the method has never received in the East the attention which experience elsewhere indicates that it deserves. I have, therefore, considered that the general subject might with interest and advantage be presented before the Club.

When a sufficiently powerful stream of water, in the form of a jet, is forced into sand, mud, or soft clay, a rapid disintegration and removal of the material ensues when the action of the jet is confined to quite limited areas; and an increased fluidity of the earthy mass with a partial excavation when not so confined. In either case the action of the water-jet facilitates the passage of piles, cylinders, caissons, or similar constructions through earthy material of the character named.

The general action of the water-jet may be illustrated by its operation in sinking ordinary wooden piles. The pile, properly held in position in the leaders of a pile-driver, is lowered upon the bottom, and the water-jet placed in operation close to the lower end of the pile; whereupon the pile, either through its own weight or aided by that of the pile-hammer, lowered upon the head of the pile, rapidly sinks, with the water-jet, into the semifluid mass of sand which the water-jet has produced. All variations in the use of the water-jet for sinking piles are modifications of the action just described.

A compilation of all known applications of the water-jet indicates that its first use arose from the difficulties experienced in obtaining suitable foundations for lighthouses and wharves on the sandy shores of the Gulf and Atlantic Southern States. In several cases the engineering difficulties of the occasion have led to the use of the water-jet without the user being aware of its previous application to similar difficulties. This has led to claims of originality from several independent sources, each person honestly imagining that he was the original discoverer. The earliest determined use of it occurred in 1852, in sinking piles for a wharf and warehouse at Decrow's Point, Matagorda Bay, Tex.; and arose from a suggestion made by Captain Geo. B. McClellan, who was at the time Chief Engineer of the

Department of Texas, and in charge of surveys of rivers and harbors on the coast of Texas.

The method adopted is described by an eye-witness as follows: "In February, 1852, a resident of Decrow's Point was building a wharf and warehouse, and found it difficult to sink the piles in the hard sand bottom. Captain McClellan advised him to get a hand-pump and pump them down; which he did, and it worked finely. The method was as follows: Water was forced through an ordinary rubber hose, with a piece of gas-pipe on the end for a nozle. The nozle was placed close to the point of the pile on the bottom, the jet of water scouring the sand away from the pile and making a hole, in which the pile sank rapidly."

General McClellan stated, in 1879, that the sinking of clams into the sand along the ocean shore, by closing their shells and ejecting the water therefrom in a thin stream, first suggested to him the use of the water-jet as an aid in sinking piles in sand.

In 1854, in sinking piles for the foundation of Pungateague Light, Chesapeake Bay, Mr. Charles Pontez, under direction of Major H. Bache, suggested the use of the water-jet. Mr. Pontez thus describes the method:

"The piles were hollow, of cast-iron, 18 feet long, 7 inches in diameter, with a trumpet-shaped base flaring out to 3 feet in diameter. A 1-inch iron pipe, which passed through the pile, was connected by a hose with a hand force-pump. By this means a pile was sunk 11 feet in two and a half hours; 11 piles were sunk in three days."

Between 1854 and 1861 Lieutenant W. H. Stevens made use of the water-jet for sinking sheet and bearing piles in the construction of jetties for the protection of Fort Livingston, La.; for the sinking of wooden piles for platform, and screw-piles for foundation for a lighthouse at Half-moon Shoals, Matagorda Bay, Tex., and at Ship Shoals, La.; and for sinking wooden piles for the foundation of a wharf and warehouse in connection with the fortifications at Pelican Spit, Galveston Bay, Tex. It has been impossible to obtain the details of the methods of application of the water-jet at the foregoing works; but such details as are obtainable indicate that the water-jet was not attached to the piles.

In 1856 James Brunlee used the water-jet in sinking cast-iron piles for the foundations of the Kent and Leven Viaducts over Morecambe

Bay, England. The piles were hollow, pointed, and provided with a disk near their lower ends. A wrought-iron pipe 2 inches in diameter was carried down the inside of the piles and through the ends to a distance of about 2 feet below the point of the pile. The top of the pipe was connected by a flexible hose with the force-pump. By these appliances the water was forced down the pipe and into the sand, which, being loosened and rendered quite fluid, permitted the easy descent of the piles. The guide-piles forming the approach to the drawbridge were baulks of timber, 14 inches square, fitted with castiron sockets having disks  $2\frac{1}{2}$  feet in diameter. These piles were sunk by the same method as the cast-iron piles, except that the water-jet was carried down the outside of the pile to its point. Since this application of the water-jet by Mr. Brunlee, its use has been quite frequent in the construction of foundations for lighthouses on the coasts of England and France.

In 1862 wooden piles to the number of 5000 were placed by Mr. J. W. Glenn across the channel to Mobile Harbor for the purpose of obstructing the entrance of the Federal fleet. The general details were as follows:

The piles were from 20 to 30 feet in length, with a diameter of from 18 to 30 inches. They were sunk from 12 to 20 feet in the sand, and their tops were cut off a little below the surface of the water. A steam fire-engine placed on the deck of a steamer supplied the necessary force-pump. At the end of about 50 feet of hose an ordinary 1½-inch fire-nozle was placed. At the lower end of the pile two iron staples were driven, in which the nozle was secured while the pile was being sunk. The pump was started and the pile, with the jet attached, lowered to the bottom, into which it quickly sank to the required depth. The hose and nozle were freed by drawing them to the surface before the pump was stopped. The rate of penetration is stated as "about 1 foot per second." The depth of water was about 8 feet; and the bottom is described as being "for a depth of 20 feet a deposit of sand such as is common to the Gulf coast."

In the Gulf States palmetto piles were found to resist effectually the ravages of the teredo; but the wood is too soft to withstand the blows of the pile-driver. By using the water-jet the necessity for the use of the pile-hammer was removed, and palmetto piles became available. This, taken in connection with the favorable results pre-

viously obtained by Lieutenant W. H. Stevens, led to a general use of the water-jet in sinking both round and sheet piles at various points along the Atlantic and Gulf coasts. Application of the principle was made by Major P. C. Hains, in 1872, in the construction of the foundations for Thimble Light, Va., and in 1873 in the construction of range lights at the mouth of the Patapsco River, Md.; by Captain A. N. Damrell, in 1873, in placing piles, for beach protection, at Fort Gaines, Mobile Bay, Ala., and in 1877 for sheet-piling for seawalls at Fort Morgan, Mobile Bay; by Captain C. E. L. B. Davis, in 1874, 1875, and 1877, in the construction of sheet-piling at Galveston Bay, Tex.

In 1867 to 1869, O. Chanute, C. E., Chief Engineer of the Kansas City Bridge, made use of the water-jet in sinking wooden bearing-piles, by passing an iron pipe along the side of the pile and attached thereto, allowing the jet to discharge near the point of the pile. Mr. Chanute also used compound piles, formed by bolting together four square pieces of timber, one corner of each piece having been chamfered, and these chamfered edges placed together, leaving a hole along the axis of the pile through which the jet was forced. The water-jet was used, also, in sinking the caisson for pier No. 4, by arranging jets so as to discharge at the lower edge of the caisson; also by independent jets directed by divers against special points of resistance.

In 1868, T. J. Whitman, C. E., Chief Engineer of the St. Louis Waterworks, made the following application of the water-jet in sinking sheet-piling for the coffer-dam about the foundations of the river engines:

A 2-inch iron pipe was fastened to the side of the pile; the lower end of the pipe was contracted to a \(\frac{3}{4}\)-inch opening. The pipe was bent so as to bring the nozle just to the point of the pile. The pipe was connected with the pump by a 3-inch hose, through which water was forced with the greatest pressure obtainable. A second method of application was to bore a hole from the point of the pile upward (along the axis of the pile) for about two feet, and a second hole from the side of the pile obliquely downward to intersect the first hole. The nozle of the pipe was forced into the oblique hole and the water pumped as before. By this latter method the piles could be sunk much faster than by the first.

Difficulty was found to exist in sinking the piles to the required

depth, the cause of which, Mr. Whitman says, was as follows: "When we excavated for the masonry, the difficulty was made evident. The material was sand mixed with a considerable amount of gravel and quite large stones. The pile would sink readily through the sand and fine gravel, but when it had passed through a certain amount of this material, the gravel collected in a pocket about the foot of the pile and allowed the water to escape without displacing the material, so that the pile would sink no further." The author had a similar experience with the water-jet in sinking sheet-piling through sand containing quite a large percentage of coarse gravel and small stones: subsequent excavation developing a mass of small stones accumulated at the lower ends of the sheet-piles, which had been collected by the water-jet in its downward passage through the gravelly sand.

In 1870, E. D. Mason, C. E., Chief Engineer of the Hannibal Bridge, Mo., used the water-jet to clear away the sand from the piles so that they could be cut off below the river bottom; also generally to remove deposits from about the foundations.

In 1871, Captain M. R. Brown, under direction of Lieutenant-Colonel J. D. Kurtz, made a valuable application of the water-jet in sinking the iron screw-piles used in the construction of the pier at Lewes, Del. The piles consisted of solid wrought-iron shafts, from 5½ to 8½ inches in diameter, provided with cast-iron screws from 2 to 2½ feet in diameter. In attempting to screw the piles down they broke, from the extreme resistance of the material into which they were forced, before they had attained the necessary depth. An attempt was made to reduce the resistance by leading a jet of water to the material underneath the flanges of the screw; but the prevalence of gravel and the insufficient force of the pump gave unsatisfactory An examination of a broken screw led to the conclusion that the greatest resistance encountered is on the upper surfaces of the screw-flanges, and is doubtless due to the friction caused by the direct weight of the superimposed cone of sand and to the opposition of a component of this weight to the motion of the screw-flanges.

It was thought that should a jet of water be forced on the upper surfaces of the screw-flanges it would accomplish the more complete liquidity of the sand above the screw, and change the volume of pressure on the flanges from that of an inverted cone to that of a cylinder the diameter of which would be equal to that of the smaller

face of the frustum. Streams of water through two 11-inch iron pipes were led directly upon the upper surfaces of the screw-flanges, and the hitherto great resistance to screwing down the piles at once ceased. A subsequent determination of resistances to screwing down the piles developed the fact that nine-tenths of the resistance disappeared upon the proper application of the water-jet to the upper surfaces of the screw-flanges. Through the aid of this application of the water-jet it became possible "to settle the screw-piles as deeply as was deemed necessary in a bottom where, without the jet, the strongest iron screws were broken as though they had been of glass, when main force alone was used in an unsuccessful effort to sink them more than 4 feet." From the experience gained on this work it was inferred that with the aid of the jet there would be no great difficulty in penetrating to a depth of 20 feet, since the last foot of work in penetrating 12 feet was accomplished, seemingly, as easily as the first foot of the same stratum. Subsequently, when it became necessary to remove some of the piles, the application of the water-jet to the upper face of the screw rendered its removal quite easy, when previous efforts by backing the screw or raising the pile bodily had proved unsuccessful.

In 1873, C. C. Martin, C. E., Superintending Engineer of the New York and Brooklyn Bridge, made the following application of the water-jet in placing sheet-piling: The sheet-planks were 8 by 2 inches, and it was found that from 30 to 40 blows were required to drive a plank 1 inch. It was then concluded that the water-jet might aid the descent of the sheet-plank. A \(\frac{2}{4}\)-inch hose was attached to a \(\frac{2}{4}\)-inch iron pipe about 3 feet in length. This pipe was introduced along the side of the sheet-plank, and the water from a city hydrant—with a pressure of about 50 pounds per square inch—was turned on; this loosened the sand, and the pile was driven easily. The following comparative results will show the effective action of the water-jet: A sheet-plank without the aid of the jet required 392 blows to drive the plank 10 inches in eighteen minutes; while by the aid of the jet another plank, similarly placed, required 93 blows to drive the plank 17\(\frac{1}{2}\) inches in two minutes.

In 1874, G. Jordan, C. E., in the construction of the piers for a bridge over the Tensas River, Ala., made use of large iron cylinders, from 4 to 6 feet in diameter, which were sunk to the required depth by the aid of a series of jets applied concentrically with the inner

sides of the cylinders, and discharging from vertical pipes at the lower edge of the cylinders.

In 1875, Mr. C. Fitzsimmons applied the water-jet to facilitate the sinking of the shafts of the Fullerton Avenue conduit, Chicago. The brick-work was built on an iron shoe and sunk from the surface of the ground; at times the pressure of the sand against the sides of the shaft was so great as to prevent its sinking. The application of the water-jet along the sides of the shaft diminished the resistance and greatly facilitated its descent.

In 1877, Messrs. Stocklin & Vetelart, contractors for the enlargement of Calais Harbor, France, used the water-jet in combination with an ordinary pile-driver under the following circumstances: Guide-piles 9 inches square and placed 6½ feet apart were driven 10 feet into the bottom; between the guide-piles sheathing planks, 4 inches thick, were driven to a depth of 8 feet. The pile-driver ram weighed 1200 pounds and could be given a fall of 6 feet. The water was injected from two pipes, one on each side of the pile, their orifices being about one foot below the point of the pile. The pipes were kept as nearly vertical as possible and in constant motion. Without the aid of the jet 185 blows were required to drive a guide-pile 10 feet, and 900 blows were required to drive a panel (6½ feet) of sheetplank to a depth of 8 feet. The time required for pitching and driving a panel was eight hours and thirty-six minutes. By the aid of the water-jet the number of blows required for a panel was from 0 to 50, and the time one hour and nine minutes. The system was said to have the additional advantage of permitting the sheathing to be placed much closer and in better alinement than could be done by the hammer alone.

At many of the harbors on the Great Lakes the piers, extending from the shore-line to about the 12-foot curve, consist of two parallel rows of round piles, 14 feet apart. The piles of each row are driven quite closely together, cut off at the surface of the water, and surmounted by a timber superstructure about 5 feet in height. The filling of these piers consists of brush, slabs, and stone. Experience demonstrates that such piers readily permit the passage of sand through them from the outside into the channel between the piers, rendering necessary some subsequent device to make them sand-tight. The harbors at Two Rivers, Ahnapee, and Sturgeon Bay, Lake Michigan,

were formed in part by piers constructed as just described. In 1878, Major H. M. Robert, whose district embraced the harbors mentioned, after a careful examination of possible expedients for rendering them sand-tight, decided to place close sheet-piling along the side of the pile-piers, and the duty of determining the best method for driving this sheet-piling, so as to secure the objects sought, was assigned to me; and without knowledge of the prior use of the water-jet for such purposes I decided to try it upon the work in hand. The work was begun in the fall of 1878 and continued during the seasons of 1879 and 1880. The amount of pile-pier revetted with sheet-piling by the use of the water-jet was nearly 4100 linear feet, and it is believed that the methods adopted and the results obtained justify detailed description. The general method of construction was as follows: The sheet-pile revetment consisted of a double row of planks, each 3 inches in thickness, 12 inches in width, and 18 feet in length; the planks breaking joints with one another and extending from the top of the superstructure to 13 feet below the water-surface; secured to the pilepier by an oak wale 6 by 12 inches, placed at the water-surface, and a pine wale 8 by 12 inches, along the top of the superstructure; the wales were attached to the timber-work of the superstructure by 13inch screw-bolts. The sheet-piling was generally placed along the harbor side of the piers. The general depth of water along the piers was from 2 to 11 feet, so that the plank was sunk from 11 to 2 feet into the lake bottom; the material into which the sheet-piling was driven was generally sand; in a few instances small quantities of clay or gravel occurred. Since the object of the sheet-pile revetment was to render the piers impervious to sand, it was of the first importance that the sheet-piles should be in intimate contact, and free from the openings which occur in sheet-piling placed by the usual methods. It was considered that the water-jet furnished a method for placing the sheet-piles so that they would be practically sand-tight; the results accomplished justified these anticipations. The work at first undertaken was to a certain extent tentative, but, as it progressed, experience indicated modifications of the original conception, which grew into the methods from which the best results were obtained.

The plant consisted of a vertical tubular boiler, with an attached engine having an 8-by-12-inch cylinder, and giving about 130 revolutions per minute to a 42-inch driving-wheel. A No. 4 Holly rotary

pump, with an 18-inch pulley, was attached by a belt to the drivingwheel of the engine, giving about 300 revolutions per minute to the pump. The rotary pump was selected for the following reasons:

- 1. Its small cost when compared with a direct-acting steam-pump of equal capacity.
- 2. The action of the jet surcharged the water in the vicinity of the pump suction with sand; this would have proved highly destructive to the cylinders of a direct-acting pump, or else would have rendered necessary a troublesome method of compensation.

The rotary pump, by an easy and permanent device, allows for the wear incident to the use of sandy water. The pump was supplied with a 4-inch suction, and discharged through a 3-inch hose about 50 feet in length. The hose was provided with a nozle 3 feet in length and 2 inches in diameter.

The engine was provided with a hoisting drum capable of giving motion to an 1800-pound hammer, moving in the leaders 24 feet in height. The boiler, engine, pump, and pile-driver were mounted on a platform 12 feet wide and 24 feet in length, carried on wooden rollers, which admitted of its being readily moved backward or forward along the top of the pier as occasion required. From the main platform a smaller platform, about 6 feet wide and 10 feet long, was suspended so as to be about one foot above the water-surface, allowing ready access to the face of the pier.

The previously described nozle was securely attached to the end of a pole about 2 inches in diameter and 18 feet in length; the pole being used to guide the jet into place and to force it into the sand. Ordinarily the weight of a man, standing upon the top of the sheet-pile, was sufficient to force the pile entirely down into place, though sometimes it was necessary for one of the men on the suspended platform to assist him by pressing on the head of the sheet-pile with a handspike or lever.

The jet became almost powerless when required to force its way through drift-wood, chips, sunken logs, or stone; and, since such obstructions generally existed along the side of the piers, it was found necessary to remove them by dredging a narrow cut close to the pier. No effort was made to utilize the increased depth of water obtainable immediately after dredging, since, in sand clear of obstructions, such

as are mentioned above, the jet permits the placing of the sheet-plank in 8 feet of sand as readily as in a lesser depth.

The sheet-piles did not generally require sharpening; experience developing the fact that the piles were placed neither more rapidly nor in better position by being sharpened. The pile-hammer previously described was seldom used—not more than one plank in a hundred requiring its assistance. This adds largely to the value of the water-jet, since in driving sheet-piles through sand by the hammer, oak, or timber equally capable of resisting the destructive effect of impact, would be required; by using the water-jet the necessity for the hammer is removed, and pine timber can be substituted for oak, reducing thereby the cost of the timber item about one-half.

In 1880 an application of the water-jet was made by C. Macdonald, C. E., president of the Delaware Bridge Company, in building the iron ocean-pier at Coney Island. The following brief description of the methods used and results obtained is of interest. The pier was built to furnish means of landing from steamers and to afford increased facilities for promenades at Coney Island beach. The pier was supported on hollow wrought-iron piles 8\frac{1}{2} inches outside diameter, metal \frac{1}{2} inch in thickness. The bases of the piles were provided with cast-iron disks 2 feet in diameter and 9 inches deep, through which was an opening 2 inches in diameter for the passage of the water-jet. The piles were sunk from 10 to 17 feet into the sand:

"In the operation of sinking the piles the water-jet was applied through a pipe 1½ inches in diameter, extending through the pile and disk, and about 2 inches beyond. The pumping-plant consisted of a Worthington pump with a steam-cylinder 12 by 8½ inches, and a water-cylinder 8½ by 7½ inches. Also a No. 6 Cameron pump with a 10-by-9-inch steam- and a 10-by-6-inch water-cylinder. The suction-pipes were 4 inches in diameter and the discharging hose was 3 inches in diameter. The boiler was upright, 42 inches in diameter, 8 feet high, and containing 62 tubes 2 inches in diameter.

"With the appliances described it was found that piles could be driven in clear sand at the rate of 3 feet per minute to a depth of 12 feet; after that the rate of progress gradually diminished until at 18 feet a limit was reached beyond which it was impracticable to go without considerable loss of time.

"A few disks 2½ feet in diameter were tried, but much more time

was required in sinking them. One 3-foot disk caused a delay of six hours in sinking 15 feet through very uniform sand."

The experiment was made—late in the progress of the work—of forcing the water directly through the pile instead of through the inner pipe, previously referred to; so that the water from the pump was discharged from the bottom of the pile through a 2-inch opening. "In this case the pile sank much more rapidly than before," and the pressure on the hose indicated that the resistance to discharge was materially reduced.

Upon one or two occasions it became necessary to raise piles which, by mistake, had been driven to a greater depth than required and allowed to become firmly settled. This was accomplished by passing a jet down and around the outside of the pile until the disk was reached, when the pile was easily raised by the blocks attached to the hoisting engine, and finally secured at the proper level.

The limit of safe loading for piles of this character has been assumed to be 5 tons per square foot of disk. Many of these piles sustain a load, due to structure alone, of 6.3 tons per square foot of disk; to this must be added the weight of masses of people and exceptional local loads, which have, in some cases, increased the pressure upon the disk to 8 tons per square foot, without causing any settlement which can be detected by the eye. This extreme practice is not recommended where absolute rigidity of foundation is required.

It frequently happened that the pile would bring up on some tenacious material, which was assumed to be clay, and through which the jet unaided could not be made to force a passage. In such cases it was found that by raising the pile about 6 inches and allowing it to drop suddenly, with the jet still in operation, and repeating as rapidly as possible, the obstruction was finally overcome; although in some instances five or six hours were consumed in sinking as many feet. The deposits thus retarding the action of the jet were assumed to be clay pockets.

"The wooden piles around the pier-head were driven by a water-jet; the  $1\frac{1}{2}$ -inch tube, previously used for the iron piles, was lashed to the side of the wooden pile at the top, and held in place at the bottom by cleats nailed to the sides of the piles. It was not found necessary to curve the pipe so as to bring the jet under the center of

the piles. They did not manifest any tendency to work over to the side on which the tube was secured. These piles were of pine oak and were settled to a depth of 12 feet without the aid of a hammer; but much time would be saved by the use of a regular pile-driver in connection with the water-jet where lighter piles are used or greater depths required."

In the improvement of the Mississippi and Missouri Rivers large numbers of piles have been driven for the construction of the brushand pile-dikes, and in the sinking of these piles the water-jet has been in use since 1881. A great variety of experiments were undertaken upon this work to establish the best details for the use of the jet; this experience demonstrated certain fundamental principles as contributing essentially to the best results, prominent among which were the following:

That the water-jet can not be relied upon to give satisfactory results in material containing a large percentage of gravel; that it should be capable of such concentration of its force as will permit the stream to be delivered through a nozle not more than 1½ inches in diameter, and frequently somewhat less, and with pump power capable of giving a nozle-pressure of from 75 to 150 pounds per square inch; that in sand free from gravel the best results are obtained with the larger nozle and reduced pressure, while the presence of gravel required the smaller nozle and higher pressure.

Generally, upon the work at the localities referred to, the wroughtiron pipe connecting the nozle with the hose was attached to the side
of the pile by two light staples, the lower one about 2 feet above the
point of the pile, and the upper staple near the top of the pile, with
the nozle of the jet, which was simply a short piece of pipe, projecting
from 6 inches to 1 foot below the point of the pile. After the pile
was in place the jet-pipe and attached nozle were detached from the
pile by forcibly withdrawing the pipe from the staples by a light
block and fall. In some cases the jet-pipe was not attached to the
pile, but was worked up and down alongside of the pile as it
descended.

It was found that the turning and shaking of the pile facilitated its descent; when this failed, the pile-hammer was lowered upon the pile, and either under its weight, or by light blows with about a 2-foot fall, the pile was driven to its final penetration. Upon the work

under consideration the piles were generally driven butts down, and were very bluntly sharpened, if at all. These piles were subjected to severe lateral strain by the currents, and therefore the butt ends were driven for the purpose of giving the pile the greatest possible diameter where it entered the ground.

An engineer upon this work states that the piles were usually driven from 13 to 20 feet into the river-bed, and that the actual time of driving was about four minutes each, though not more than half of this time was required when the resistances to the pile were small; the first 10 feet being frequently driven in less than one minute. In a short time after the piles had been sunk the sand settled firmly around them, and they became as securely fixed as though driven by a drop-hammer.

Various suggestions and experiments have been made relative to securing the action of the water-jet on a line coincident with the vertical axis of the pile, and while such efforts have been ingenious, experience has demonstrated that they did not secure greater efficiency than that obtained by placing the jet alongside of the pile in the manner previously described.

It is not to be assumed that the water-jet is the best method to be adopted in all, or even a majority of, cases where piles are to be driven; but in suitable soils it may properly supplement the ordinary method, with marked advantage. With piles which are required to carry considerable vertical loads the action of the hammer should be relied upon to determine the ultimate refusal of the pile. The water-jet permits the piles to be placed with more exactness as to position than the ordinary method; and in driving sheet-piling an intimate contact between the several piles can be secured. This can not be secured by the ordinary method in driving sheet-piling in sandy soils.

In driving piles into or through heavy material underlying a considerable depth of sand the use of the water-jet will temporarily remove the frictional resistance of that part of the pile passing through the sand, and thereby permit the hammer to concentrate its work upon the penetration of the pile into the heavy material below the sand, when without the use of the jet this frictional resistance of the sand would cause the pile to declare refusal at a less depth of penetration into the lower stratum of heavy material.

Again, the use of the water-jet largely removes the destructive

effect of the hammer-blows upon the material of the pile, and leaves its fiber in a better condition to resist both stress and decay. For the same reason it permits the use of piles of soft wood, where otherwise hard-wood piles would be required to withstand the hammer-blows in heavy driving; this frequently is a marked economy in the cost of the work.

The injury of piles by excessive or improper driving deserves passing notice. My conclusion, from quite a large experience, is that more piles are dangerously injured by overdriving or improper driving from excessive weights of hammer and undue heights of falls than are rendered unsafe through insufficient driving. The usual practice is to fix upon the increment of movement of the pile under the final blows of the hammer, and then to intrust the determination of the question of when to cease driving to the judgment of an inexperienced inspector; and too frequently, in the judgment of parties most in interest, almost any one can superintend pile-driving. is a grave error; for large experience in the details of pile-driving, joined with rather an unusual amount of common sense, care, observation, and judgment, are the essential requisites of one to whom is intrusted the duty of a proper supervision of such work. The brooming of piles at their points or the crushing of the heads is often accepted as evidence of penetration, and the driving is persevered in until the pile is either broken or seriously impaired in strength.

The general principle upon which the efficiency of the jet in sinking piles depends is the increased fluidity given to the material into which the piles are sunk. The actual displacement of material is small, and for this reason the engine, pump, hose, and nozle should be arranged to deliver large quantities of water with a moderate force, rather than small quantities with high initial velocity. In gravel, or in sand containing considerable gravel, some benefit might result from a high and concentrated velocity, sufficient to displace absolutely the pebbles and to drive them from the vicinity of the pile; but it is evident that any practicable velocity would be powerless in gravel except for a very limited depth or when circumstances favored the prompt removal of the pebbles.

The error most frequently made in the application of the water-jet is the insufficient capacity of the pumps employed. In almost every application referred to in the early history of pile-driving by the aid

of the jet the efficiency of the method would have been largely increased if the pumps and hose had been of much greater capacity. It is also highly probable that the rude iron nozles generally used could, with advantage, be replaced by nozles constructed and proportioned so as to give as nearly as possible perfect contraction to the fluid vein.

The water-jet also finds a valuable application in making borings through earthy materials to determine their character and extent, but the limitations of the method are determined by the character of the material. In mud, sand, or soft clay, or in mixtures of these, the water-jet quickly forces its way through; while in hard clay, heavy gravel, or boulders its efficiency is small. In the softer class of materials named the writer has carried borings to a depth of 90 feet, and the descent of the jet was accomplished nearly as rapidly as the successive lengths of pipe could be screwed together. In sand or soft clay the rate of penetration would be slower and more limited in extent.

In borings through sand in which gravel either occurs in layers or mixed with the sand the water-jet should be used inside of a second pipe, which is forced down evenly with the jet. In this manner a jet through a 1½-inch gas-pipe carried inside of a 2½-inch pipe will force the sand, clay, and small stones upward through the larger pipe, and so permit its passage downward. Stones too large to be lifted in the outer pipe will finally collect at the bottom of the hole and arrest the descent of the outer pipe. In such a case they may be removed by an auger inserted in the larger pipe after the withdrawal of the jet, or they may be forced aside by the insertion of chisel-shaped drills, after which the forcing down of the larger pipe may be continued by the water-jet. By this method borings have been carried through 75 feet of the material described.

Upon five of the hydraulic dredges recently built by the Government for the improvement of the Mississippi River the water-jet is efficiently used for the purpose of stirring the sand to be removed, and thereby more readily bringing the material under the influence of the powerful suction and discharge pipes, which finally carry away the sand mixed with water. These dredges will form a cut 35 to 40 feet wide, and in some cases 6 feet deep, by the continuous forward movement of the dredge; removing at the rate of 4000 cubic yards or more of sand per hour.

Upon these dredges the agitation of the material so as to bring it within the influence of the suction pipes is accomplished by a series of water-jets, from  $2\frac{1}{2}$  to 3 inches in diameter at the nozle ends, under a moderate pressure of from 10 to 15 pounds per square inch. In the first use of the water-jet upon these dredges smaller nozles in greater number, and with pressures of 100 pounds per square inch, were used; but the results from these were not so satisfactory as those obtained from larger nozles with moderate pressure.

The pumps supplying water for these jets are of the centrifugal type, on account mainly of the excessive wear which would result to the water-cylinders of direct-acting steam-pumps from the water being surcharged with sand. The action of these jets is superficial and the sand is easily lifted; therefore the nozle pressures are low. This method of stirring the material to be removed by hydraulic dredges, through the action of the water-jet, has been found to be more efficient upon the sands of the Mississippi River than the action of mechanical agitators.

The use in California of the water-jet in hydraulic mining may be referred to as the most powerful application of the method. In the enormous deposits of clay, sand, gravel, and boulders found in the upper parts of the glacial valleys of California, gold occurs in quantities which make the detritus profitable if the material can be worked in large quantities at a very low cost. To accomplish this, water is brought in closed conduits from elevations, in some cases hundreds of feet above the material from which the gold is to be extracted, and through powerful jets directed against the gravel banks the material is broken up and conveyed through sluices to the dumps; the gold being collected in the sluices.

The nozles of the larger jets are from 8 to 9 inches in diameter, discharging with a velocity of from 150 to 175 feet per second, and carrying from 1,500,000 to 2,000,000 gallons of water per hour. The force of these jets is sufficient to break up and wash away any material except solid rock and very large boulders.

The grades of the sluices which carry the gravel away from jets vary with the nature of the ground, but in those of an average grade 2250 cubic feet of water will carry 14,000 pounds of gravel, or about 10 per cent. of the weight of the water. The grade of these sluices varies from about 3½ per cent. to 7 per cent. On the Yuba River

alone it was estimated that in 1880 about 19,400,000 cubic yards of gravel were handled per year.

By this application of the water-jet it is considered that hydraulic mining can be carried on at a fair profit when the material yields as low an average as three or four cents per cubic yard of material handled.

A modified application of the foregoing is the use of the water-jet in hydraulic grading. On the Mississippi and Missouri Rivers it became necessary, at points, to prevent the banks from caving and thereby contributing large volumes of material for the formation of This protection was obtained by grading the banks, at necessary localities, to a slope of 1 on 2, or 1 on 3, from their tops to lowwater line, and protecting the slope by woven brush mattresses firmly attached to the slopes.

In some cases these banks were quite heavily timbered, and 15 to 20 feet high, composed of layers of black soil overlaying strata of clay, loam, or sand varying from 3 to 8 feet in thickness. hydraulic grading was accomplished by beginning at the top of the slope and carrying to the water-line successive parts of the bank. The water-jet was supplied with a suitable pump discharging through a 5or 6-inch pipe connected with a flexible hose, and a water-jet with a nozle about  $1\frac{5}{16}$  inches in diameter; the nozle-pressures were from 75 to 80 pounds per square inch.

Under favorable conditions 6000 cubic yards of material were handled in a day of twelve hours. In one case 7000 linear feet of bank, containing about 100,000 cubic yards of material, were graded at a cost of  $1_{T0}$  cents per cubic yard; in another case the cost of handling about an equal quantity of material was  $1\frac{2}{10}$  cents per cubic yard. The same grading, when done by shovels and scrapers, cost from 10 to 12 cents per cubic yard.

In this resume of the application of the water-jet to the work of the engineer, the effort has not been made to collate all known applications, except in the history of its early development, but simply to refer to typical cases in which its use has been followed by satisfactory results.

Apart from the possible value of suggestions herein contained to members of the Club who are not familiar with all these applications of the water-jet, this paper may serve to place on record interesting data relating to the early history of this engineering appliance; and with these ends in view this paper is submitted.

### DISCUSSION.

GEORGE C. DAVIS.—I have seen recently a notice of the use of the waterjet for sinking a ship's anchor. I wish to ask if Mr. Schermerhorn has any knowledge of that application?

Mr. Schermerhorn.—I know of the application of the water-jet for sinking mushroom anchors for the purpose of harbor anchorage. At Daiquiri Bay, on the south coast of Cuba,—twenty-five miles east of Santiago,—some years ago it was necessary to furnish heavy moorings outside of the ore dock. They used very large anchors, the mushroom being 8 feet in diameter. These were sunk by the water-jet discharging through the shank of the mushroom, whereby the mushroom was sunk into the mud to a depth of from 14 to 16 feet. I have known of the sinking of anchors for channel buoys by a similar method. I referred to the overdriving of piles, and I thought that the subject would bring out remarks from some of the members present. I made a rather bold statement when I said that more piles suffered from overdriving than underdriving, and I am inclined to think that this experience is not entirely confined to myself. In talking with engineers who have had large experience in the use of piles I find that they sympathize with me in what I call overdriving of the piles. I have more than once watched piles being driven under a hammer of 3500 pounds, and in this city I have seen such a hammer drop 60 feet on top of a pile which was practically at refusal. When the pile moved, it went by breaking. The foreman of the pile-driver knew very well that he had encountered no soft layer of material. If the majority of experienced foremen of pile-drivers could give their opinions on the subject, they would state that in their experience in driving piles in hard bottom they are quite frequently forced to continue the driving until they know they have broken the piles at some point above the bottom, and that point may not be many feet below the surface. I once saw driving for a very important foundation, where I felt perfectly sure that nearly every pile was broken before the inspector accepted it as having been driven to refusal. In some cases those piles were doubtless broken twice, and even three times, by successive slabbing of the piles. That is a vicious practice, and it arises from lack of experience on the part of the inspector. As I said before, many engineers believe that almost any one can stand by and determine when the driving should stop, noting refusal, or the amount the pile sinks, by the last few blows of the hammer and simply applying the rule of the specifications and insisting upon its being done, absolutely ruining the object for which the piles are supplied.

James Christie.—Will Mr. Schermerhorn please define the nature of injury to piles resulting from excessive driving? Is it the brooming of the head of the pile, or the breaking of the body, or injurious disintegration of the whole fibrous structure? Also, what are the comparative merits of light hammers with a high fall, and heavy hammers with a low fall? I can readily see how the light ham-

mer would bruise and destroy the head of the pile sooner than the heavy hammer would, with equal penetration; whereas the heavy hammer might be more injurious than the light one, on the whole fibrous structure throughout the body of the pile. A condition sometimes occurs when excessive driving is not beneficial: that is, when the pile passes through a hard upper stratum into a comparatively softer material below. It sometimes happens that it is decidedly better to cease driving before this soft stratum is reached and reduces the resistance to penetration of the pile. It is interesting to learn how long the water-jet has been applied to the purpose described. It is probably another instance of the aptness of Sydney Smith's complaint against "those confounded ancients," and it is also another illustration of how frequently man is indebted for valuable suggestions to the humblest forms of animal life.

Mr. Schermerhorn.—I think it is generally admitted by those who have carefully studied the question of pile-driving that low falls with heavy hammers are preferable to high falls with light hammers, both as being less destructive to the pile and giving better results in the end. Major Saunders, an engineering officer who was engaged upon the foundation of Fort Delaware many years ago, made a very elaborate series of observations upon piles driven to known depths, with different weights of hammer and height of fall, and his conclusion was in favor of low falls with heavy hammers as giving a greater degree of stability to the pile, with less injury to the pile than excessive heights with light hammers. We very frequently remove old pile piers, and, along the river front of Philadelphia, as you probably know, after passing through a depth of from 20 to 30 or 40 feet of mud, we encounter a very hard bottom. After the piles have passed through this soft material they may be driven 5 or 6 feet into that material, but no further. When we remove these old piles, in nearly every instance we find that they have very peculiar points, or ends. They have been driven down to this hard material and the pile has split and broomed until it looks like an inverted umbrella 3 or 4 feet in diameter. The inspector or foreman who drove such piles continued to drive for 5 or 6 feet after he should have stopped; and his penetration, or supposed penetration, was simply the brooming or splitting of the pile. We very seldom remove piles from these old piers, where there is a hard bottom, without finding the points of the piles injured for from 2 to 5 feet —absolutely driven to pieces. Such driving was to the manifest injury of those piles.

Mr. Christie.—Mr. Codman just called my attention to the case of a chimney erected in Chicago recently. It is from 230 to 240 feet high, weighs about 9,000,000 pounds, and is built on a base 8 feet thick and 40 feet square, carried on forty piles, the piles being driven down to rock. If the ends broomed and split, as Mr. Schermerhorn described, I wonder whether it is going to stand or fall.

THE CHAIRMAN (Henry Leffmann).—It would be interesting, perhaps, if Mr. Schermerhorn would tell us how far this overdriving has affected the general character of the piling in Philadelphia. For instance, is the durability affected or is the injury to the pile limited to the terminal portion? As Mr. Christie has said, the overdriving may not only affect the point of the pile, but also produce

a splitting in a longitudinal direction. One would expect that such heavy blows would disintegrate part of the structure and diminish the strength of the pile, and also, perhaps, its resistance to the ordinary decomposing influences, for the influence of the water, while not very serious in many cases, yet must be, in part at least, dependent upon the structure of the wood. If the pile is shattered and its fabric broken, it would be expected to be more likely to succumb to ordinary influences. It might be well for Mr. Schermerhorn to tell us if the removals have shown such conditions. Not the least interesting part of the paper has been the suggestion that the original employment of this method was due to observing the habits of an animal. Much may be learned, undoubtedly, by the observation of the methods of animals. Not enough study has been given to this in engineering work as well as in other departments of practical life. We also notice the rather amusing feature that the clam has been the means of suggestion.

Mr. Schermerhorn.—The piling which we are called upon to remove from time to time is generally along the water front. Below low-water mark the pile is practically imperishable, and it would be very difficult to say from observation whether the pile had been seriously injured by overdriving, but I have a strong feeling that the life of the pile is very seriously interfered with by this overdriving to which I refer. While excessive driving may not always produce checks or splits, it has so shaken the fiber that that portion which is above the surface of the water and subject to decay would give way to the effects of the atmosphere and temperature much more rapidly than though it had not been so injured. We know from experience that the driving of spikes into ship timber very seriously injures the vitality of that timber, when the ship's carpenter, in driving the spike home, injures the surface of the wood around the spike, and the same principle holds true of the piles referred to. It is not infrequent, also, when mooring piles have been cut off well below the top of the pile,—which was broomed,—to find that the piles are very seriously checked, and I am not inclined to believe that these are all season checks. I think that many are due to a disorganization of the fiber in the material owing to excessive driving. is a point that the Chairman has raised, as to the duration of timber in our fresh Of course, below the water there is no decay, so far as our records go. There are piles in the vicinity of Reedy Island placed there in 1804. Those piles are projecting 2 or 3 feet above low water, the tops of the piles being very much worn and jammed by the action of the ice, but the timber is practically sound to-Quite frequently in the tearing down of piers we remove timber which I have every reason to believe has been in place over a hundred years, and other than being waterlogged, the timber is sound. The opinion along the river front is that timber is practically imperishable to a point about 3 feet above low water, or about half-tide. It is seldom necessary to replace timber from low water to a point 3 feet above low water. At the top of the structure it will decay with more or less rapidity. Usually from eight to twelve years will finish the life of most timber in the upper part of a pier; but from half-tide down to the surface of low water, and below, the timber is practically imperishable.

HENRY M. CHANCE.—Other instances of the use of the water-jet may be recorded, as in the mining of ore in Alabama, where the washing away of the clayey matrix is sometimes done with the water-jet. The iron ore may consist of perhaps 10 per cent. of the deposit, and they wash away the clayey material and leave the iron ore in place, that material being too heavy to move readily in a sluice. Another instance is found in the anthracite regions in the rehandling of the large culm dumps for the recovery of the small coal that formerly was rejected as worthless. This material is very generally being handled by the water-jet, and at very low cost. It is thus flushed from the dump to the washer.

WM. COPELAND FURBER.—While Mr. Schermerhorn has pointed out fully the evil of overdriving due to the lack of knowledge of the material into which the pile is being driven on the part of the inspector, I think a word of caution may be said on the question of insufficient driving. It is important to know what kind of material is under the pile, and to this end, if many piles are to be driven, borings are requisite. A pile may show considerable resistance while being driven through a comparatively thin layer of hard material, and after penetrating it may show much less resistance. If my information is correct, the original piles for the west abutment of the South Street bridge were driven into a layer of hard pan, which was underlaid, as was subsequently discovered, by a stratum of soft material. The piles were in many instances driven through, or nearly through, the hard pan; on these the abutment was built. In the course of time water, finding its way along the skin of the pile, lubricated it, and the pile was pushed through into the soft stratum below and the structure failed. Had borings been taken before the piles were driven, the inspector could have determined the depth to which the piles should have been driven to be safe, and would not have been compelled to rely alone on the resistance of the pile to further driving.

J. KAY LITTLE.—In every important case soundings should be made; then the engineer would have some data—the strata of clay, gravel, rock, etc.—to assist him in judging the depth to which the piles should be driven in order to secure a proper foundation. I had charge of rebuilding the west approach of the South Street bridge. From observations made at the time the old foundations were removed, I formed the opinion that the piles used were insufficient in number and character to sustain the weight imposed. Oak piles, 12 inches in diameter at the smaller end and 18 inches at the head, were used in the new foundations.

MR. FURBER.—Mr. Schermerhorn has given us much information on the subject of pile-driving this evening. I would like to ask him whether he believes in pointing a pile or in leaving them blunt.

MR. SCHERMERHORN.—Piles should be pointed when driven through other than very soft material; though I am in favor of the driving of unpointed piles through soft material to a very hard bottom. I do not believe in the penetration of piles, to any great extent, into what is called very hard material. In such material as would be designated heavy gravel and boulders, the driving would not exceed 4 or 5 feet, and in sand and gravel, it would generally be not more than from 6 to 8 feet. I never expect to get greater penetration from the

use of an iron shoe, but I would point the pile, and a correct pointing of the pile has much to do with its proper driving. The pile should be bluntly pointed, with four faces cut down to a point 1½ or 2 inches square—not a long taper. It should be strong and capable of resisting great forces. We have many piles in our piers which are carrying loads of from 30 to 40 tons, and the piles are not more than 5 inches at the point and from 12 to 14 at the butt—probably not averaging 12 inches where the piles are cut off, and probably 8 inches where they enter the ground. In some cases the distance between the top of the pile and the point where it enters the ground is 40 feet.

THE CHAIRMAN.—It may be worth while noting that, in the first place, the wearing power of water is almost wholly due to the suspended matter. states that water without suspended matter has practically no wearing power. The constant dropping that wears away the stone is a function of the turbidity of the water. It might be practicable to employ water containing a considerable amount of rather heavy suspended matter. It is also worth noting that the tendency in modern engineering has been in many directions from low pressures The earlier steam-engines were condensing engines; the modern engine is worked at high pressure. The earlier applications of electricity were at low pressure, but many of them are now at high pressure. The economy of high pressure is evident in many operations. The reference to the economy of the operation of the gold-bearing soils is interesting in connection with the fact that this city is said to have a clay which contains a small amount of gold. recollection is that this amount is about three cents to the cubic yard. I understood Mr. Schermerhorn to say that that amount could be profitably worked. so, we may some day make this city a gold-bearing district.

# TRANSMISSION OF GAS AND AIR THROUGH PIPES AND THE TRANSMISSION OF POWER BY COMPRESSED AIR.

#### FREDERICK W. GORDON.

Read October 6, 1900.

Transmission of power by compressed air involves compression, transmission, and expansion, which will be taken up in this order.

In a paper read before the American Society of Mechanical Engineers, May, 1899, the writer illustrated and described a compressor and the indicator cards taken therefrom at various pressures and speeds. The mechanical efficiency was 87.91 per cent. and the volumetric 98.6 per cent. This compressor was 14" diameter and 30" stroke, set tandem to a  $12'' \times 30''$  Corliss engine. The inlet and discharge valve drawings and cards are reproduced in order that the plausibility of these high claims may be appreciated.

Figure 1 shows the inlet valves, consisting of two 3" piston-valves moving in opposite directions, and thereby balanced in pressure and current. They are operated by a wrist plate with lost motion in the connection, and the action is such that the valves open when the air compressed in the clearance is expanded to the pressure of the supply (in this case, atmospheric pressure), and attain a full opening when the piston has traveled four-tenths of the stroke, then remain at rest until the piston has reached seven-eighths of the stroke, and close at dead center.

Figure 2 shows the outlet valve, 4" diameter, closed to line and line at dead center by eccentric action and opening when the pressure above the supply in the cylinder has attained 65 per cent. of the pressure in the discharge chamber, thus providing a free passage for discharge and avoiding the excess of pressure due to late opening.

Figure 3 shows a card from cylinder, 41 pounds gage pressure in reservoir and 85 R. P. M.

Figure 4 shows a card taken with same weight of spring and simultaneous with 3 from relief cylinder in back of outlet valve.

Figure 5 shows cards recording 3 discharge pressures and simultaneous discharge chamber pressures. The full lines are from the



Fig. 2.-OUTLET VALVE.

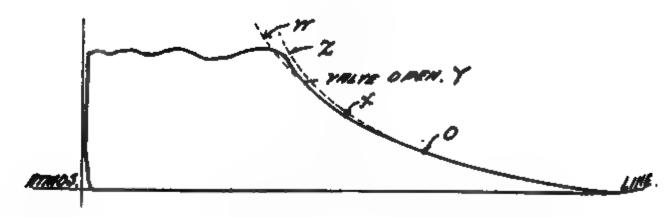


Fig. 3.—Compressor, 14 inches  $\times$  30 inches. Spring, 40 poneds. Z, Adiabatic curve. W. Continuation of compression curve. 85, R. P. M. 232

cylinder. The difference between these lines shows the resistance of this valve.

It is assumed that a large compressor of this type will give 90 per cent. mechanical efficiency and not less than 97 per cent. volumetric efficiency. The data given in the paper indicate that the force exerted

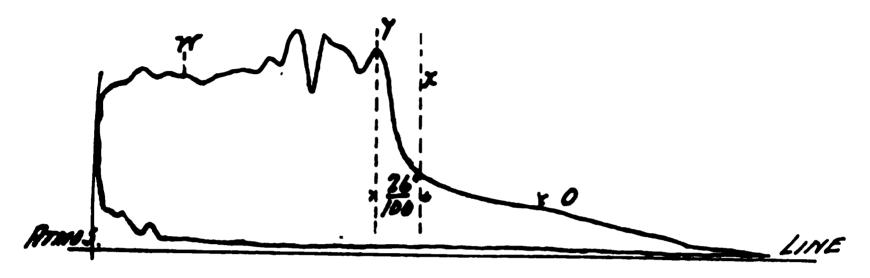


Fig. 4.—Cylinder in discharge valve,  $3\frac{7}{16}$  inches in diameter. Stem,  $\frac{7}{8}$  of an inch. Net area, 8.68 inches. Valve, 4 inches in diameter. Extreme throw of valve, 2 inches. R. P. M., 85. Air pressure in reservoir, 41 pounds. Spring, 40 pounds.

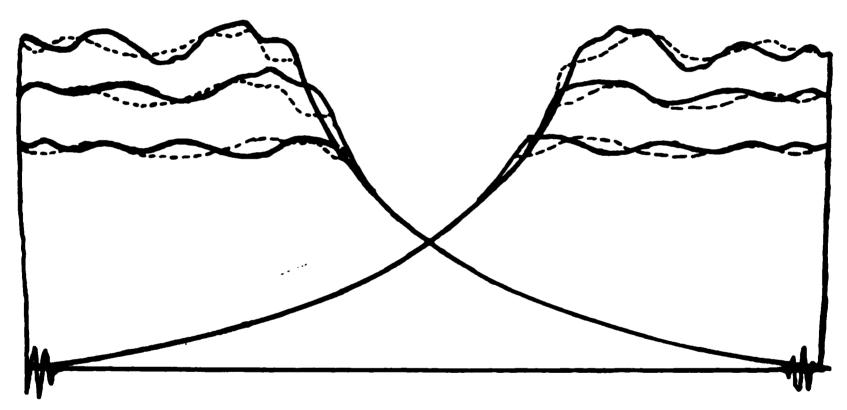


Fig. 5.—Compressor, 14 inches × 30 inches. Full line card from cylinder, dotted line card from discharge chamber, taken simultaneously. Springs, 40 pounds. R. P. M., 50. The maximum and minimum pressures in the cylinder and chamber do not vary much, but the wave of pressure is much later in the chamber, showing effect of inertia as in the air entering cylinder upon the opening of the valve.

by the air piston to compress and discharge the air will not exceed theoretic adiabatic compression, or that the small gain by jacket cooling during compression will suffice for the loss in the passage of the air through the inlet and outlet valves, so that adiabatic compression + 90 per cent. = the indicated H. P. of the steam-engine.

Simple compression per pound weight of air:

$$W_1 = AJ_0 \frac{\gamma}{\gamma - 1} \left\{ \left( \frac{p}{p_0} \right) \frac{0.29}{1} \right\} \text{ or } 95562 \left\{ \left( \frac{p}{p_0} \right) \frac{0.29}{1} \right\};$$

where p and p<sub>o</sub> equal absolute discharge and initial pressures and when the supply is at 60° F.

Each duplication of the same number of compressions from the same temperature will require the same energy.

Transmission of Compressed Air.—Professor S. W. Robinson, after many careful observations of the flow of natural gas in the Ohio field, gave the formula  $\sqrt{(p+p_0)} D \times g$ , in which p and  $p_0$  are the absolute initial and terminal pressures; D = the drop in pounds per square inch per mile; and g a multiplier depending on the internal diameter of the main. The table gives values for g:

	g or Multi- PLIER FOR GAS-SPECIFIC GRAVITY, 0.6.	ACTUAL DIAMETER OF MAIN, INCHES.
	274	2
	720	2 3
For the flow of gas of any other specific gravity	1,551	4
multiply these figures by:	2,708	5
marciply vactor against by .	4,280	6
0.6	6,280	7
	· 8,765	8
Specific gravity of other gas.	11,800	9
	15,800	10
	19,406	11
And multipliers for any other diameter of main =	24,150	12
	29,400	13
$276 \times \text{area of main.}$	35,500	14
1 00	42,400	15
20	49,580	<b>16</b>
diameter of pipe.	58,000	17
	66,560	18
	86,615	20

The correctness of Professor Robinson's formula and table was confirmed in the transmission of gas through an 8" main 42 miles in length with an initial pressure of 340 pounds per square inch, the gas being measured by indicating the pumps; also in pumping manufactured gas through a 10" main, 2.2 miles in length, initial pressure 5½ pounds by gage, and in the example given on page 240, where the

main was 8" and was 38 miles long, supplying several towns along its route.

Assuming that the correction for difference in the specific gravity of gases is applicable to air, air at 60° F. being 0.93,  $\sqrt{\frac{0.6}{0.93}}$ = 0.8032; then, the figures in the table, multiplied by 0.8032, will be correct for air at 60° F., and these, divided by 60 (col. B), will be correct for the flow per minute, and B divided by 13.08 for the pounds weight of air per minute = C:

ACTUAL DIAMETER OF MAIN.	B FOR FLOW OF AIR AT 60° PER MIN.	C FOR FLOW OF POUNDS WT. OF AIR PER MIN.	
2	3.66	0.028	
3	9.63	0.0736	
4	20.75	0.1586	
5	36.22	0.277	
6	57.15	0.437	
7	84.03	0.642	
2 3 4 5 6 7 8 9	117.3	0.897	1
9	158.0	1.207	$\sqrt{(p + p_0)} D \times B = \text{cubic feet of air at}$
10	205	1.566	14.7 lbs. and 60° F.
11	259	1.985	•
12	325	2.484	
13	392	3.007	
14	475	3.63	
15	566	4.332	$\mathbf{V}(\mathbf{p} + \mathbf{p_0}) \ \mathbf{D} \times \mathbf{C} = \mathbf{pounds} \ \mathbf{weight} \ \mathbf{of} \ \mathbf{air}$
16	663	5.071	at 14.7 lbs. and 60° F.
17	775	5.925	
18	892	6.82	·
19	1020	7.8	
20	1159	8. <b>86</b>	
22	1471	11.24	
24	1849	14.13	, 

Professor Urwin's analysis of the experiments on the mains of the Popp system in Paris gives the coefficient of friction:

$$\varsigma = 222900 \frac{d'}{U^2 L} \frac{(p_i^2 - p_{ii}^2)}{p_i^2};$$

in which

L = length of main in feet,

p, = initial absolute pressure pounds per square inch,

p,, = terminal absolute pressure pounds per square inch,

d' = diameter of main in feet,

and that the mean for  $\varsigma = 0.0029$ , or say 0.003. In these calcula-

tions deductions were made from the total resistance for that found in the drainage tank, etc., not being informed of the merits of this view and thinking that their total resistance might be equaled by that of any main in service. The coefficients of friction were worked out for the total resistances and varied from 0.0026 to 0.00533, average being 0.0037.

Professor Robinson's method of calculating is equivalent to a coefficient of friction of 0.00407 for an 8" pipe, and this, being the highest, and best established by personal observation, will be adopted.

Putting F = flow of free air per minute at 60° F.

L = length of main in miles.

$$\sqrt{(p+p_0)} \stackrel{\cdot}{D} \times B = F$$
 and  $(p+p_0) \stackrel{\cdot}{D} = \left(\frac{F}{B}\right)^2$ 
 $D = \frac{p-p_0}{L} \quad p^2 - p_0^2 = \left(\frac{F}{B}\right)^2 L$  and


 $p = \sqrt{\left(\frac{F}{B}\right)^2 \times L + p_0^2}$ 
 $p_0 = \sqrt{p^2 - \left(\frac{F}{B}\right)^2 \times L}$ .

Motor Driven by Compressed Air.—The cards (Fig. 6) are from an air motor, 20" diameter and 24" stroke, installed by the Philadelphia Engineering Works in Mexico. They are not shown as examples of excellence, as they were taken under disadvantages. The motor drives a pump, direct, by the prolongation of the piston-rod, and at the time these cards were taken the water was discharged through an adit level instead of at the shaft-head, as designed. This reduced the pressure of water and load on motor, making the wire drawing advisable. Apology should be made for the late exhaust; a correction of this by valve setting would have increased the work done per unit of air used.

These cards are an average of four sent by the erector.

Dotted line of initial pressure or pressure at cut-off, . 68.4
Atmospheric pressure,
Temperature of air delivered to motor, 180° F.
Temperature of exhaust at valve,
Reductions in pressure,
Expansions (nearly isothermal), 6
Area of left-hand card,
Spring

Weight of air used per single stroke calculated from
exhaust temperature and final pressure and volume
in cylinder,
M. E. P.,
Foot-pounds per single stroke,
This weight of air at 180° F. would have filled the
cylinder as shown by dotted card area, 11.25 square inches.
Foot-pounds by this card,
Calculated foot-pounds by adiabatic expansion; no
chilling, clearance, or back pressure, 17585
Percentage of work done by motor, 85.7

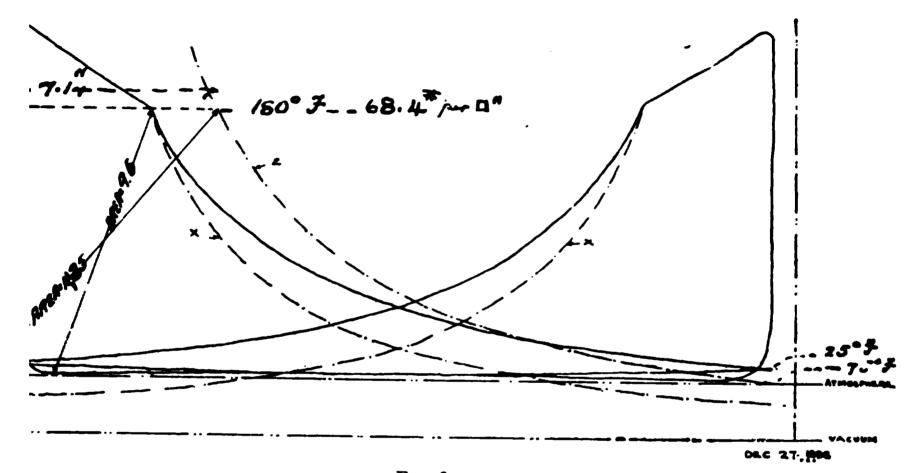

F1G. 6.

Air motor, 20 inches in diameter, 24-inch stroke. Scale of diagram, 20-pound spring.

Air heater by surface heater. Steam, 60 pounds.

Air heated by surface heater to a temperature of 180° F.

Temperature of air in exhaust, 25° F.

Temperature of engine-room, 84° F.

R. P. M., 32.

Pump plunger, 7½ inches in diameter.

The motor cylinder had Corliss trip-gear. The 5 per cent. of clearance is due to the relatively short stroke. The very considerable interchange of heat was augmented by the slow piston-speed of 128' per minute.

A motor with a reasonably long stroke, with trip-gear piston-valves in the head reducing the clearance to half of one per cent. or to one-tenth shown by the cards, and with the reduction of surface for giving up and taking up heat due to this type of construction, by a piston-

speed not under 500', and by greater nicety in valve-setting, securing early exhaust and proper compression, might be expected to indicate 90 per cent. of the theoretic adiabatic card.

But assuming that this efficiency is 86 per cent., an air motor, to indicate  $1000 \ H$ . P. using 16' reductions in pressure, or from 235.2 to 14.7 in two cylinders, would have a theoretic H. P. per pound of air, at  $60^{\circ}$  F., equal to:

 $M_2 = A_{J_0} \frac{2\gamma}{\gamma - 1} \left\{ 1 - \left(\frac{p_0}{p}\right)^{\frac{\gamma - 1}{2\gamma}} \right\} = 63262$  foot-pounds, or 1.911 H.P.; 86 per cent. of this being 1.64246 H.P.,  $\frac{1000}{1.64246} = 608$ , the pounds weight of air required at 60° F.

If this air is preheated and interheated to 340° F. or 801° absolute,  $\frac{608 \times 521}{801} = 395$  pounds per minute would suffice.

This weight of air at 14.7 and 60° F. would occupy 5166 cubic feet.

To obtain a pressure of 235.2 pounds at cut-off in first cylinder of motor, a pressure of 240 pounds in a receiver alongside the motor is allowed. It is proposed to transmit 395 pounds weight of air 20 miles through an 8" main and deliver it to this reservoir at a pressure of 240 pounds absolute.

By formula  $p = \sqrt{\binom{F}{B}^2 \times L + p_0^2}$ , where F = 5166, B (from table p. 235) = 117.3, L = 20,  $p_0 = 240$ ; then p = 310.5 pounds. Or from atmosphere 21.13 increases of pressure and for a triple compressor about 2.75 compressions in each cylinder.

Formula for triple compression per pound weight of air:

 $W_8 = A J_0 \frac{3\gamma}{\gamma - 1} \left\{ \binom{p}{p_0} \binom{\gamma - 1}{3\gamma} - 1 \right\} = 98333$  foot-pounds, or 2.98 *H. P.* for these conditions, if the air is received at 60° F., and intercooled to 60°. It has been assumed that a compressor would have 90 per cent. efficiency, then  $(2.98 \div 90\%)$  395 = 1308 *H. P.*; total indicated *II. P.* required by compressor.

To raise the temperature of 395 pounds of air from 60° F. to 340° F. before entering the first motor cylinder requires 280°  $\times$  0.23  $\times$  395 = 25438 B. T. U. The exhaust of this first cylinder is theoretically 801  $\times$  0.669 = 536° or 85° F.; practically it would be by interchange of heat over 100°, and the heat required to raise it to 340° for the second cylinder = 240  $\times$  0.23  $\times$  395 = 21804, total 47242

B. T. U., using coal of 14000 units to heat this air and estimating 70 per cent. transferred to the air.  $\frac{43608}{9800} = 4.82$  pounds per minute, 289.2 pounds of coal per hour.

The compressor engines working with a fixed cut-off adjusted to maximum economy, each and every stroke requiring the same weight of steam, may be designed and constructed to attain the highest recorded steam efficiency. Put this at 1.4 pounds of the best coal per horse-power per hour and add the coal to heat the air:  $1308 \times 1.4 + 289.2 = 2120.4$ , or 2.12 pounds per indicated horse-power in motor.

In the transmission of this air it is assumed that it will be delivered to the main at 60° F., and that the heat of the atmosphere, or the ground, if it is buried, will maintain this temperature during the 20 miles.

It is not assumed that the 8" pipe is the best size, all things considered. The loss in pressure in this instance is from 310.5 to 240 pounds, whereas a 10" pipe would have conveyed this weight of air, starting at 265.1 pounds.

If the transmission had been through an 8" pipe, 50 miles in length, the initial pressure of 393.1 pounds will be required for the 240 pounds terminal, and the total fuel consumption per H. P. in motor 2.3 pounds.

The loss in transmission is small if the velocity is low. This is effected by an enlargement of the line or by compression. High compression means high temperatures; this heat is lost, and were it not for compounding, intercooling, and the large percentage of the heat of preheating that can be recovered in work done, high pressures could not be considered for power transmission; but in employing these economies in compression and expansion high pressure may be used, and so reduce the loss in transmission.

Professor Robinson mathematically demonstrated that the greatest weight of an elastic fluid will be transmitted when the terminal pressure is half the initial. Should these figures be 500 pounds and 250 pounds, the air capable of 1000 H. P. in our motor could be trans-


mitted through an 8" line 96.7 miles in length for  $L = \frac{p^2 - p^2}{\left(\frac{F}{B}\right)^2} = 96.7$ .

The economic transmission of power for the distances mentioned

makes this agency not only desirable for transmitting the power of waterfalls, but when power is to be applied where fuel is more expensive than where the air motor is located. Such a case is seen in our office buildings, doing away with the hauling of coal and dirt and extra expenses incident to steam-boilers for power.

A mammoth compressor plant of the most economic type located on the river could deliver power to air motors in our office buildings as a profitable investment, and during the summer months cool the building to any desired temperature by automatically regulating the quantity of the air discharged from the motors under, not through, the roof.

The loss in transmission when air is distributed to various points is illustrated by the natural gas distribution, to which reference has been made.

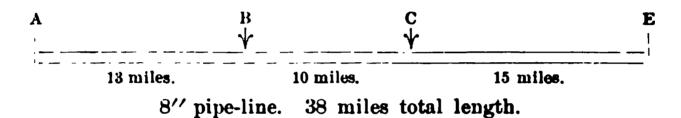

A, the source.

B, a town requiring 54,000 cubic feet of gas per hour.

The pressure at E to be 25 pounds by gage.

Determine pressure required at A.

In section C-E the flow =  $\sqrt{(p + p_0) D} \times 8765 = 262500 p_0 = 40$ , or absolute pressure at E. p = pressure at C.

D = drop in pounds per square inch per mile, or  $\frac{p-40}{15}$ ; then  $(p+40)\binom{p-40}{15} = 900$  and p=123 pounds.

and at 
$$A$$
,  $= 216$  "

The actual absolute pressure at A was 215

#### DISCUSSION.

ARTHUR FALKENAU. — The air-compressor valves shown by Mr. Gordon are particularly interesting. I do not remember ever having seen them in use before. I should like to know whether that form is extensively used now, and

whether it has proved satisfactory in a practical way. Most compressors have the poppet form of valve, and it would be of consequence to know whether the piston-valve has proved itself efficient.

Mr. Gordon.—The compressor illustrated was one that I built for simple demonstration, and it has never been used for any considerable time. It is, as you say, something of a novelty. Of course, piston-valves are well known in steam-engineering. They have a self-adjustment that the others have not. Slide valves are in favor, but wear badly. Few compressors with this type of valve have been built. The Philadelphia Engineering Works becoming the property of the Niles-Bement-Pond Co., it was elected to devote the works to electric cranes. A 72-inch blowing engine, to be driven by gas-engines direct at 160 R. P. M., has been built and supplied with these valves. The cylinderhead has two 18-inch valves for inlet and two 18-inch valves for discharge, giving a free area of 508 feet for air-inlet and the same area for the discharge. The Maryland Steel Company is building a compound compressor of very large capacity to supply their shippard with power to operate tools. Experience with piston-valves in marine steam-engines left no question with this company as to the durability and tightness of piston-valves. Piston-valves were preferred as giving close clearance, noiseless action, and, in the opinion of the company, good results as to wear. There are two 26 by 40 cylinders for compressing carbon dioxid at the Matheson Alkali Works, Saltville, Va. The manager carefully examined the action of the 14 by 30 experimental plant, and, expressing his high appreciation, gave the order. He is now negotiating for four more of the same size. I can not answer your question as to the durability except by saying that they should wear as well as piston steam-valves, which give excellent service; further, I have used rotating, sliding, or Corliss unbalanced valves for air compression, and find that they retain lubricants well and wear admirably.

MR. FALKENAU.—The reason I raised the point is that I know the tightness of valves is a very serious question in an air compressor. What is the efficiency of the compressor? Did you state that as 90 per cent.?

Mr. Gordon.—98.6 per cent., card measure.

Mr. Falkenau.—You do not mean the actual efficiency?

Mr. Gordon.—The mechanical efficiency was 87.91 per cent.

Mr. FALKENAU.—That is rather high for a small engine.

Mr. Gordon.—The engine was 12 by 30 and the compressor 14 by 30.

Mr. Falkenau.—How close did you get to isothermal compression? I am talking about the mechanical efficiency, comparing the compressor with the steam-engine.

Mr. Gordon.—I made all my calculations on adiabatic compression.

Mr. Falkenau.—That is the point. Of course the final efficiency depends upon the amount of compressed air that you obtain as a consequence of using a certain amount of steam. Now, that would depend largely upon how closely you came to isothermal compression. The nearer you compress adiabatically, the greater your loss will be, which is usually roughly figured at about 20 per cent.

With fairly good cooling, the ordinary line lies about half-way between the adiabatic and isothermal. Is that not your experience?

Mr. Gordon.—No. I would like to answer that in connection with the paper, as there is probably a misunderstanding. I have not taken into consideration isothermal compression at all. I made calculations upon adiabatic compression. I think the cooling of air during compression is exceedingly small. The saving from adiabatic compression very slight; in compressing to, say, 50 or 60 pounds, you may save as much as 20 per cent. of the difference between it and isothermal —that is, one-fifth of the area inclosed between the isothermal and the adiabatic line. That would be about all I can get by a thorough cooling of the jacket, with a piston speed up to about 400 or 500 feet per minute. Air does not take up heat very quickly, and the saving is small. Now, that small saving I claim is enough to balance the loss due to friction of the air in entering and going out through the valves I have illustrated, and I calculate that the cost of compressing the air is just what it would figure adiabatically compressed, and no more; but the volumetric efficiency,—that is, the quantity of free air compared to the displacement of the piston,—as nearly as I could measure the cards, was 98.6 %; but in the calculations I figure the volumetric efficiency 97%.

MR. FALKENAU.—I think the point which Mr. Gordon makes of the volumetric efficiency is a very important one. I rather think that it is higher than that of any compressors in the market.

Mr. Gordon.—Yes.

Mr. Falkenau.—I remember a certain compressor in which the volumetric efficiency was as low as 78%. The clearances were enormous. That is the point I see you have sought to overcome. In that connection I might tell of a rather peculiar experience out in Colorado, where they had a compressor running a number of drills. It failed, and after being overhauled by a certain engineer, I was called in some time afterward. They complained bitterly about the condition the compressor was in. They could not obtain the volume of air required to run one drill decently. On looking at the engine it appeared to me that the cylinder was extremely long for the throw the crank had, and I asked whether that was the original crank. The superintendent answered that it was. The engineer happened to be close by, and stated that the crank had been changed by him. It was a Clayton compressor, in which a thin layer of rubber about & of an inch thick was used under the valves. Upon investigation I found that these rubbers had given out, and some bright engineer, in order to make the compressor go,—he had not time to wait for the proper rubber disks to come from New York, as it was out in Colorado,—got some rubber pump valves about § or § of an inch thick and put them under the inlet valves. The inlet valves are next to When the piston came up, it struck these valves; to avoid this, he put in a new and shorter crank, giving 11 inch clearance, which, of course. explained why the efficiency was so poor. I pulled out the valves, resurrected the old crank shaft, ground the valves to a metallic seat, and telegraphed for new The metallic scat is used generally. I think Ingersoll used the metal-After the rubber was inserted, of course the efficiency rose at once, and lic seat.

they were able to run three drills. I have cited this instance to show that the amount of clearance is important.

MR. GORDON.—The case is entirely adiabatic all the way through. I give the amount of coal per horse-power per hour as being obtained by a triple expansion, the work done being exactly the same in the best economic cases. There is no variation in the distribution of steam, which is the real thing in reducing the efficiency of the steam-engine. It would be just as well in compressing air as it would be in pumping water if the pressure would be fixed at the head end of the main.

MR. FALKENAU.—I understand that the air was heated to 180° before it entered the motor?

Mr. Gordon.—Yes. By an ordinary feed-water heater with steam.

MR. FALKENAU.—Was your cylinder jacketed?

Mr. Gordon.—No, sir.

Mr. Falkenau.—Would that account for your drop then?

MR. GORDON.—Part of it.

Mr. Falkenau.—The fact that you heated the air and did not jacket the cylinders?

MR. GORDON.—The cylinder was not jacketed in the ordinary meaning of that term. There was no heat circulated around the outside of the cylinder. It was well lagged to prevent radiation.

Mr. Falkenau.—You mention that the motor was directly attached to the pump: was there one piston-rod making a direct connection between the two?

Mr. Gordon.—The piston-rod was long enough, so that the pump pistonrod did not enter the air-cylinder. I spoke of wire drawing. That was due to the fact that the pump was not discharging where it was originally intended to It was out in the wilderness and we could not get what we wanted. It has been demonstrated by a very fair amount of experimenting, especially in Paris, that the extra heat used in preheated air is nearly all returned in work, because you have the same losses no matter what the initial temperature is. It is working through a higher or lower range of temperatures. If the temperature is very high, you may have a little loss by radiation. The foot-pounds derived from a given weight of air expanded, the same number of pressures will be almost exactly proportional to the absolute temperatures of the air received by the cylinders. By a compound compressor driven by a compound condensing engine built by the Philadelphia Engineering Works, Ltd., for the Indianapolis Manufacturing Natural Gas Co., 600,000 cubic feet per hour were discharged through an 8-inch main 42 miles long. The head-pressure, 340 pounds absolute, varied but little. The gas was used entirely for manufacturing purposes. The load was so constant that a fixed cut-off might have been used, and owing to the regularity of the load, the highest steam economy may be obtained.

FRANCIS SCHUMANN.—Was there any difference in the quality of the gas at the point of inlet and the point of delivery on that 42-mile run?

Mr. Gordon.—Natural gas is not thought to be impaired by pressure, and this my observation confirms. A cubic foot of free gas in the Indianapolis field has a

#### 244 Gordon—Transmission of Air and Gas through Pipes.

value of 1000 B. T. U., and it can be depended on for that much heat. If used under a boiler, from 700 to 750 may be obtained as steam. But the combustion of either natural, manufactured, or blast-furnace gas is but poorly understood. Sufficient air is seldom used or sufficient space allowed for the rapid expansion due to heat, therefore opinions based on practice should be received with reservation. I have doubled the heat obtained at a supposed highly economical plant by judicious mixtures and an enlarged combustion chamber. For heating purposes there is no objection to the compression required for economic transmission, and for illumination water-gas may be transmitted and afterward enriched. The transmitted illuminating gas at Louisville through a 10-inch main 2.2 miles long, with a head pressure of 5½ pounds per square inch, I understood did not show any loss in light.

### ABSTRACT OF MINUTES OF THE CLUB.

REGULAR MEETING, September 15, 1900.— The first Vice-President in the chair. Forty-four members and one visitor present.

The Secretary announced the death of two members—Emile Geyelin, on June 28th, and J. Simpson Africa, on August 8th.

Mr. L. Y. Schermerhorn read a paper entitled "The Water-jet as an Aid to Engineering Construction." The subject was discussed by Messrs. Davis, Hubbard, Christie, Nichols, Chance, Furber, Little, and Leffmann.

Business Meeting, October 6, 1900.—The President in the chair. Sixty-one members and three visitors present.

The celebration of the anniversary of the founding of the Club was brought before the meeting, and after some discussion the matter was referred back to the Board with a favorable recommendation.

A communication from the Engineers' Society of Western New York relating to a joint congress and engineering exhibit at the Pan-American Exposition was referred back to the Board with a favorable recommendation and power to arrange details.

The Tellers reported the election of Messrs. Charles H. Davis, H. D. Hess, F. C. Schmitz, J. Wilbur Tierney, and W. M. Walmsley to active membership; Mr. L. Erle Edgar to junior membership; and Mr. Adam Laidlaw to associate membership.

Mr. Frederick W. Gordon read a paper entitled "Transmission of Gas and Air :hrough Pipes; and the Transmission of Power by Compressed Air." The subject was discussed by Messrs. Falkenau, Head, and Schumann.

REGULAR MEETING, October 20, 1900.—The President in the chair. Sixty nembers and three visitors present.

Mr. Carl G. Barth read a paper entitled "The Strength of the Ideal Column, and ta Relation to the Safe Load on a Practical Column; Some New Formulas, and Their Comparison with Older Ones." The subject was discussed by Messrs. Christie and Marburg.

Business Meeting, November 3, 1900.—The President in the chair. Fifty-two members and eight visitors present.

A topical discussion on "American Isthmian Canals" was held, the participants being Messrs. James Christie, Edwin F. Smith, and L. Y. Schermerhorn.

Messrs. William E. Bradley, H. J. Edsall, and Willibald Trinks were elected to active membership.

#### ABSTRACT OF MINUTES OF THE BOARD OF DIRECTORS.

STATED MEETING, September 15, 1900.—Present: The Vice-Presidents, Directors Levis, Souder, and Christie, and the Secretary. The first Vice-President in the chair.

The Treasurer's report showed:

Balance, June 1, 1900,							•		<b>\$1539.20</b>
Receipts, June, July, and August,			•	•	•			•	604.40
Total,		•			•		-		\$2143.60
Disbursements:		•			<b>^</b> 4				
Bills paid,	•	₽1	33	3.	94				
Transferred to 3% account,	•		50	0.	00				1833.94
Balance, August 31, 1900,		•	•	•				•	<b>\$</b> 309.66

The Library Committee reported that during the summer 742 books had been labeled and entered on a card-index; a new magazine-case had been put in use for holding current numbers of each periodical, protected by a neat leather-back covering.

The House Committee reported the appointment of Geo. W. Shellem as Janitor of the Club-house.

STATED MEETING, October 20, 1900.—Present: The President, Vice-Presidents. Directors Levis, Souder, Christie, and Smith, and the Secretary.

The Treasurer's report showed:

Balance, August 31, 1900,		•		•	•			•		•		<b>\$3</b> 09.66
September receipts,			•			•	•		•	•	•	221.10
Total,								•				530.76
September disbursements,					•						•	251.26
Balance, September 30,	190	0,				•		•	•	•		\$279.50

The question of cooperating with the Engineers' Society of Western New York having been referred back to the Board by the Club, was on motion decided that the President should appoint a committee of the Club to confer with a committee of the above Society, and report to the Club what action seemed desirable.

### DONATIONS TO GENERAL LIBRARY.

FROM GENERAL HERMAN HAUPT, WASHINGTON, D. C. General Superintendents of Pennsylvania Railroad.

FROM INDIANA GEOLOGICAL SURVEY, INDIANAPOLIS, IND. Twenty-fourth Annual Report, 1899, Blatchley.

FROM SUPERINTENDENT OF DOCUMENTS, WASHINGTON, D. C.

April, 1900.

Monthly Summary Commerce and Finance, March, 1900.

Consular Reports, May, 1900, No. 236.

" June, 1900, " 237.

Exports declared for the United States; Supplement to Consular Reports, No. 235.

Year-Book, Department of Agriculture, 1895.

" 1897.

FROM PERCY T. OSBORNE, PHILADELPHIA.

Annual Report, Chief of Engineers, 1881.

Strains in Trusses, Ranken, 1872.

Engineers' and Contractors' Pocket-Book, Weale, 1854.

Railroad Curves, Trautwine, 1851.

Engineers' Common-Place Book, Templeton, 1841.

Mortars and Cements, Vicat, 1837.

Skeleton Structures, Henrici, 1867.

Pocket Companion, Byrne, 1851.

Rudiments of Civil Engineering, Law, 1848.

Report on Cauca Railway, Cisneros, 1878.

Bridge Building, Crescy, 1839.

Potomac Aqueduct, 1839.

Tredgold's Railroads and Carriages, 1835.

Johnson's Imperial Cyclopedia of Machinery.

Naval Dry Docks of United States, Stuart.

European Railways, Colburn & Holley, 1858.

Computation of Earth-work, Warner, 1861.

Journal, Franklin Institute, Vols. XXXIX-XLII.

Engineers' and Architects' Journal, Vols. VII-XXI, 1844-1858.

Waterford and Limerick Railway Profile (Ireland).

FROM JAMES B. BONNER, PHILADELPHIA.

Pocket Companion, 1900.

FROM DEPARTMENT OF STATE, U. S. A.

Report, Seventh International Congress of Navigation, Brussels, July, 1898.

FROM BOARD OF RAILBOAD COMMISSIONERS, ALBANY, N. Y. Report on Tests of Street-car Brakes, 1899.

FROM INSTITUTE OF CIVIL ENGINEERS, LONDON. Excerpt Minutes of Proceedings, Vol. CXL, Session 1899-1900, Part II.

From Geo. S. Webster, Chief Engineer, Bureau of Surveys, Phila. Annual Report, Bureau of Surveys, Phila., 1899.

FROM THE MERCHANTS' ASS'N OF NEW YORK.
The Water-supply of the City of New York.

FROM THE AMER. Soc. HEATING AND VENT. ENGINEERS. Transactions, Vol. 5.

FROM HARVEY LINTON, ALTOONA, PA. Manual for City of Altoona, Pa., 1900-1901.

FROM GEOLOGICAL SURVEY OF NEW JERSEY. Annual Report, State Geologist, 1889.

FROM COMMISSIONER-GENERAL FOR UNITED STATES.
Paris Exposition, Official Catalogue U. S. Exhibitors.

FROM J. W. TAYLOR, SEC'Y.
Proceedings American Railway Master Mechanics Ass'n., Vol. XXXIII, 1900-

FROM G. EIFFEL, PARIS, FRANCE.
La Tour de Trois Cents Métres. 2 Vols., Plates and Text.

FROM MONTANA SOCIETY OF ENGINEERS. Synopsis of Proceedings of Meetings, 1899.

### **PROCEEDINGS**

OF

# HE ENGINEERS' CLUB

OF

### PHILADELPHIA

**VOLUME XVIII** 

EDITED BY THE PUBLICATION COMMITTEE

PHILADELPHIA

THE ENGINEERS' CLUB OF PHILADELPHIA

1901

FROM BOARD OF RAILEO\*\*
Report on Tests of Street.

FROM '

Excerpt Minutes o

FROM GRO. S. V Annual Report

The Water-

Transac'

Man

A



## INDEX.

	PAC	3 <b>E</b>
ABSTRACT of Minutes	of Board of Directors,72, 133, 210,	319
	of Club,	
-	3,	21
	torical Sketch of Engineers' Club of Philadel-	
•		61
Annual Address of Presiden	it,	1
	f Directors,	75
or Dom u	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	
Bertolett, Edwin F., Fire-pro	oof Construction in Philadelphia,	177
Birkinbine, John, Duty of the	he Engineer to His Clients or Employers,	221
, ,	n on Pennsylvania Forests,	93
	Variations of Standards of Measurements, 127, 129	
•	ater-tube,	137
	on Variations of Standards of Measurements,	127
	ing,	100
	struction of a Factory,	174
Chimneys, Design and Con	struction of,	156
Christie, James, Discussion	on Chimneys,171, 172,	
	Duty of the Engineer,	<b>24</b> 2
	Interchangeable Gearing,	<b>5</b> 9
	Toothed Gearing,	43
	y and Hydrography of the Isthmian Region,	21
•	on Variations of Standards of Measure125, 127,	130
•	on on Pennsylvania Forests,	95
•	,	
DESIGN and Construction	n of Factory Chimneys,	156
Duty of the Engineer to 1	Himself and His Profession,	213
	His Clients or Employers,	221
	His Contractors and Employees,	227
•	the Public,	234

	PAGE
Eddowes, A. B., Some Unusual Locomotives,	276
Engineering Features of Nicaragua Route,	32
Engineers' Club of Philadelphia, Historical Sketch of,	61
Expanded Metal in Fire-proof Construction,	200
Expanded Metal III The-proof Constitution,	200
Falkenau, A., Discussion on Duty of the Engineer,	245
Field Engineering, Variations of Standards of Measurements Employed	240
in,	118
Fire-proof Construction, Expanded Metal in,	200
in Philadelphia,	177
Franklin, Benjamin, Variations and Uses of the Standards of Measure-	***
ments Employed in Field Engineering,	118
Furber, Wm. Copeland, Discussion on Chimneys,	171
Duty of the Engineer,	243
Fire-proof Construction,	' 198
GEARING, High-speed Toothed,	43
Interchangeable,	51
Geyelin, Emile C., Obituary of,	68
Graves, E., Discussion on Interchangeable Gearing,	<b>56</b>
Haning Carl Discussion on Same Unusual Learnestings	215
Hering, Carl, Discussion on Some Unusual Locomotives,	315
High-speed Toothed Gearing,	43
Historical Sketch of Engineers' Club of Philadelphia,	61
Holcombe, A. H., Discussion on Duty of the Engineer,	246
Hubbard, I. Wendell, Construction of a Factory Chimney,	174
	21
INTERCHANGEABLE Gearing,	51 21
Isthmian Region, Topography and Hydrography of,	21
Lutingun Hann Dignusian on Dunnardrania Foresta	94
Lejjmann, Henry, Discussion on Pennsylvania Forests,	316
Some Unusual Locomotives,	•
Lewis, Wilfred, Interchangeable Gearing,	5
Livingston, Max, Discussion on Duty of the Engineer,	2-1
Locomotives, Some Unusual,	20
Lowland Protections, Practical Building of,	24
Maignen, P. J. A., Discussion on Pennsylvania Forests,	95
Marburg, Edgar, Anniversary Address—Sketch of Engineers' Club of	<i>(N)</i>
	A 1
Philadelphia,	61
Discussion on Chimneys,	169
Some Unusual Locomotives,	315
Duty of the Engineer to Himself and His Profession,	213
Nineteenth Century Engineering,	1

Index. v

	PAGE
Measurements Employed in Field Engineering, Variations and Uses of,.  Merritt, James S., Expanded Metal in Fire-proof Construction,	118 200
Morris, Henry G., Parker Steam Generator,	138
NICARAGUA Route, Engineering Features of,	32
Nichols, E. M., Discussion on Variations of Measurements,	128
Nineteenth Century Engineering,	1
Notes on the Construction of a Factory Chimney,	174
PANAMA Route,	38
Parker, John C., Science of Steam-making,	147
Steam Generator,	137
Pennsylvania Forests and What is Necessary to Restoration,	79
Philadelphia, Engineers' Club of, Historical Sketch of,	61
Piez, Charles, Chains and Chain Gearing,	100
Practical Building of Lowland Protections,	248
Rondinella, L. F., Discussion on Chains and Chain Gearing,	116
Chimneys,	71, 172
Interchangeable Gearing,	57, 59 79
Schermerhorn, L. Y., Discussion on Chains and Chain Gearing,	116
Pennsylvania Forests,	96
Protections,	248
Some Unusual Locomotives,	316
Duty of the Engineer to His Contractors and Em-	005
ployees,	227
Panama Route, Chimnens Chimnens	38
Schumann, Francis, Design and Construction of Factory Chimneys, Discussion on Variations of Measurements,	156 128
Science of Steam-making,	147
Smith, Edwin F., Engineering Features of Nicaragua Route,	32
Snell, Henry I., Discussion on Chimneys,	
Some Unusual Locomotives,	276
Spackman, Henry S., Discussion on Chains and Chain Gearing,	116
Sweeney, Frank, Discussion on Chimneys,	169–172
TOPOGRAPHY and Hydrography of Isthmian Region,	21
Trautwine, Jr., John C., Discussion on Pennsylvania Forests,	98
Variations of Measurements,	128
Duty of the Engineer to the Public,	234
Trinks, W. Discussion on Interchangeable Gearing.	60

vi Index.

	PAGE
VARIATIONS and Uses of the Standards of Measurements Employed in Field Engineering,	118
Webb, Walter L., Discussion on Some Unusual Locomotives,	316
Wilson, Percy H., Practical Building of Lowland Protections	248



### **PROCEEDINGS**

OF

### THE ENGINEERS' CLUB

OF PHILADELPHIA.

ORGANIZED DECEMBER 17, 1877.

INCORPORATED JUNE 9, 1892.

Note.—The Club, as a body, is not responsible for the statements and opinions advanced in its publications.

Vol. XVIII.

FEBRUARY, 1901.

No. 1.

### NINETEENTH-CENTURY ENGINEERING: ITS EVOLUTION, AND SOMETHING OF ITS BEGINNINGS IN AMERICA.

ADDRESS BY THE RETIRING PRESIDENT,

EDGAR MARBURG.

Read January 19, 1901.

Engineering, in its modern and highest sense, had its birth in the nineteenth century when science became its spirit. The history of science,—its early birth, its long slumber, its awakening scarce four centuries ago, its rapid rise, and, finally, its beneficent union with the arts in the century just closed,—forms one of the most impressive chapters in the annals of the human race. It is the later phases of this development upon which I shall chiefly dwell; yet, for a true perspective, the story must be traced from its beginning.

Science received its first vigorous impulse during the third and fourth centuries before the dawn of the Christian era. Aristotle and Archimedes—twin luminaries of the ancient scientific world—were its chief exponents. In the sense that Aristotle may be called the father of philosophy, Archimedes was the parent of mechanics. The one concerned himself more with the abstract; the other, with the concrete. While Aristotle formulated philosophic theories, at once profound and fanciful, and all-embracing in their scope, Archimedes' teachings were addressed straight to men's reason. Yet the Aristotelian philosophy, in form much mutilated and perverted, was destined to hold sway for

well-nigh twenty centuries. Throughout this epoch fantastic speculations passed for science, scholars concealed their ignorance behind a veil of mysticism, and their disciples accepted in reverent faith false dogmas handed down through ages. The application of the principles of science to the practice of what were called the sordid arts was held in contemptuous disdain by the learned as a desecration of science. Inductive methods of investigation were similarly despised: if facts did not accord with philosophic theories, so much the worse for the facts.

Thus steeped in ignorance and superstition stood the world at the dawn of the sixteenth century. Exact science had made no progress since the days of Archimedes. Then came the intellectual awakening. Slowly at first, but surely, the clouds were lifted and science was liberated from its encircling maze of metaphysical obscurities. The leaders in the crusade, Copernicus, Galileo, and their followers, met with fierce denunciation for their heresies. But though the authors did not escape the ridicule and persecution of their times, their works lived after them. A new school of philosophers sprang up; the light of science had been rekindled. Its expounders grew more and more audacious, until in the end their position became impregnable. But the breaking down and stamping out of the time-honored dogmas and superstitions was still the work of centuries.

To recount, even in the barest outline, the chief discoveries of the illustrious line of scientists who cleared the way, during the sixteenth, seventeenth, and eighteenth centuries, for the triumphs of our age would far transcend the limits of my narrative, and were indeed foreign to its purpose. The important fact is to be held in view, however, that up to the beginning of the present century, science—notwithstanding its brilliant progress—had made relatively little impress upon the arts. Engineering, the special subject of our inquiry, was then, as it had ever been, the art and not the science and art of construction; and was dependent, as it had ever been, upon precedent, empiricism, or bold initiative without the adventitious aid of science. Practice and theory, so far as the latter had been developed, were still separated by a formidable gulf. Science was esoteric; its writings were fragmentary, comparatively inaccessible, largely in Latin, and unknown or unintelligible to men of practical training. Moreover, the theory underlying such fundamental matters as the resistance of materials, the

stability of structures, the flow of fluids, the efficiency of motors, had been inadequately developed or involved errors and misconceptions to such extent as to render it unfit for the needs of practice. Such few experiments as had been made to test the validity of theoretic laws had necessarily been conducted on a small scale with crude appliances. That elusive, ever-varying, but indispensable, bond between theory and practice—the empiric constant—had scarcely an existence.

Such, in brief outline, were the conditions at the opening of the nineteenth century, nor might they have been essentially different at its close but for the discovery of the potentialities of steam. It were, indeed, an interesting field for speculation to fancy what the world would be to-day had Watt's invention been deferred another century; or, on the other hand, to consider how greatly its exploitation would have been retarded had it been given to the world three centuries earlier, when science existed in little more than name.

Although it is impossible in our day to gain a just conception of life a century ago, yet it will at least conduce to a better understanding for present purposes to notice briefly the state of transportation in England and America during the period immediately antedating the age of steam.

The history of barge canal navigation in England dates only from 1759, when the first Act was passed authorizing the construction of a canal from Worsley to Manchester. It was a prodigious undertaking for its day; Francis, the Duke of Bridgewater, was its patron; James Brindley, the engineer. Some curious glimpses of the times may be had from Smiles' "Life of Brindley." Manchester was then an active manufacturing town of 20,000 inhabitants, in which all operations of manufacture were carried on by hand. The surrounding conditions were fairly typical of inland towns in England at that period. The roads out of Manchester were so wretched that the traffic had to be carried on largely by pack-horses. Much suffering resulted, especially in winter, from the frequent scarcity of food and dearness of fuel for want of transportation, although coal abounded within a short dis-Smiles writes in 1864: "It is difficult now to tance of the town. realize the condition of the poor, in remote districts of England, at In winter they shivered over scanty wood-fires, for timber that time. was almost as scarce and as dear as coal. Fuel was burnt only at cooking times or to cast a glow about the hearth in the winter evenings. The fire-places were little apartments of themselves, sufficiently capacious to enable the whole family to sit within the wide chimney. Fortunate were the villagers who lived hard by a bog or a moor, from which they could cut peat or turf at will. They ran all risks of ague and fever in summer, for the sake of the ready fuel in winter. But in places remote from bogs and scantily timbered, existence was scarcely possible; and hence the settlement and cultivation of the country were in no slight degree retarded until better communications were opened up."

Nevertheless, the first canal projects in England evoked a storm of ridicule and opposition, as did the railways a half-century later. Some denounced the scheme as visionary and impracticable; others predicted that the country would be ruined, that estates would suffer irreparable damage, that inland navigation would destroy the coasting trade, that the canals would drain the water from the rivers, and that the many owners and drivers of wagons and pack-horses would be wrongfully deprived of their living. An engineer consulted by the Duke on Brindley's plan of spanning the Irwell by an aqueduct, condemned the same as wholly impracticable, closing with the caustic observation: "I have often heard of castles in the air, but never before saw where any of them were to be erected." Within less than two years the canal had been completed as projected, and the "castle in the air" had become a thing of stone and mortar. Contemporary writers referred to it glowingly as a "river hung in the air" and as "perhaps the greatest artificial curiosity in the world, visited daily by crowds of people, including those of the first fashion." It is related that "most of the laborers employed upon the work were of a superior class, and some of them were 'wise' or 'cunning men,' blood-stoppers, herb-doctors, planet-rulers and the like, whose very superstitions made them thinkers and calculators."

Notwithstanding the complete success of the undertaking and the immediate benefits that followed, the opposition was by no means pacified. In some later projects, planned on a larger scale, it was proposed, as a conciliatory measure, that the canal should not be carried nearer than within four miles of any important town, so that the carriers and horses might not be thrown out of employment.\* A

<sup>\* &</sup>quot;The Advantages of Inland Navigation," by R. Whitworth, 1766.

number of towns were thus left high and dry, to the serious injury, as they soon perceived, of their own interests.

The physical difficulties surmounted in the construction of these new arteries of travel and commerce, by expedients equally bold and ingenious, are among the most notable achievements in the earlier history of engineering, to which justice can not be done by a brief recital. A gentleman of the period—an eye-witness to the construction of one of the great tunnels in 1767—was moved to refer to the subterranean navigation as the "eighth wonder of the world," and informs his correspondent that "the great Mr. Brindley handles rocks as you would plum-pies, and makes the four elements subservient to his will." The engineers of our day may find some comfort in the knowledge that the wizard thus eulogized—without whose services a work costing the then stupendous sum of 220,000 pounds could scarcely have been carried to a successful issue—received a compensation at no time exceeding 3s. 6d. a day. This was the unlettered genius of whom Carlyle wrote: "The ineloquent Brindley, behold he has chained seas together; his ships do visibly float over valleys, invisibly through the heart of mountains; and the Mersey and the Trent, the Humber and the Severn, have shaken hands."

These earlier works, aside from their immense commercial value to the districts traversed, proved so remunerative to their owners that similar enterprises were started on all sides. Before the close of the century, England had been channeled in all directions, and the kingdom stood on the verge of a canal craze. Then came the usual chapter of overspeculation and stock-jobbing, with its invariable sequel of panic and bankruptcy. But these temporary evils were as nothing in contrast with the lasting benefits conferred upon the people—especially the poorest and most dependent classes—through the betterment of transportation.

In America the conditions at that early period were very different. When the colonies had emerged from their long struggle for independence, the question of improved transit pressed with doubled force. The settlements were widely scattered; the highways which threaded the intervening wilderness were in a state wretched beyond description; but the country was impoverished and public improvements on a larger scale were for the time impossible. Stages, retired for the most part during the war, resumed their lumbering course between

distant towns. Rivers were crossed in row-boats and clumsy scows. At times of wind and ice the passage was fraught with peril. To go from Philadelphia to Boston meant an arduous journey of nine days. The traveler was cooped in the stage for eighteen hours out of the twenty-four, not counting the intervals of freedom during which he lent a hand at extricating the heavy vehicle from a rut. The tour from Philadelphia to New York usually occupied three days, although as early as 1766 a vehicle, dubbed the flying machine, "being a good wagon with seats on springs," was announced to make the trip in the remarkable time of two days, though not without an increased charge.\* Who will say but that our own "cannon-ball express" will in its turn provoke the indulgent smile of future generations?

Canals had at that time no existence in America. Long before the Revolutionary War, far-sighted men had, indeed, perceived their economic value, and general locations had been proposed; but nothing decisive had resulted. As early as 1690 William Penn had conceived the idea of connecting the Schuylkill with the Susquehanna.† In 1762, or nearly three-quarters of a century later, an actual survey of this route was made by David Rittenhouse.‡ George Washington had planned to join the waters of his favorite Potomac with the Ohio, with a view not only of providing a better outlet for the commerce of the West, but of diverting the northern fur trade from Montreal to Alexandria.

The war set for a time an end to all such schemes; but soon upon its close canal construction was actively initiated. As early as 1785 the Potomac Company was incorporated, with Washington himself as President, for the improvement of navigation on the Potomac. The Santee Canal, to connect the Santee River with Charleston harbor, was chartered in the year following. This canal, twenty-two miles in length and completed in 1800, had the distinction of being the first artificial waterway for inland navigation in America, and the misfortune of proving unsuccessful. The Schuylkill and Susquehanna Navigation Company and the Delaware and Schuylkill Navigation

<sup>\*</sup> McMaster's "History of the People of the United States."

<sup>†</sup> William Penn's "Proposals for a Second Settlement in the Province of Pennsylvania" (1690).

<sup>#</sup> Watson's "Annals of Philadelphia."

Company were incorporated in 1791 and 1792 respectively. After a joint expenditure of nearly half a million dollars both companies found themselves in financial straits, and construction had to be abandoned. Long afterward their interests were merged and the work was finally completed as the Union Canal in 1827. In January, 1828, the first boat, the "Susquehanna," with its cargo of "black diamonds" from the coal-fields, passed the summit level.

Space does not admit of a connected account of these early navigation projects. An exception must be made, however, of an enterprise in New York which paved the way for the great Erie Canal. In 1792 the Western Inland Lock Navigation Company obtained authority by Act of Legislature to establish navigable communications from the Hudson River to Lake Ontario and to Seneca Lake. The work consisted in the improvement of existing water-courses; the circumvention of falls by locks; and the construction of a canal about two miles in length from the upper waters of the Mohawk to Wood's Creek, emptying into Oneida Lake. It is related that the committee appointed to explore the route and to prepare the preliminary estimates had so little data for their guidance that they found it expedient to send a delegation of "respectable mechanics" to examine the works then in course of construction on the Potomac.\* They duplicated the serious error committed there of building the locks of wood which fell into decay within six years. Navigation from Schenectady to the Seneca Falls was opened in 1796, at a cost far exceeding the original estimate of \$200,000.

Reviewing these early navigation projects in general, their history is largely one of failure—partial or complete—and of financial loss. The first efforts were directed mainly to the improvement of navigation on the rivers by the removal of obstructions, the building of sluices, and—at more difficult points—by the construction of locks. Engineering skill and money were both lacking. The cost usually far outran the estimate. The want of experience necessitated the employment of foreign engineers. Foremost among these stood William Weston, described by Watson as "a respectable, practical canal engineer, from England."

<sup>\*&</sup>quot;History of the Rise, Progress, and Existing Condition of the Western Canals," by Elkanah Watson (1820).

The bold conception of connecting the Hudson with Lake Erie by an independent canal can not be definitely traced to its first author.\* The question began to be agitated soon after 1800. The magnitude of the undertaking seemed, however, so appalling that the matter was not taken seriously until 1808, when Resolutions were passed by the State Legislature looking to the appointment of a committee "to take into consideration the propriety of exploring, and causing an accurate survey to be made of the most eligible and direct route between the tide waters of the Hudson River and Lake Erie." To initiate this work, the modest appropriation of \$600 was set aside. James Geddes, who was employed to make this survey, used an instrument made in Philadelphia by David Rittenhouse. Again nine years elapsed until, by the passage of the memorable Act of April 17, 1817, the enterprise was definitely launched. So vigorously was it prosecuted that it was completed within eight years, its total length from Albany to Buffalo representing a distance of 363 miles. Elkanah Watson, who thirty years before had been one of the first explorers and most ardent advocates of the route from the Hudson to Seneca Lake, writes in 1820: "The utmost stretch of our views was to follow the track of Nature's canal and to remove natural or artificial obstructions; but we never entertained the most distant conception of a caual from Lake Erie to the Hudson. We should not have considered it much more extravagant to have suggested the possibility of a canal to the moon." The estimated cost was somewhat less than \$5,000,000. The actual amount exceeded twice that sum, borne by the State of New York single-handed, after futile efforts to secure the cooperation of the adjacent States and of the national government. The Erie canal will be forever memorable as the first great triumph of native engineering skill. Too much credit can not be given to those pioneers of our profession in America,—to Benjamin Wright, James Geddes, and their associates,-through whose talents, resourcefulness, and sound judgment success came, not as a happy chance, but as an inevitable sequel.

Let us turn now to a hasty survey of the early history of steam. In 1763 Watt conceived his master-thought, destined to revolutionize the world. After a wearisome struggle of thirteen years the first prac-

<sup>\*</sup> Memoir prepared for Presentation at the Opening of the New York Canals, 1825, by Cadwallader D. Colden.

densing engine pointed out new possibilities in the use of steam. Men's minds soon fell to exploiting these in novel channels. In 1801 Symmington used Watt's engine to propel the "Charlotte Dundas" on the Clyde. The honor of the first commercial success in steam navigation was won, however, by America, in 1807, when Fulton's "Clermont" steamed from New York to Albany. Indeed, as early as 1787, the erratic genius of John Fitch had contrived a diminutive steam craft, "The Perseverance," which made a trip up the Delaware from Philadelphia to Burlington. The first crossing of the Atlantic by steam was from West to East, in 1819, when the American vessel, the "Savannah," covered the distance from Savannah to Liverpool in twenty-five days, during eighteen of which she had proceeded under steam.

As early as 1779, an American, Oliver Evans, had constructed the first high-pressure, non-condensing engine. His application, in 1786, for a patent on the propulsion of land carriages by steam was denied by the State of Pennsylvania, the idea being regarded as preposterous. The patent was awarded later by the State of Maryland. It is estimated that in 1803 there were not more than six steam-engines in America, two of which belonged to the Philadelphia waterworks. These engines as well as their boilers were made largely of wood.\*

At the beginning of the century, Trevithick was struggling in England for the adoption of high-pressure steam against determined opposition, headed by Watt himself. Nevertheless, his first steam-carriage, nicknamed "The Puffer," was operated in 1801, and was followed three years later by the first locomotive worthy of the name.

It were tedious to enumerate the various schemes designed to overcome the imperfections of Trevithick's invention. They were based mostly on the prevailing fallacy that smooth wheels could exert little or no tractive force on the rails. Toothed-wheels and rack-rails, endless chains, movable legs and feet, and other strange devices were designed to remedy the imagined difficulty. Although this curious error was refuted by Hedley's experiments in 1813, many years elapsed until the true conditions were fully recognized and generally accepted.

<sup>\*&</sup>quot;Notice of the Earliest Steam Engines Used in the United States," by Frederick Graff, "Journal of the Franklin Institute," 1853.

George Stephenson's first locomotive was built in 1814. The first passenger train, with Stephenson as engineer, was run on the Stockton and Darlington Railway on September 27, 1825. Then came the happy combination of the steam-blast with the multitubular boiler which, in October, 1829, enabled Stephenson's "Rocket" to distance all competitors in the famous trial on the Liverpool and Manchester Railway. The speed developed was about thirty miles an hour. Four years earlier, Nicholas Wood had written in his then authoritative treatise on the railway: "Nothing can do more harm to the adoption of railways than the promulgation of such nonsense as that we shall see locomotives traveling at the rate of twelve miles an hour."

Thus, following Watt's invention by over fifty years, the locomotive had at length attained to something like perfection. Accompanying the few successes the failures had been innumerable. Nothing in the history of invention is more pathetic and yet more inspiring than the life-stories of some of these heroic early workers. In the face of poverty and the derision of their fellows they struggled ever on. Their burning thoughts gave them no rest, and disappointment served only as a spur to greater effort. Negatively, each failure contributed something to the common fund of knowledge, and thus their labors were, after all, not wholly wasted. Luckless John Fitch epitomized the feelings of many of his class in his despairing utterance: "The day will come when some more powerful man will get fame and riches from my invention; but nobody will believe that poor John Fitch can do anything worthy of attention." He died by his own hand in 1798.

The experiments with steam locomotion in England soon attracted the attention of American engineers. Early in 1828, or nearly two years before the historic competition already mentioned, Horatio Allen had been sent to England to purchase three locomotives for the Delaware and Hudson Canal Company for trial between Honesdale, Pa., the head of navigation on the canal, and the coal-mines at Carbondale, a distance of about sixteen miles. The first of these, and indeed the first locomotive in America,—the "Stormbridge Lion,"—reached New York on May 17, 1829. Its first trial, a run of three miles and return, was made at Honesdale on August 9th of the same year, with Allen himself at the throttle. Allen was then twenty-seven years of

age. Shortly before his death, which occurred only eleven years ago, he wrote concerning that event that he had never run a locomotive or any other engine before or since that time. This locomotive proved much too heavy for the track and therefore did not come into service. The track consisted of a  $3\frac{1}{4}$  in.  $\times \frac{1}{2}$  in. wrought-iron strap rail, spiked to 6 in.  $\times 12$  in. hemlock stringers, which were supported at intervals of 10 feet by wooden blocks.

The Baltimore and Ohio Railroad was chartered in 1827, and the corner-stone was laid on July 4, 1828. The first section of thirteen miles was opened on May 24, 1830, and it was here, on August 28 of the same year, that Peter Cooper ran, with his own hands, the first locomotive constructed in America. It was a crude, hastily improvised affair, weighing less than one ton, built under Cooper's direction, and called the "Tom Thumb." The boiler tubes were made of musket-barrels. The trial was merely an experiment to test the capability of a locomotive on sharp curves, which was amply demonstrated. But horses were continued as the sole motive power until shortly after the famous competition instituted by the company in 1831 for locomotives of strictly American manufacture. "York," designed by Phineas Davis, carried off first honors and the prize of \$4000. It had been stipulated that the weight of the locomotive, ready for service, should not exceed 3½ tons, and that preference would be given, other things equal, to the engine of the lightest weight. The specified load was 15 tons, to be drawn at a speed of 15 miles an hour on a level stretch. The sharpest curve had a radius of only 400 feet.

The honor of having been the first railroad in the world designed from the start exclusively for locomotives and the first exceeding 100 miles in length belongs to the South Carolina Railroad, built from Charleston to Hamburg, opposite Augusta, a distance of 136 miles. Chartered in 1827, construction was not begun till two years afterward, under the direction of Horatio Allen as chief engineer. Allen advised in favor of the new motive power on the broad ground that he saw greater possibilities in the development of the iron horse than of its four-legged cousin. The first locomotive built in America for actual service, the "Best Friend," made its successful debut on this road early in 1831. It was designed by E. L. Miller, built by the West Point Foundry, but came to an untimely end through the explo-

sion of its boiler, the negro fireman having innocently fastened down the lever of the safety-valve.

The first passenger train in America deserving of that designation was hauled on the Mohawk and Hudson Railroad from Albany to Schenectady, on August 9, 1831, the second anniversary of Allen's trip. The engine was the famous "De Witt Clinton," built by the West Point Foundry; the distance, about sixteen miles.

In Pennsylvania a number of tramways to the coal-mines had been built at an earlier date, beginning with the gravity road at Mauch Chunk in 1827. But the Philadelphia and Columbia Railroad, begun in 1829 and completed in 1834, was the first in this State designed for general traffic. Together with the Pennsylvania Canal and the famous Portage Railroad it established a continuous line of communication between Philadelphia and Pittsburg. The Portage Railroad, one of the boldest engineering achievements of its day, should not be forgotten in this recital. It was located by Moncure Robinson, late honorary member of our Club, who was retained as Consulting Engineer during construction, from 1830 to 1835, with Sylvester Welch, Principal Engineer. The total length was 36 miles. The Allegheny Mountains were crossed by ten levels and ten inclined planes, operated by steam hoists. The ascent from Hollidaysburg to the summit was 1339 feet in 10 miles, and the descent to Johnstown 1171 feet in 26 miles. Its chief features, otherwise, were an 80-foot masonry arch spanning the Connemaugh, destroyed during the Johnstown flood, and a tunnel 901 feet long—the first railroad tunnel in America.\* The old Portage road was abandoned in 1855, the year after the completion of the Pennsylvania Railroad from Philadelphia to Pittsburg.

The early English locomotives, imported in America, proved, for the most part, dismal failures. By reason of their weight and their rigidity they were adapted only to substantial road-beds, comparatively straight and level. In this country the cost of such construction was prohibitive. The Liverpool and Manchester Railway was built at an expenditure exceeding \$100,000 per mile. The cost of the early railroads in

<sup>\*</sup>The first tunnel in America was constructed in 1818-21, on the Schuylkill Navigation. Its length was 450 feet; width, 20 feet; height, from canal bottom, 18 feet. "Even the name of the engineer who located and built it is not known." Drinker's "Tunneling." Mr. Edwin F. Smith informs the writer that this tunnel was built by George Duncan, a Scotch engineer.

America, with some exceptions, was scarcely one-tenth that sum. The problem on this side of the Atlantic was to quickly open up a vast, sparsely settled country with the limited means at hand. Steep grades, sharp curves, and light uneven tracks were inevitable. Substantial iron rails were too expensive. Strap-iron, spiked to wooden longitudinals, supported on stone or timber, was the best substitute available. These iron straps, cut to miter-joints, soon wore loose and not infrequently curled up, and forced their way through the carbottoms. They were called "snake-heads," and became in time a serious menace to the safety of the train and individual passengers.

Effective remedies became imperative, and native ingenuity was equal to the occasion. The double problem of distributing the weight of the locomotive on six instead of four wheels, and at the same time increasing its lateral flexibility, was solved by Jervis' swiveling truck as early as 1832. The equal distribution of the load upon the wheel base on an uneven track, and vertical flexibility in general, were effected through Harrison's invention of the equalizing lever in 1837. These features, since copied extensively in Europe, were for many years the distinguishing characteristics of American locomotive practice. Space forbids mention of the important improvements originated by James, Winans, Baldwin, Norris, and other American inventors.

As early as 1840 Norris, of Philadelphia, delivered in England the first four of eight locomotives ordered by the Birmingham and Gloucester Railway, to operate the three per cent. Lickey incline, two miles long—a feat which no English locomotive could accomplish. The first trial with the "Philadelphia" was so successful that it resulted in a second order for sixteen locomotives.

Mathias Baldwin built his first locomotive, "Old Ironsides," in 1832. During the year just past the Baldwin Works sent its output of 1200 locomotives, weighing not far from 100,000 tons, to all corners of the globe. The acceptance of "Old Ironsides" became a matter of serious concern because its contract weight of 5 tons had been exceeded by nearly one-half. Our locomotives have now attained an extreme weight, including tender, of nearly 200 tons.\*

<sup>\*</sup>The heaviest locomotive in the world to-day is one of the "Consolidation" type, belonging to the Pittsburg, Bessemer, and Lake Erie Railroad. Its weight, including tender, ready for service, is 195.7 tons.

During the five years from 1830 to 1835 the railway mileage in the United States had increased from 30 to 1098; at the close of the century it stands, in round numbers, at 190,000, exclusive of second tracks and sidings. In striking contrast with the gigantic consolidation of our day, it is interesting to recall that a half-century ago the line from Albany to Buffalo and Niagara was divided between a dozen different companies.

The general type of the modern American locomotive became well defined in 1836 with Campbell's eight-wheel engine with its two pairs of coupled drivers and swiveling truck. The changes since that time have been but so many steps in the general scheme of evolution to latter-day perfection. To pursue these further would go beyond the scope of this review.

At the beginning of the railway era in England it was seriously proposed by some extremists to fill up the canals and to convert them into railways. A few years later the reaction had set in. The Liverpool and Manchester Railway found that a freight charge of about six cents a ton-mile between its terminals barely covered the cost of service.\* The annual repair charges on locomotives alone amounted to two per cent. of the total capital stock. Fairbairn (Henry) published a treatise in 1836 adducing figures in proof of the proposition that the new mode of locomotion was ten times as expensive as horses, and that it was folly to persist in its employment. Perhaps no brief statement could place the conditions then and now in stronger contrast.

With the application of steam to manufactures and transportation the field of engineering assumed a scope before undreamed of. New problems arose at every turn demanding some solution, however crude. Ingenuity and good judgment, aided by experimentation, accomplished much; but there were borders that could not be passed till science lent her powerful hand. Without detracting one whit from the glory of these earlier accomplishments—on the contrary, to the everlasting credit of their authors—may it be asserted that engineering had little scientific basis before the middle of the nineteenth century.

<sup>\*</sup> As an extreme example of low freight-rates on American railroads at the present time, it may be stated that during the year ending June 30, 1900, the Chesapeake and Ohio Railroad carried coal profitably at the average rate of 2.02 mills per ton-mile.

Though Black had enunciated his doctrine of latent heat before Watt's time, the beginning of exact knowledge concerning the relation between heat and work dates from 1824, when Carnot founded the science of thermodynamics. Its sound development became possible only after Joule's experimental derivation, in 1843, of the mechanical equivalent of heat. This paved the way in turn for the profound researches of Clausius, Rankine, Lord Kelvin, and others, with their far-reaching consequences to steam-engineering practice.

The application of the laws of elasticity to simple beams was but vaguely recognized until Navier's studies appeared in 1824, and the problem was not completely solved till Saint-Venant supplied the missing links in 1853—nearly two centuries after the discovery of Hooke's classic law. The development of the theory of columns was, in a general way, concurrent with that of beams. The foundation was laid by Euler in the eighteenth century; a correct, though special formula was derived by Tredgold early in the nineteenth, but its value was not perceived until resurrected by Gordon a half-century later, and by him applied to the results of Hodgkinson's famous tests, and developed finally into its general form by Rankine. These results were not achieved, however, without the contributions of a long line of eminent elasticians. The process was one of gradual evolution, extending over several centuries.

The theory of stresses in framed structures presents a far more remarkable history in that it dates back only to 1847, when Squire Whipple, of Utica, N. Y., published the first correct analysis, as a part of two "essays" on bridge building. This work, covering 120 printed pages and 10 plates of illustrations, will ever remain one of the most noteworthy contributions to engineering literature. In the whole history of engineering there is perhaps no fact more curious than that up to about fifty years ago bridge building stood upon a purely empiric basis, not only in America, but throughout the world. The safety of a new design and its merit compared with other types could be determined only by the crude process of subjecting models to actual tests. The attainment of a correct and economic distribution of the material throughout all parts was obviously impossible. The security of these earlier structures lay largely in the fact that they were mostly of a composite type, so that the weakness of a single member did not necessarily destroy the integrity of the whole fabric.

withstanding this lack of exact knowledge concerning the special functions of each component part, the building of wooden bridges was developed to a high degree of excellence, and notably in America by Palmer, Burr, Wernwag, Town, and Long, whose work has survived, in part, to this day. Wernwag's "Colossus" bridge, built across the Schuylkill at Fairmount, Philadelphia, in 1812, and destroyed by fire in 1838, had the remarkable span of 340 feet 3½ inches.

The later products of American bridge building—beginning with the works of Howe, Whipple, and Pratt, and closing with achievements which need not here be specified—may challenge comparison with the world for their intrinsic excellence. At the same time it is only too apparent that little more than a beginning has as yet been made in this country in the development of what may be called "bridge architecture": the art which finds expression chiefly in the effective design and embellishment of piers and approaches, in harmony with the structure as a whole—its purpose and its environment. This admission may be made the more unreservedly since hopeful evidences are not wanting that a turning-point has come, and that in future the immediate utilitarian ends will be less narrowly kept in view. Again, it should in justice be acknowledged that America's contribution to the development of the theory of stresses has been relatively insignificant.

No review, however cursory, of nineteenth-century engineering can be made without recognition of the tremendous debt it owes to metallurgy. The obligation is indeed a mutual one, for marked progress could not have been achieved in either practice save through the stimulating impulse of the other. To appreciate in some slight measure the advance of iron metallurgy within modern times, let it be remembered that the first cast-iron bridge in Europe was not built till 1776,\* and the first in America probably not before 1840.† The manufacture of cast-iron on a larger economic scale became possible

<sup>\*</sup>This bridge, spanning the River Severn in England, at Coalbrookdale, was designed and built by Abraham Darby. It is a circular arch with a span of 102 feet and a rise of 45 feet. It was built in 1776-79 and is still in service.—Mehrten's "A Hundred Years of German Bridge Building," Berlin, 1900.

<sup>†</sup> See letter of Squire Whipple, "Railroad Gazette," April 19, 1889.

only after Neilson's invention of the hot blast in 1828. The superior merit of wrought-iron for constructive purposes did not become fairly established till toward the middle of the century. This metal had hardly gained its ascendancy before a new and mightier competitor arose which now commands the field. Thus metallurgy has created three great epochs in constructive engineering, virtually within the span of a single century.

The indebtedness of modern engineering to the so-called abstract sciences is so obviously universal that no specific evidence need be adduced. Indeed, in a broad sense, it may be said that every step in its development and every detail in its practice represent, directly or indirectly, the useful exploitation of some principle or discovery of science. Nor should it be forgotten that the most far-reaching practical results have not infrequently had their source in scientific observations which, even to the most acute, seemed at the time to hold little or no promise of future usefulness.

The rise of engineering to a truly professional plane may be gaged perhaps more accurately by its schools, its literature, and its organizations than even by its works. A few historical notes along these lines may, therefore, be of interest.

Excepting West Point, the Rensselaer Polytechnic Institute, Troy, N. Y., is the oldest engineering school in any English-speaking country. As the Rensselaer School, it was founded in 1824 by the Honorable Stephen Van Rensselaer with a view of giving instruction, to quote his own words, "in the application of science to the common purposes of life." The small interest in science at that early period is well shown by the fact that at about that time the University of Pennsylvania abolished its department of natural science, after a languishing existence of eight years, on the ground that the establishment of the Franklin Institute (1824) rendered "such a department in the University 'unnecessary.'"\* The first class in civil engineering was graduated at the Rensselaer Institute, as it was then called, in 1835. Until the reorganization of the school under its present name, in 1849, and the consequent expansion of its course to three years, a single year sufficed for obtaining the

<sup>\*&</sup>quot;Historical Sketch of the University of Pennsylvania," John L. Stewart, U. S. Bureau of Education, Circular No. 2, 1892.

degree of Civil Engineer; in fact, it was announced that college graduates might succeed in earning it in twenty-four weeks.\*

At the close of the Civil War there were only six institutions in the United States engaged in teaching engineering, exclusive of West Point, with a joint total of scarcely three hundred graduates from their beginning.† Since then, the number of schools of all grades in which engineering courses are offered has been swelled to a total of upward of a hundred, and the number of graduates for a single year exceeds fifteen hundred.

Turning now to the engineering societies, the first attempt in America to form an organization of engineers was made in 1839, but proved a failure. The impulse originated in Augusta, Ga.; a convention was held in Baltimore; a committee was appointed to arrange the preliminaries for a national organization; this committee met at the Franklin Institute in Philadelphia; it prepared the draft of a proposed constitution which was never adopted; and with this the movement came to an untimely end.

To the Boston Society of Civil Engineers, instituted on July 3, 1848, belongs the credit of being the first organization of the kind in the United States. Despite a very small membership, its affairs were fairly prosperous till 1855. After that the attendance at meetings fell to such an ebb that a quorum was seldom present. Before the resurrection of the Society, in 1874, no meetings had been held for a period of thirteen years.

Second, in chronological order, and not least in point of interest, is a private engineering society which held weekly meetings in Brooklyn as early as 1851. Its euphonious appellation, the "Wa-ca-ma-ha-ga," was coined from the initial letters of its six founders' names. Over this curious signature so-called "Indianeering" notes were for a time contributed to a technical journal edited by one of their number. The members of this Club were particularly active in the subsequent organization of the American Society of Civil Engineers, and later in its

<sup>\* &</sup>quot;History of the Rensselaer Polytechnic Institute," Palmer C. Ricketts.

<sup>† &</sup>quot;Engineering News," August 4, 1892.

<sup>‡ &</sup>quot;Historical Sketch of the American Society of Civil Engineers," C. W. Hunt.

<sup>% &</sup>quot;Historical Address by Desmond Fitzgerald," "Journal of the Association of
Engineering Societies," vol. XXI.

reorganization. Among its fourteen members, no less than five became presidents of the national society and several, vice-presidents and other officers.\*

The American Society of Civil Engineers was founded in 1852. Although organized as a national society from the start, it led at first a most precarious existence, in singular contrast to its present state. Thus the average attendance at meetings was six for the first year and less for the second. From 1855 there came a twelve-year period of "suspended animation," during which no meetings took place. The useful life of the Society dates practically from its reorganization on October 2, 1867. Its first publication did not appear till five years later. The Boston Society began to print its papers in September, 1879, or about six months after the first appearance of our own Proceedings.

There are at present sixty to seventy or more flourishing societies in the United States devoted to the promotion of engineering, or closely cognate interests, by holding regular meetings and publishing their proceedings. Among these, scarcely ten have been in existence over twenty years.

To American engineering journalism perhaps no higher or bettermerited tribute can be paid than that it has kept squarely abreast, and often in the van, of this quick tide of progress, feebly evidenced by the records already cited. A new form of engineering literature has lately arisen, engaged in a praiseworthy and most successful effort of presenting engineering topics in a form suitable to the understanding of the intelligent layman, without detracting from their essential dignity and worth.

The quickening of popular interest in our profession has found expression in more substantial form by the erection of new technical schools or the development of existing ones, through private beneficience or public aid, on a scale undreamed of by a preceding generation. To us, as most immediate beneficiaries of this bounty, it comes as but a single token of added individual responsibility, which we should strive to justify by every power that lies within us. Let us contribute, to the measure of our talents and our opportunity, to the advancement of that honorable profession in which we hold common

<sup>\* &</sup>quot;Engineering News," Sept. 10, 1887.

interest and common trust. Let past achievements serve as inspirations; but let the thought be uppermost that future works are to be measured by ever higher standards, which we ourselves must set.

## AMERICAN ISTHMIAN CANALS.



A Topical Discussion, November 3, 1900.

## THE TOPOGRAPHY AND HYDROGRAPHY OF THE ISTHMIAN REGION.

#### JAMES CHRISTIE.

Last spring I had the pleasure of presenting informally to the Club a historical sketch of the various projects that have been proposed for a ship-canal across the American isthmus. The present discussion will be limited to the technical and descriptive features of the subject. I shall leave many details for others to discuss, confining my own remarks to the general aspects.

Let us first examine the map of Central America, and consider the topography and hydrography of the long strip of land connecting the continents. Embraced within a distance of 1500 or 1600 miles, between the gulfs of Campeachy and Darien, are situated all the routes that have ever been proposed for locating a connecting shipcanal. Starting at the most northerly, we can enumerate them as follows: Tehuantepec, Nicaragua, Panama, San Blas, San Miguel, and, most southerly of all, Atrato. At the points enumerated exist either depressions of the Cordilleras or else least distances between oceans, which seem to present so many comparative advantages for each particular scheme, as rendered it seemingly attractive to the advocates of that route. This whole length of land bears nearly normal to the trend of the northeast trade-winds, and is wholly within their influence for a large part of the year. When the sun is in its southerly course, the northeast trades blow constantly on this coast and traverse it, reaching well beyond into the Pacific. In our spring and summer, when the sun is northerly, the equatorial calms and rains are drawn over Central America, and the well-known rainy season occurs. This movement begins earlier and lasts longer at the lower end of the isthmus, where the rainfalls are usually heavier and the calms or baffling winds continue longer and are more persistent.

In addition to the ordinary phenomena of the trade-wind movement, monsoons occur, according to Maury's charts, especially in Panama Bay. This alternation is probably due to the southwest trades, driven northward by local influences and taking a northerly or northeasterly course, as seems to be usual with monsoons. Maury's charts show the equatorial calms as being deflected northward out of their usual parallel at the upper Pacific coast of South America. If this is correct, it then follows that the calms or baffling winds of the equatorial doldrums would begin earlier, be more persistent, and last

#### MAP OF PROPOSED LINE OF NICARAGUA CANAL

much longer on the lower than on the upper coast of Central America. This subject is only mentioned here because it has in the past created, and does still create, considerable discussion between the advocates and opponents of the southerly routes, especially the Colon-Panama route.

It seems to be a fact that sometimes long periods of calms occur in Panama Bay, and it is on record that sailing vessels have at times been detained for several months, but, according to some navigators, the detention is only occasional and is not serious. Possibly both contentions are correct to some extent. It will be remembered that

the monsoons of the upper Pacific coast of South America are not true monsoons, similar to those of the Indian Ocean: the forces that create them are not of so positive and permanent a character as the latter; even these sometimes fail, whereas the monsoons in question may frequently not have a protracted recurrence or, if so, only in a very mild way.

Throughout the whole district of Central America the mountain range or Cordilleras lie, as a rule, toward the southern or Pacific coast. The rainfall, which is very great in the wet season, is much heavier—approximately double—on the northern slopes than on the Pacific slope, consequently the largest and most important rivers flow

toward the Atlantic coast. The average rainfall is also heavier at the lower end of the isthmus than at the upper or northern end of Central America. The tides are much greater on the Pacific side than on the Atlantic; on the latter coast they are quite insignificant, whereas the tides at Nicaragua on the Pacific frequently have a movement of from eight to fifteen feet. At Panama Bay the tides run higher; the ordinary tide is twelve feet, and full spring tides over twenty feet; occasionally extreme tides are recorded much higher than this.

In the dry season, when the sun is toward the southern tropic, the rainfall is insignificant; the rivers dwindle, and at no point, excepting in Nicaragua, does a natural storage of water exist capable of supplying the locks for an active traffic. Therefore, at all the routes where locks are required, excepting Nicaragua, it will be necessary to create artificial reservoirs for the storage of water. On the other hand, in the rainy season, these gentle streams become raging torrents, and one of the most serious problems has been how to control or dispose of the enormous rush of water that annually occurs and occasionally comes in overwhelming quantities.

Before reviewing the present studies of the Nicaragua and Panama schemes, it is well to bear in mind that if a deep waterway should be created between the lakes and the Mississippi, as would appear to be quite probable, and when navigation between the lakes and the Gulf of Mexico is so controlled and improved as to become an important route for ocean-going vessels, it is quite probable that then the subject of the canal via the Coatzocolcos River and Tehuantepec would become a project of great importance. A glance at the map, tracing the connection between the mouth of the Mississippi and the Pacific ports of the United States, will demonstrate this.

Passing down to Nicaragua, the existence of the lake at the moderate elevation of 110 feet above sea-level has always served to render this an attractive situation for a canal. The project has been entertained for hundreds of years, dating back to the earliest Spanish settlements, although it has been more actively and persistently urged since the close of our Civil War, and more especially by the naval officers who have examined and surveyed the route; this, notwith-standing that it presents the longest distance between oceans of any of the various routes, being 168 miles from Greytown to the port of

Brito on the Pacific, and also notwithstanding that no natural harbors exist at either end, but have to be created and maintained.


Passing over the various methods which have been proposed in the past for constructing this canal, some of which involved damming the San Juan River at several points, we may briefly review the proposition of the last company who had undertaken the work, and, failing to receive the anticipated national support, were compelled to abandon it. Their plan was to dam up the San Juan River a little below the confluence of the San Carlos, bringing the level of the San Juan River up to that of Lake Nicaragua, and possibly also raising the level of the latter a few feet. At the Atlantic end the canal was to leave the river above this dam, following an artificial excavation, and a series of three locks, respectively of 45, 31, and 30 feet lift, were to be constructed to raise or lower vessels between the respective levels of the ocean and the lake. On the Pacific side an artificial cut was to be made from the lake to Brito, with a spillway and three locks near the cost, corresponding to those on the Atlantic side.

The principal excavation would be at two points: One cutting through a range of hills between the dam and Greytown, involving the removal of about 7,000,000 cubic yards of rock; the other, a similar work between the lake and the Pacific, of 6,000,000 yards.

The amount of excavation involved by this route does not present any serious difficulty or expense, the principal difficulties arising from the San Juan dam and from the embankments that would have to be created where the natural depressions occur, and from the difficulty of securing suitable foundations for the locks. These difficulties are so great and are viewed so differently by engineers that the last commission which reported on the subject nearly doubled the estimate of cost above that reported by their predecessors:

The existing Walker Commission, which has made a long and careful examination, will shortly report on the subject. We can not anticipate its opinions, but it has been asserted in the press that, failing to find a proper foundation within a hundred feet of the existing river level, it may propose the location of the dam elsewhere. The accompanying profile indicates the work proposed by the last canal company.

The advantages and disadvantages of the Nicaragua route would seem to be as follows. Advantages: northerly course, involving the

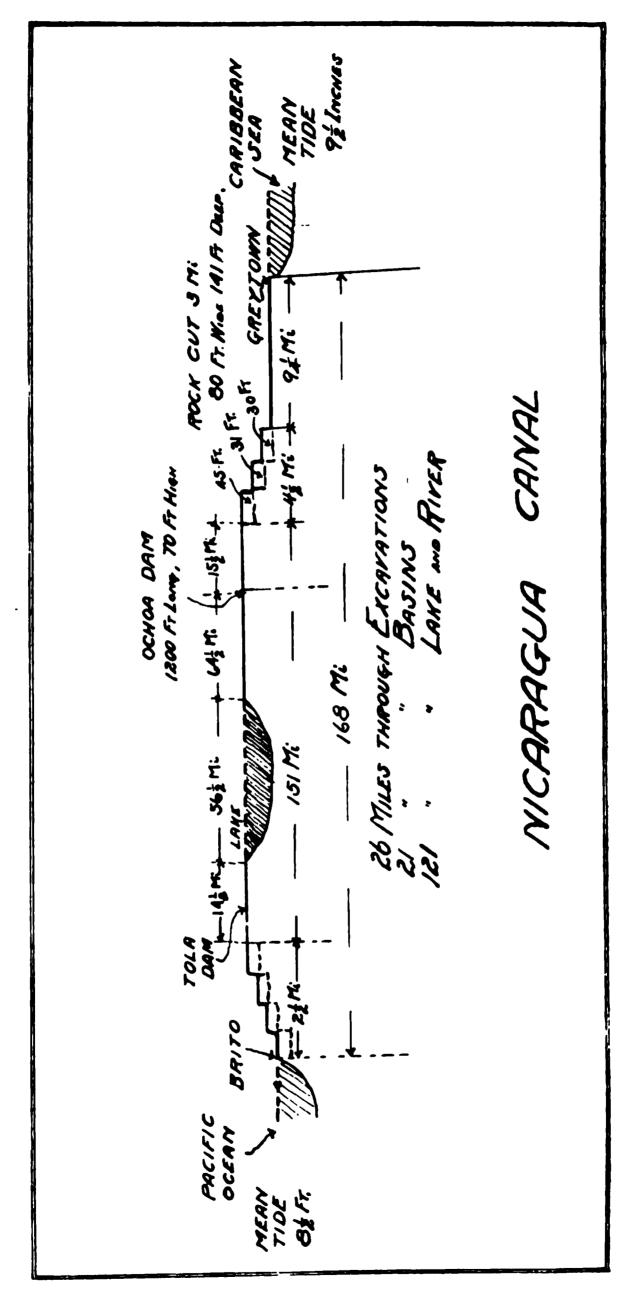

shortest route on the Pacific side for northerly bound traffic. The existence of a lake as a source of supply for the locks proposed, and also as presenting a large navigable body of water over which steamers could travel at ordinary speed. The internal trade of Nicaragua, may develop into one of considerable magnitude. The lake might also be used as a rendezvous for war-vessels, offering a fresh-water basin and a salubrious climate.

The disadvantages are the absence of natural harbors and the possible expense in maintaining them when artificially constructed. The long route to be traversed, which, at the rate of four miles an hour and the delays in lockage, might require over two days to make the passage. The difficulty in securing a desirable location for the construction of a safe and permanent dam and also for locks, and the possibility of these being injured by earthquake disturbances. The problem of protection from the ravages of the San Carlos River, which at time of floods carries quantities of silt and might load the canal with detritus, unless this river is provided with an artificial outlet to discharge its waters below the dam, or unless a suitable site for the dam can be found above the outlet of this river; also the curving track vessels would have to follow, owing to the tortuous course of the river between the dam and the lake.


It will be remembered that any projects to be considered for a ship-canal at this time must consider the passage of vessels in a depth of water little less than 30 feet, and locks little, if any, shorter than 700 feet.

Passing down to Panama Bay and considering the Colon-Panama route, it is unnecessary for us to dwell long on the plan proposed by the De Lesseps Company for a sea-level canal at this point. Here the distance between oceans is only 43 miles, or, considering the excavation required in the bay on the Pacific side, the total length of canal would be about 46 miles.

Some twenty years ago the late M. De Lesseps, bearing the prestige and honor bestowed upon him for the successful work completed at Suez, essayed to add to his renown by accomplishing a similar work at the American isthmus. He summoned a commission of eminent engineers to assemble at Paris, where the subject was lengthily investigated and discussed. Throughout the whole proceedings the individuality of De Lesseps evidently dominated and controlled the final

judgment. It was there decided that the canal, if constructed, must be at sea-level, without locks, and that it must be an open cut—that is, not to pass through a tunnel. Manifestly the only point in the isthmus where this could be effected without enormous cost was at Panama, where the summit of the Cordilleras is only about 300 feet above sea-level, whereas further down, at San Blas or San Miguel, the elevation of 1200 or 1500 feet for several miles would almost necessarily imply the use of a tunnel. De Lesseps, with a commission of eminent engineers, visited the isthmus, and with the enthusiastic sanguine nature of the man, declared that the work contemplated was easier to execute than that of Suez. He decided to start from Colon (Aspinwall), in the Bay of Limon, and cut across a few miles into the valley of the Chagres River, as this river discharges into the sea several miles north of the Bay of Limon. The canal here displaces the river from its bed, which was to be deepened, and the canal was to follow this valley to a point where it swerves to the south, where a gigantic dam was to be constructed for controlling the flood-waters of the river, which would then be diverted by another channel to the ocean. Thence the canal would pass through the dividing ridge at Culebra, requiring a cut over 300 feet deep, opening thence into the valley of the Rio Grande, and following that to the Panama, using a tide lock for controlling the flood of the tide on the Pacific side. Indicative of the magnitude of this undertaking, which involved the changing of rivers from their natural beds, was the magnitude of the storage dam, designed to be constructed in the Chagres Valley above Matachin. This dam was to be a mile long at its crest, to be about 130 feet high, and was designed to store about 1,000,000,000 cubic meters of water, and was estimated to cost about twenty millions of dollars. The whole cost of the canal was estimated at about one hundred and seventy millions of dollars.

Shortly after the beginning of the work De Lesseps, who was then a very old man, apparently passed into senility, and the work fell into the hands of schemers and speculators, who inaugurated a system of peculation and fraud, revelations of which almost caused a revolution in France. A sum much exceeding the estimated cost of the completed canal was spent with comparatively little result. The matter was taken into the French courts, and passed into the hands of a new corporation, known as the New Panama Canal Company.

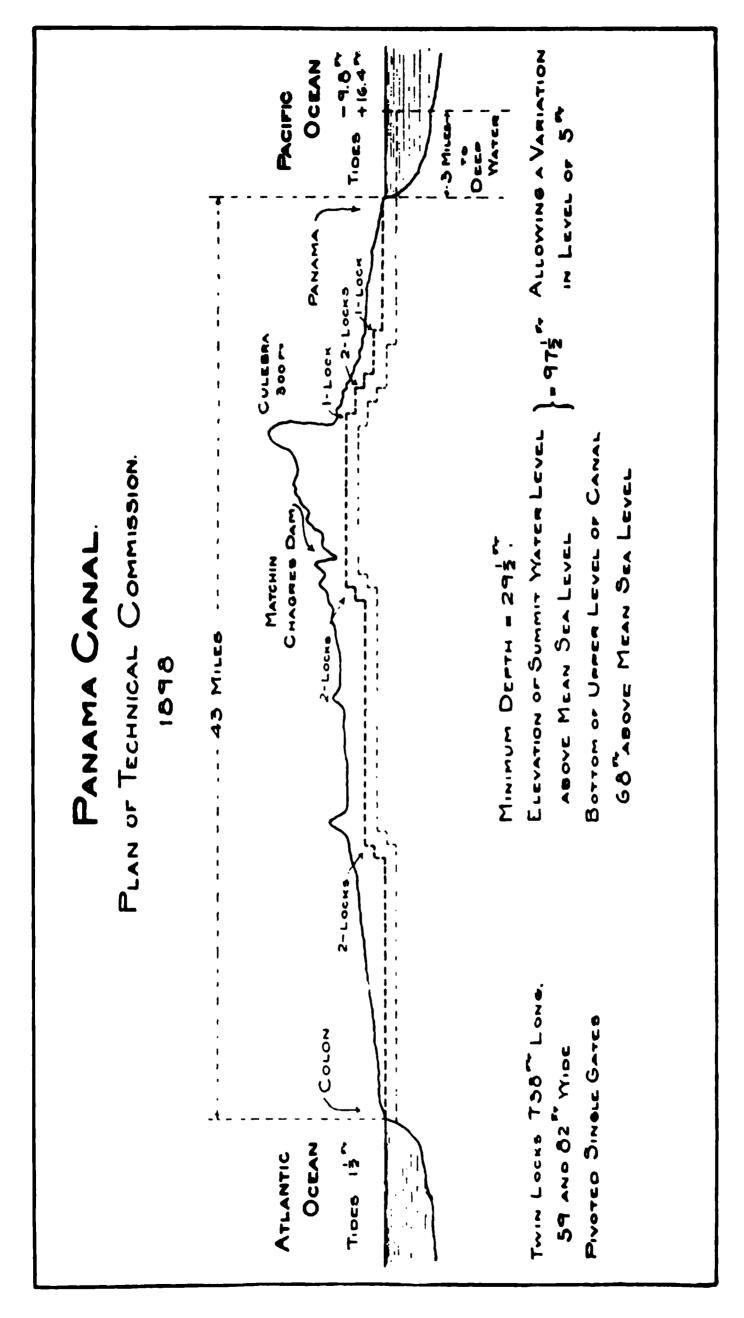

This corporation evidently proceeded with considerable care and deliberation. A commission of engineers of several nationalities, and of established reputation, was created, with instructions to make a new study of the problem. This commission, after many sessions during a year's time, recommended the abandonment of the sealevel canal, and instead thereof proposed to put in a system of locks, either for one or for two upper levels. The difference in the estimated cost of the one or two upper level schemes appeared to be little, as compared to the whole cost of the canal; the object of the third level apparently being more to save time than expense, as there was danger of the time-limit for the concession expiring, and it had already been extended by the Republic of Colombia. The French company has prosecuted the work with considerable vigor, and this year has had a large force of men employed on the isthmus, and urgently requests the United States Government to consider the work that has been, and is being, done there, before undertaking a canal elsewhere. A general outline of the plan now being followed is shown on the accompanying profile, the proposition being to build a dam and a storage reservoir on the Chagres Valley, several miles above its intersection with the summit level of the canal. From this dam a feeder will be provided for supplying water to the summit level, and a lateral channel provided for the outflow of superfluous water in the rainy At the second level on the Atlantic side a lake will be created, the extended area of which will provide for flood water and tend to preserve uniformity of level of the canal. The French engineers estimate that at the present time nearly one-half of the total work required is completed, and that a further expenditure of less than one hundred million dollars is required to complete the canal.

The Walker Commission has carefully examined this work. Its report will shortly be made public, and is looked for with considerable interest. The duty of the Commission is to recommend to the national government the most desirable location for a canal. It is to be hoped that Congress will be guided by the report and not by any preconceived ideas in favor of any particular plan or route, and will take proper steps to provide a canal, according to the recommendation of the Commission.

The advantages of the Panama route would seem to be, first, the short length of land-locked water route. Its distance from New York

via the Windward passage differs little from that of Nicaragua. Of course, the run northward on the Pacific side would be greater by several hundred miles than by the Nicaragua route. There are better natural harbors at Panama than at Nicaragua. The vertical height to be locked, according to the recent Panama plan, is nearly the same in both cases. An objection to Panama is found from the prevalence of calms or baffling breezes at certain seasons of the year in the Bay of Panama, as previously described. This, of course, would only affect sailing vessels. Another objection which arises, largely political, is that the United States Government is invited to purchase stock or become a shareholder with the French company in this canal, as the company, under the concession, can not transfer its rights.

There are still many zealous advocates of the San Blas and the San Miguel routes, these being the shortest in distance between the oceans, and both possible without traversing the channel of important rivers, but both unfortunately involve a passage through the Cordilleras where the mountains attain a considerable elevation. A sea-level canal at either of these locations would possess the great advantage that it could be widened from time to time as the traffic justified the expense.

If a water channel 300 or 400 feet wide could eventually be provided, a speed of ten miles an hour could be maintained during the passage, enabling steamers to pass through in a few hours. In such an event a tide lock would probably be unnecessary. Considering the rapid growth of the traffic at Suez, which, after an existence of thirty years, has now an annual traffic of 10,000,000 tons, with a revenue of eighteen million dollars, it requires no flight of imagination to foresee these quantities being exceeded at a canal through the American isthmus before the middle of the coming century; therefore a commodious canal in the most convenient location should be the first consideration, and let cost be subservient thereto.

Late events demonstrate more clearly than ever, both from a political and a commercial point of view, the urgent need of opening the canal, and the nation must be prepared to spend several hundred millions of dollars, if needed, to obtain the best that is practicable.

# THE ENGINEERING FEATURES OF THE NICARAGUA ROUTE.

#### EDWIN F. SMITH.

A WRITER on the subject of an Isthmian canal, some thirty years ago, said: "We have spoken of the piercement of the American isthmus as an international work. It should rather be the work of American energy, American talent, and American money. It is part of the American continent. No foreign nation can have the same military control of it that Great Britain now has of the Suez Canal. . . . . . The benefit of its construction, although shared by the maritime powers, will be most important to the Americas; and, by reason of resources, organization, and position, especially to the United States."

These reasons are as strong to-day as they were when urged thirty years ago, in support of the control by the United States of a canal connecting the Atlantic and the Pacific. Much time has been spent in the intervening years in examinations in the field, and in investigations to determine the best possible route; and right here it may be said, in explanation of the seemingly slow progress made, that the location of a ship canal across the Isthmus on a line combining safety and permanence of the works with economy in first cost and in future maintenance offers problems in engineering that are far more difficult of solution than were those presented in the location and construction of any of the transcontinental railway lines, great and enduring as they are as monuments of engineering skill.

With the exception of the Panama route, no Isthmian project has received such careful examination as the lines passing through Lake Nicaragua. It is the shortest practicable route yet found between the Atlantic and the Pacific seaports of the United States. Therefore it is the best route, provided the works can be made permanent, and safe against torrential rains, floods, and seismic disturbances.

The modern cargo-carrier of to-day, especially on the Atlantic, is a costly ship compared to what it was in the days when an isthmian canal was first agitated. In the passenger service the limit has apparently not been reached in steamers of 750 feet length, 76 feet beam, and 30 feet draft. These dimensions have not as yet been equaled by freighters, nor is it to be expected that they will be in the near future;

nevertheless, they are so large and costly that the necessity already exists of keeping them constantly employed. Their sailing route from port to port must be shortened as much as possible, and the time of discharging and taking on cargo in port must be reduced to the minimum.

Manifestly, such costly vessels as our modern Atlantic freighters can not profitably be employed in competition with the transcontinental railways on the exceedingly long route around Cape Horn or through the Straits of Magellan. For the best development of the commerce not only of the United States, but of the whole world, a shorter route is needed between the Atlantic and the Pacific, and all the indications seem to point to the Nicaragua Canal as being the one most in favor.

The following table will illustrate the great saving in distance which would be effected were the Nicaragua Canal built and in useaswing which would have an immense influence upon commerce between the Pacific coast and the East and the markets of Europe:

FROM SAN FRANCISCO TO	VIA CAPE HORN.	VIA NICARAGUA CANAL.	Distance Saved.
New York,	14,840	4760	10,080
	14,690	7508	7,182

I have time to refer only thus briefly to the saving in distance via Nicaragua, leaving to others the comparison of isthmian routes, and their effect upon American and European competition in the markets of the far East and of South America, and will confine myself to a few brief remarks upon the feasibility of the Nicaragua Canal, and some of its engineering features.

The feasibility of the project, as far as is now known from the published reports of surveys, depends on the control of the lake level, the dam in the San Juan River, the maintenance of the divide cut, and the embankments on the eastern division.

Lake Nicaragua.—From the report of the Nicaragua Canal Commission, 1897–1899, we learn that: "It is an interesting and peculiar feature of the route that in early geologic time the lake was evidently an arm or bay of the Pacific Ocean, while the Continental Divide

traversed the isthmus to the eastward in the vicinity of Castillo Viejo, and the Rio San Juan, as an outlet of the lake, had no existence. This is attested by the remains of an old river channel, of large dimensions, which crossed the Western Divide and formed the outlet of the lake after it became separated from the ocean, and by other geologic features."

Some of the physical data which are of the most importance in the consideration of problems of water-supply, lake regulation, storage, and operation we learn from the report of the Commission are as follows:

The general features of the Nicaragua Canal embrace, as stated by the Commission:

First.—The division between the Pacific and the lake—called the western division.

Second.—The lake itself.

Third.—The division between the lake and the Caribbean Sea—called the eastern division.

It would be both unfair and premature to enter upon a critical review of the work of the Nicaragua Canal Commission, which is still engaged in the solution of the vast problem of an economic and safe route.

Those who are at all familiar with the Childs and Menocal surveys and plans can, however, see at a glance that important changes have been made by the Canal Commission, 1897-99, and these for the betterment of the route and the safety of the projected works.

I will endeavor to go over the subject briefly, noting the changes which have been made:

Dimensions of Canal.—The prism of the artificial water-way, or the canal, has been considerably enlarged over that of any previous project. This is a move in the right direction. Indeed, I have no

hesitation in saying that had the canal been built on the lines laid down by Childs and Menocal, it would be useless to-day for any but vessels of moderate dimensions.

It is now proposed by the Commission that the canal shall nowhere be less than 30 feet in depth. The width to vary with local conditions as follows:

From Greytown harbor to Boca San Carlos, the bottom width to be 150 feet, with slopes in earth 1:1 and in alluvial silt 1:2. In hard rock, vertical sides up to 40 feet from the bottom; then slopes of 5:1. In soft rock the slopes to be 2:1.

In the river the width at bottom to be 300 feet with slopes of 1:2. The bottom width of the canal from the lake to the Pacific to be 150 feet, with slopes as on the eastern division.

The calculations for lake level are based upon a minimum elevation of 104 feet above mean sea-level, Caribbean Sea as a datum.

The locks are  $80 \times 30 \times 665$  feet between quoins, giving an available length for vessels of 620 feet.

Compared with the former projects the percentages of increase in the areas of the several cross-sections are as follows:

Canal proper,			•	•	•	•	•	•	•	•			•	•	•	9.1 per cent.
Through rock cut,	•	•	•	•		•	•	•	•		•	•	•	•	•	50.0 per cent.
In the river (in rock),	•	•		•	•	•	•	•			•	•	•	•		131.0 per cent.
In the river (in earth),			•		•	•				•			•			84.0 per cent.

These are all substantial increases in cross-section, and are absolutely necessary in view of the present dimensions of passenger and freight steamers, as well as naval vessels.

Regulation of the Lake Level.—It has always been admitted that the regulation of the lake level was a matter of vital importance to a canal by the Nicaragua route. Its surface has been known to fall as low as the level of 98 feet above mean sea-level, and to rise as high as 111 feet above the same datum, occurring at remote intervals, but nevertheless a standing menace to an uninterrupted navigation unless dealt with by the erection of proper controlling works for the regulation of the San Juan River, the natural outlet to the sea.

The effort in the solution of the problem should be to keep the level up to the highest practicable without incurring too great damages from the destruction of private property.

The Commission has wisely, I think, reached the conclusion that the lake may vary its level from elevation 104, the minimum, to 110, the maximum; and that spillway capacity of 50,000 cubic feet per second should be provided for regulation, and so arranged as to discharge 15,000 cubic feet per second into the Rio Grande River on the west side, and the remainder through the San Juan River on the east side.

The Western Division.—One of the weak spots of the Menocal project was the La Flor dam, which was designed to create an extension of the lake westward to within 4 miles of the Pacific Ocean, creating a basin 6.25 square miles in area, through which navigation by deep-draft steamers would certainly be easier than through a canal. The scheme, however tempting, was an unsafe one. It involved a high dam at La Flor, to hold the level of the lake at 110 feet above sea-level. crest would have to be about 110 feet above sea-level, while the solid rock is found at about 45 feet below sea-level, making a structure 165 feet high. Such a dam is, to say the least, utterly unsafe in a country liable to seismic disturbances, and it is therefore reassuring to those who are in sympathy with the Nicaragua Canal project to know that the Commission has abandoned it and adopted a route following the left bank or east side of the Rio Grande River, which plan, to use the words of the report, "presents no special engineering difficulties, enables good sites for locks to be selected (a most important consideration); and preserves for cultivation the fertile land bordering immediately on its banks."

The Lake Division.—The lake division will be apparently the same for any project.

The Eastern Division.—The weakness of the former projects for the eastern division centered in the Ochoa dam, the controlling works for the lake and the San Carlos River, and the San Francisco embankment line. The number of dams, large and small, was 67, and the total length of embankment line was about 15½ miles, at some places over 100 feet high, with treacherous foundations.

These difficult constructions contained an element of uncertainty which might eventually have led to the Nicaragua route being considered by vessel-owners an unsafe one, and the Commission has wisely entered into an exhaustive and careful survey of the entire east side between a point above the mouth of the San Carlos River and the sea.

The permanency of the canal depends more on the proper solution of the problem of location of this part of the line than on anything else, and until the Commission has finished its surveys and made its final recommendations, little can be known as to a definite location. It is an extremely difficult problem, and one requiring time, both for the field and office work.

As I have said before, it is much easier to locate a line of railway than a canal; there are fewer problems to be considered, fewer side issues to intervene and spoil what would otherwise be a safe location.

It is reassuring to know that the Commission has progressed so far as to abandon the Ochoa dam and select a site above the San Carlos, where good solid rock foundation can be obtained, for a dam of a maximum height of about 138 feet from its foundation, thus reducing the cost and difficulties of construction.

The change also in the number of locks on the eastern division is one which I am sure will be to the advantage of the canal if constructed. The new plans of the Commission contemplate six locks on the eastern division, of 18.4 feet lift each, instead of three, as formerly proposed. This will certainly add to the stability and permanence of the works.

The latest estimates of the cost of construction of the entire line of the Nicaragua Canal amount to about \$118,000,000, based upon liberal prices, and an ample allowance for engineering and administration during construction. The Commission, in its report, refers to the fact, which is an important one, that "the surveys have in general revealed better physical conditions than were hitherto supposed to exist, especially as to the amount of rock in the upper river, whereby it is possible greatly to reduce the estimated cost of construction." Nevertheless there are always unforseen difficulties and hindrances, as every engineer knows, so that it would not appear improbable that the estimated cost might reach \$135,000,000 (nearly), as stated by Colonel Peter C. Hains, in his minority report.

Even at the latter figure, in view of the high position which the United States will inevitably take among the maritime powers of the world, and the wonderful development which must take place in its commerce within the next quarter of a century, will it not be profitable to build, own, and maintain the Nicaragua Canal?

[Note.—Since the foregoing was written the preliminary report of

the Isthmian Canal Commission has been made to Congress, and unanimously recommends the adoption of the Nicaragua route upon broader lines and at a largely increased cost over the estimates of previous commissions. The report recommends a canal with a minimum depth of 35 feet throughout, a bottom width of 150 feet, and with locks 740 feet long by 84 feet wide. The estimated cost is approximately \$200,000,000.

As intimated previously, it would appear to be unwise for the United States Government to invest its money in a canal of any smaller dimensions, in view of the growing tendency to enlarge the size of ocean-going steamers.]

### THE PANAMA ROUTE.

LOUIS Y. SCHERMERHORN.

I DID not anticipate taking part in the discussion, but, since time permits, there are a few points to which reference should be made. We have become so accustomed to think of but two routes—the Nicaragua and the Panama—that it seems almost a foregone conclusion that the canal to be built will be on one of these two routes. This is not a proposition which it is safe to accept as true, for we do not know what the present Commission will report; and it is not certain that they will report in favor of either of these routes. Their duties require the Commission "to determine the most feasible and practicable route across the Isthmus for a canal," regardless of all previous action in this matter.

There are grave considerations which would arise in lock, dam, and heavy embankment constructions on the Nicaragua route, from the fact that the locality may be seriously disturbed by earthquakes. Reference to the Century Atlas indicates that within a distance of 200 miles, north and south of Lake Nicaragua, there are fourteen volcanoes which have been in active operation during the last hundred years; that several of these now form islands in Lake Nicaragua; and that the Pacific terminus of the canal is among a host of extinct craters. This is a fact that may well cause great apprehen-

sion as to the ultimate safety of the proposed canal constructions at Nicaragua. The Panama route shows no such evidences of past volcanic action.

In comparing the merits of the two routes it should not be forgotten that the Nicaragua route is practically 150 miles long, while the Panama route is less than 50 miles long. The increased risks of passing large steamers through a route three times longer than another will not fail to receive consideration.

The Nicaragua route would probably cost \$150,000,000, if built upon plans which would be adopted at this time; and from the recent statements of the American Commission, recently made before the Senate Committee, it is fair to infer that the Panama Canal can be built as cheaply as the Nicaragua Canal; in fact, some of the members of the Commission intimate that it might be built for less. The present International Commission of Engineers for the Panama Canal submits three estimates, based on different elevations of the summit level, which vary between \$94,000,000 and \$102,000,000. The first of these plans places the elevation of the bottom of the cut through the summit level at 97 feet above sea-level, with an estimated cost of \$94,000,000; the second plan places this cut at 68 feet, with a cost of \$98,000,000; while the third plan reduces the elevation of the bottom of the summit level to 33 feet above sea-level, with an estimated cost of \$102,000,000. This extreme difference of about \$8,000,000 between the cost of the several plans is probably less than one-half the allowance for contingencies in any of the estimates. Even if 50 per cent. is added to these estimates they will not then materially exceed the estimates of the Nicaragua route.

The regulation of the Chagras River and its floods is the great problem of the Panama route; and it is a matter of surprise that the engineers employed upon the De Lesseps project should have so dangerously underestimated this part of the problem. The conclusions of the present International Commission indicate that the flood volume of the Chagras River, during forty-eight hours of its maximum discharge, is about 92,000 cubic feet per second; or approximately one-half the average discharge over Niagara Falls. The estimate of the De Lesseps engineers placed this maximum at about one-fourth of the true amount. The conclusions of the present Commission are based upon rainfall observations of fifty years.

The statement is made that there has been an observed range of 70 feet in the narrow gorges of the river. The flood of 1870 is referred to as the maximum observed, and I understand that the discharge of 92,000 cubic feet per second refers to that flood.

Under the plans proposed by the International Commission the regulation of the Chagras River is to be accomplished by impounding the flood discharge behind two great dams, by which it is proposed to temporarily hold 8,830,000,000 cubic feet of flood-water. The first reservoir, or that behind the Bohio dam, would have a storage area of about 21 square miles, capable of holding 5,300,000,000 cubic feet; the second reservoir, or that behind the Alhajula dam, would have a storage area of about 10 miles, capable of holding about 3,530,000,000 cubic feet of flood volume. In the plans of the International Commission the Bohio basin would be used as the second level of the canal, while the third level, or the summit, would be supplied from the Alhajula basin. This latter basin would be somewhat removed from the line of the summit level, and its waters brought thereto by a conduit. A masonry dam is proposed for the Alhajula reservoir, and an earth and rock dam for the Bohio basin.

The part of the undertaking which would require the longest time is the excavation of the Culebra cut. The concession which has been made to the Panama Company covers a period extending to 1910, and whatever is done must be accomplished in the remaining ten years. Therefore the question assumes this form: What is the maximum amount of work which can be accomplished on the Culebra cut in ten years? The summit of the Culebra Cut is 361 feet above the sealevel; and under the plan recommended by the International Commission, which places the bottom of the summit level at 68 feet above the sea, the depth of the Culebra Cut, at the highest point of the divide, would be nearly 300 feet. This elevation would require the removal of 14,600,000 cubic yards from the cut, and in the judgment of the International Commission the removal of this volume of material would require about ten years.

The character of the material forming this great cut will be of interest to the Club. The report of the International Commission states that this excavation "represents almost entirely an excavation in hard or rocky ground." Colonel O. H. Ernst, a member of our present Canal Commission, stated before the recent Senate Committee

that the material of this cut "seemed to be an indurated clay. It is a material that is quite hard, but it weathers badly, and I should not venture to cut it to a steeper slope than 1 on 1, say 45°. I would not call it rock in any sense." Colonel Ernst derived his conclusions from an examination of the test pits which had been sunk to the proposed bottom of the excavation, or to points about 68 feet above sealevel. I should assume that the material consists of very dry laminated and indurated clay, such as we are familiar with. The depth of excavation which was carried through the Culebra cut by the De Lesseps Company is only about 66 feet, involving the removal of about 4,000,000 cubic yards of material, and it was in this part of the work that the heavy landslides occurred.

In the execution of this deep cut the International Commission propose to arrange it in a series of berms 16 feet wide for each 33 feet of vertical height, connected by slopes of 2:5, except through the clayey material near the top, where the slopes would be 3:2. These berms will guard the canal prism against dangerous slides, and also provide steps upon which can be located the steam-shovels to excavate the material, and the railroad tracks upon which the excavation will be removed to distant points.

Under the plans of the International Commission the entire prism excavation of the canal would require the removal of 38,000,000 cubic yards of earth and 28,000,000 cubic yards of rock, or an aggregate of 66,000,000 cubic yards of material. The estimate for the excavation of this material is placed by the French Commission at from 58 to 68 cents per cubic meter for ordinary excavation, and \$1.06 per cubic meter for rocky material, including the disposal of the same.

This is the total estimate of earth and rock to be removed. In the present estimates of the International Commission no allowance is made for work done under the De Lesseps project, such work being simply allowed as replacing possible underestimates of work yet to be done. It has been reported that about two-fifths of the work has been done, but this statement is not justified by any official report.

Whatever advantages the Panama route may have, from an engineer's point of view, there is a serious disadvantage which underlies the whole question. While the Panama canal might be built, as an abstract fact, for from \$100,000,000 to \$125,000,000, it should not be forgotten that the present French company owns the concession,

the right of way, the Panama railroad, and much else that would require purchase from the present owners before the construction of the canal could be entered upon. It can only be guessed what the French company would sell out for. Some have placed the amount at about \$100,000,000. They claim to have expended about twice that amount, but the evidence is not to be seen on the ground.

If \$100,000,000 must be paid the French company for what they have, and another \$100,000,000 expended in the construction of the canal, we have an aggregate cost of \$200,000,000 at least. The question of what it would cost other parties to secure the right to construct the canal will seriously embarrass outsiders from entering upon the enterprise.

Some reference to the dimensions of the canal, and of the locks and gates proposed by the International Commission, may be of interest. The locks are to be twin locks, 738 feet long and 82 feet wide. The lock-gates will be single doors, with a total height of from 60 to 75 feet. The canal prism is to have a bottom width of 164 feet in earth, and 170 feet in rock, throughout the Bohio level. In the summit level and through the Culebra cut the bottom width will be 118 feet. Through the sea-level the bottom width will be 98 feet in earth, and 111 feet in rock. These widths can subsequently be easily increased by dredging. Suitable turnouts are provided along the canal.

Outside of all questions as to the cost of an Isthmian canal, the great advantages of a sea-level canal, or one without locks except at the sea entrances, can not fail to impress itself upon our minds. Consider the danger and physical difficulties surrounding the safe lifting on one side, and the lowering on the other side, through a vertical height of 100 feet, of a modern ocean steamer weighing 20,000 tons and valued, with its cargo, at many million dollars. Consider the danger to lock-gates from the M V2 of such a steamer, almost at rest, if you please, and what would result from the wreckage of such a steamer in the canal prism or in its locks. Truly, there is much in such possibilities to justify vastly greater initial expenditures for a sea-level canal; and personally I believe that they will have weight in leading to conclusions against a great isthmian canal with locks; and that an expenditure of even \$300,000,000 for a sea-level canal would be wiser than half that amount applied to such canals as have been under consideration.

## HIGH SPEED TOOTHED GEARING.

#### JAMES CHRISTIE.

Read December 5, 1900.

For the transmission of power it frequently becomes necessary to use toothed gearing, subjected to high peripheral speed, conjointly with high pressure per unit of tooth contact, and the object of these remarks is to record what has been successfully done in recent years, as much higher speeds are now successfully attained than formerly. Considered in a static sense, the gear tooth satisfies the condition of stress if it is proportioned to endure forces acting transversely on it, and the pressure per unit of contact is not of such intensity as permanently to deform the curved bearing surface of the teeth. in motion, the curved surfaces slide upon each other as they enter and leave contact, and when this sliding action is accompanied with high pressure, the limit of endurance is soon reached, and in the case of inferior materials, this occurs at comparatively low speeds and pressures. In addition to this, more or less impact usually occurs, especially when the resistance is of a fluctuating character or the loads are suddenly applied. The effects of this hammering action are discernible by a flattening of the curved faces of the teeth, after which the proper engagement of the teeth ceases and the gear is speedily destroyed.

To prevent this, it is desirable to cut the teeth so accurately that no side clearance or "back lash" exists, and this is now usually done on first-class gearing of even the largest dimensions. Owing to the low elastic limit of cast-iron and the bronzes, we can not expect these metals to endure so high a pressure as steel, and steel appears to be the most trustworthy material to endure the highest pressures and speeds. This assertion, however, does not apply to all grades of steel. Soft steel surfaces abrade or cut very readily despite all methods of lubrication, and surfaces of this material should never be allowed to engage in sliding contact. Gearing of soft steel is usually destroyed by abrasion at quite moderate speeds. Rolling-mill pinions of steel, containing 0.3 per cent. carbon, have been destroyed in a few months, whereas the same pattern in steel of 0.6 per cent. carbon has done similar work for several years without distress. Of course, it is

necessary to shape the teeth to a proper curve to insure proper engagement and uniform angular velocity.

Some years ago there was required suitable gearing to connect the engines to a rolling-mill in this vicinity. The diameters of the wheels were 37.6" and 56.4" respectively. They were intended to revolve at speeds of 150 and 100 R. P. M. and expected to transmit about 2500 H. P. The character of the service was such that renewal was a serious matter and long endurance very desirable. A high grade of steel was selected, especially in the pinion, in which the greatest wear would occur, and which, owing to the location, was the most difficult to replace. The pinion was forged from fluid compressed steel of the following composition:

Carbon,	•	•				•			•		•	•	•	•	•	. 0.86 p	er cent.
Manganese,			•			•		•	•	•		•	•	•		. 0.51	6.6
Silicon,	•	•		•	•	•			•	•					•	. 0.27	44
Phosphorus :	an	d s	sul	pl	ıuı	r. 1	bo	th	b	elo	w	•			•	. 0.03	4.6

### The spur wheel was an annealed steel casting:

The tooth dimensions were: Pitch, 4.92"; face, 24". (See Fig. 1.) These were accurately cut with involute curves generated by a rolling tangent of 16 degrees obliquity. No side clearance was allowed. After starting the mill, it was found that a higher speed was practicable than was originally contemplated. Higher pressures on the teeth were also applied, so that ultimately about 3300 H.P. was transmitted through the gearing, corresponding to a pressure of nearly 2100 pounds per inch of face. The speed was variable, but occasionally attained a velocity of 260 R.P.M. for the pinion, corresponding to a peripheral velocity of 2500 feet per minute. This gearing has been in constant operation for several years and behaves satisfactorily.

The highest recorded speed for gearing that I can recall is that described by Mr. Geyelin in the Club "Proceedings" of June, 1894. The mortise bevels had a peripheral velocity of 3900 feet per minute, but the pressure per inch of face was only about 680 pounds, the diameter and speed being made high to reduce the pressure on the



teeth. I understand that the lifetime of these bevels is not long. If made of a grade of steel, as previously described, their diameter and speed could be considerably reduced, and prolonged endurance would be realized.

About the same time No. 1 was installed a similar application was made to another mill, the gear having a different speed ratio, and the angular velocity being lower (see Fig. 2):

						Pinion.	Wheel.
Carbon,	•	•	•	•	•	. 0.90 per cent.	0.60 per cent.
Manganese,		•	•			. 0.64	0.64

A much larger set had been previously employed, transmitting about 2400 H.P. at 750 feet per minute peripheral speed, involving a pressure per inch of face of 3500 pounds. This latter pair were 4 feet and 8 feet respectively,  $7\frac{1}{2}$ " pitch, 30" face, cut with involute teeth of 14 degrees obliquity. (See Fig. 3.)

												Pinion.	W heel.
Carbon,	•	•			•	•		•	•	•	•	. 0.52	0.42
Manganese,			•								•	. 0.55	0.73
Silicon,	•							•	•	•	•	. 0.107	0.279
Phosphorus,	•	•	•					•		•	•	. 0.022	0.078
Sulphur, .	•	•		•	•	•	•	•	•		•	. 0.02	0.05

These gears have all rendered excellent service, and to-day are apparently as good as at the beginning.

As considerable expense is involved in cutting large gears of hard steel, it is sometimes practicable to rough-cut the gear after it is made as soft as possible by slow cooling, a higher degree of hardening being imparted before final finishing by air hardening or rapid cooling from the refining heat. This is not infrequently done in the case of serews and gears of moderate dimensions. In this event it is desirable to have the ratio of manganese low, say not over 0.5 per cent. or 0.6 per cent.; as a high manganese content seems to impart a permanent hardness that is not readily reduced by slow cooling.

The subject of standard forms of teeth has recently become a matter of considerable interest, especially since the introduction of the electric motor, which has created a demand for accurate speed gear. Cycloidal curves so extensively used in the past seem to be less used in recent years than involute, for well-known reasons. The essential conditions required are that the osculating curves of the teeth must be normal to

the point of tangency of the wheels throughout the arc of tooth engagement. Accepting the involute curve as a standard, it is desirable to adopt a uniform angle of obliquity for the generating tangent. The adoption of an angle of 15 degrees by a prominent manufacturer of cut gearing and cutters has led to an extended acceptance of this standard. It is claimed that this is not advisable, but as Mr. Lewis is to discuss this feature of the subject, I will not enlarge upon it further than to observe that Mr. Hawkins, who was one of the early investigators of the merits of the involute form of tooth in the middle of the century, recommended an obliquity of 20 degrees, and asserted that no practical inconvenience would be found from the resultant lateral thrust on the shaft journals.

When all other conditions are satisfactory, the flatter the curve of the tooth, the better, inasmuch as with a curve of long radius a higher pressure can be sustained than otherwise. With the ordinary straight tooth gear it is necessary to make the tooth of sufficient length, so that normal action never ceases between successive teeth. The wearing abrasion occurs when the teeth are entering and leaving normal contact. For this reason, for very high speeds some form of the stepped or spiral tooth would appear to be favorable, using a short tooth and a minute arc of engagement on the line of centers for each section of the tooth.

It appears to be practicable to maintain sliding surfaces of steel if one of the surfaces is hard, even if the other is comparatively soft, but for steel gearing for ordinary purposes I would suggest the use of steel not less than 0.4 carbon. If the speeds and pressures are unusually high, a much harder grade of steel becomes necessary. When a small pinion engages with a large wheel, the former alone can be made of high-grade steel approaching to a carbon content of 1 per cent. When extreme speeds and pressures become necessary, the best results will be found by using in both wheels steel having a carbon content approaching 1 per cent., or an equal hardness, obtained by lower carbon and high manganese or other desirable hardening addi-With gearing accurately cut from steel of this character and securely mounted, it is believed that reasonable endurance will be obtained when the product of speed and pressure, divided by pitch, each within certain limits, does not exceed 1,000,000: for example, a speed of 3000 feet per minute and 1600 pounds pressure per inch of face, or vice versa; for gear of 5-inch pitch, assuming, so far as we know, a maximum speed of 5000 feet per minute for gear of any pitch, and permissible pressure to be proportional to the pitch.

This statement that speeds and pressures are reciprocal, or as one is increased the other must be reduced, in a fixed ratio, may not strictly be a rational one, but in a broad and general sense it is correct within the usual limits of practice.

It will be understood that such a generalization as herein stated would apply to pinions having a liberal and not the minimum number of teeth.

## INTERCHANGEABLE GEARING.

### WILFRED LEWIS.

Read December 5, 1900.

It is well understood that the teeth of gears may be varied indefinitely in shape, provided that their forms are generated by rolling something on the pitch-line of the gear-wheel. This describing outline may be a straight line, a circle, a logarithmic spiral, or anything else that will roll, but it can not be of a shape that will not roll continuously in contact on the pitch-line of the gear-wheel as far as may be necessary to form the tooth profile.

Much attention has been paid to the forms best adapted to various combinations of teeth, with a view to engaging as many teeth as possible in action, and increasing the arc of recess over that of approach for the sake of efficiency and smoothness in running. When such gears are made in pairs, to run only with each other, no reason may at first appear why the forms of their teeth should not be determined by these considerations alone, but sooner or later the patterns or cutters made especially for a certain combination of gears will surely be wanted for other conditions to which they do not particularly apply, and then it will be regretted that the teeth were not shaped for a larger range of usefulness. To be sure this would involve a partial sacrifice of the advantages originally sought, but when one pattern or cutter can be made to serve almost as well as two or three, it does not pay to be too critical and particular about the fine points mentioned, the importance of which I believe has been largely overestimated. Of course, it is better that the arc of recess should be longer than that of approach, to reduce friction and drive as nearly as possible at right angles to the line of centers, and it is also desirable, for the sake of smoothness in running, to have a long arc of action, to which the arc of approach contributes as well as the arc of recess, but a gear-wheel for general use may drive or be driven, and its arcs of approach and recess should, therefore, not be very differ-It is also admitted that obliquity of action has something to do with the efficiency of gearing, but the question arises, how much is efficiency affected thereby? For a long time involute teeth were avoided by some builders because of the thrust along the line of centers, which the early text-books pointed out as causing so much additional and unnecessary journal friction, and instead of involute forms a cycloidal system was quite generally adopted, in which the describing circle had a diameter one-half that of a twelve-toothed pinion. In this system the obliquity of action varies along the path of contact from zero at the pitch-point to about 23° at the end of a rack tooth, or 20° at the end of a pinion tooth, making the general average of obliquity about 11°.

Along with this system arose the 15° involute system, for which Prof. Willis designed his odontograph, and a 14½° system, for which the excuse has been made that the angle is easily laid off because its sine is practically ½. But there is no advantage in this over 15°, which may be quite as easily and more accurately originated, and probably the only advantage to be claimed is on the ground of thrust against the wheel centers.

It is readily seen that this thrust on centers is proportional to the tangent of the obliquity, which for 11° is 0.194; for 14½°, 0.259; and for 15°, 0.268; but these figures by no means represent the increase in pressure on journals due to the obliquity, because combined with the thrust there is always a normal driving pressure far greater in amount; and, it may be asked, what are journals for if not to take pressure in any direction? Obviously, the pressure on journals for different degrees of obliquity is measured by the secant of the angle, and not by its tangent, and the three systems should, therefore, be compared as follows:

```
11° cycloidal, secant 11° = 1.0187

14½° involute, secant 14½° = 1.0329

15° involute, secant 15° = 1.0353.
```

The differences in journal pressure for these systems are therefore very slight, and their differences in efficiency are still less, because, as demonstrated by George B. Grant some years ago, the obliquity of action in involute gearing has no effect whatever upon the friction-loss in the teeth themselves. The sliding diminishes at the same rate as the pressure increases, and the loss in effect, whatever it may be, is wholly due to journal friction.

The practical consideration of cost demands the formation of gearteeth upon some interchangeable system.

The cycloidal system can not compete with the involute, because its cutters are formed with greater difficulty and less accuracy, and a further expense is entailed by the necessity for more accurate center distances. Cycloidal teeth must not only be accurately spaced and shaped, but their wheel centers must be fixed with equal care to obtain satisfactory results. Cut gears are not only more expensive in this system, but also, when patterns are made for castings, the double curved faces require far more time and care in chiseling. An involute tooth can be shaped with a straight-edged tool, such as a chisel or a plane, while the flanks of cycloidal teeth require special tools, approximating in curvature the outline desired. It is, therefore, hardly necessary to argue any further against the use of cycloidal gear-teeth, which have been declining in popularity for many years, and the question now to be considered is the angle of obliquity most desirable for interchangeable involute teeth.

The importance of this question was impressed upon me about fourteen years ago, at which time Wm. Sellers & Co. contemplated a change from the cycloidal system above described to an involute of which the obliquity was to be determined. A careful investigation of the subject in all its aspects then led me to the conclusion that to be entirely satisfactory between the limits of a twelve-toothed pinion and a rack an obliquity of  $22\frac{1}{2}^{\circ}$  was required, but in view of the fact that twelve-toothed pinions would more frequently engage other gears than racks, an obliquity of 20° was finally adopted. This increase of 5° over common practice then seemed so radical a departure from all previous experience that it was undertaken with some hesitation and the apprehension of a return later on to a more conservative amount, but the only regret has been that the larger angle was not adopted, without regard to any preconceived notions. By common consent the addendum distance on all gear-teeth is between 0.3 and  $\frac{1}{3}$  of the pitch, 0.3 pitch being used for circumferential pitches, and  $\frac{1}{n}$  (n being the number per inch) for diametral pitches. The firm of Wm. Sellers & Co. uses the former in both cases, but the general tendency seems to be the other way, on account of its convenience.  $\frac{1}{n}$  is equivalent to  $\frac{p}{2}$  or 0.3283 p, and the difference is, therefore, slight. Occasionally there is some discussion about the merits of long and short

teeth, shorter teeth being advocated for their greater strength, and in certain combinations it is quite possible to use them, but in an interchangeable system the addendum must be long enough to insure an arc of action that will safely cover the pitch in all cases. It is, therefore, not thought desirable to suggest a change in this well-established particular.

The difficulty encountered in the use of involute gearing of common obliquity—14½° or 15°—is known as interference. This is most apparent between racks and pinions, and is due to the path described by the point of the rack tooth crossing the involute face of the pinion near the base-line. A very important part of the acting face of the pinion must then be cut away to clear the rack at the loss of a large part of the arc of action, or the end of the rack tooth must be rounded, thus destroying its claim to the advantages of the involute system and giving it a mongrel character. To avoid this defect, which occurs in the common systems to all pinions of less than thirty teeth, it is necessary to increase the obliquity,

letting a = addendum in terms of the pitch.

a =obliquity.

n = smallest number of teeth to engage with a rack without interference.

Then it can be shown that  $\sin^2 a = \frac{2\pi a}{n}(1)$ ; and assuming a = 0.3 and n = 12, we have  $\sin^2 a = \frac{\pi}{20} = 0.15708$ , whence  $a = 23^{\circ} 19'$ .

Making  $a = 20^{\circ}$  and a = 0.3, as in the Sellers' system, we have n = 16, and it has been found by experience that the interference is noticeable between twelve-toothed pinions and such gears as they frequently engage, of from thirty to sixty teeth.

Letting a=0.3283 in equation (1), we have  $\sin^2\alpha=\frac{2}{n}$ , from which n=30. The angle  $22\frac{1}{2}$ ° is suggested as a convenient one to adopt, being a quarter of the quadrant, and for this it is believed the interference between a twelve-toothed pinion and a rack will be practically imperceptible. For  $a=\frac{p}{\pi}$  we shall then have  $n=\frac{2}{\sin^22\frac{1}{2}}=13.35$ ; and for a=0.3, n=12.87.

The pressure on journals will be increased to secant  $22\frac{1}{2}^{\circ} = 1.0824$ , which is only about 5 per cent. more than usual.

The arc of action will always cover the pitch by a margin of 0.3 to 0.6 thereof, and it will vary but little in extreme cases.

The wear on the teeth of pinions will be less concentrated at the

base-line, and by avoiding interference, their arc of action is actually increased. It may be urged that the whole load is necessarily concentrated on a single tooth, and without denying this, I maintain that such is generally the case in any system of gearing, however long the arc of action may appear on paper. A division of the load on several teeth implies absolute perfection in forming and spacing the teeth, a condition never attained in practice, and it is therefore never safe to assume that the load is carried by more than one tooth under any Frequently the service required of gearing necescircumstances. sitates a change in pitch due to wear at some part of the circumference more than at others. For example, in a punching machine the load is concentrated on a few teeth, which do the work while the others have comparatively nothing to do, and as the working teeth wear away there is necessarily a change of pitch between them and the others not so worn, while the pinion probably wears all over and retains a uniform pitch.

By the adoption of 22½° obliquity a considerable increase in the strength of teeth will be effected in addition to the advantages already mentioned, and if it is within the province of The Engineer's Club of Philadelphia to advocate much-needed reforms in engineering practice, I would suggest "Uniformity in Interchangeable Gearing" as a subject worthy of its attention. By the action of the Franklin Institute more than thirty years ago a standard system of screw-threads was inaugurated, and if by the interchange of opinions an agreement among engineers can be reached as to what system of gearing is best for general adoption, the needless diversity which now exists may gradually disappear.

The object of this paper is not to direct an expression of opinion in concurrence with the views here expressed, so much as to bring out well-considered discussion leading to the formation of sound opinions.

I realize that a good deal may be said against the introduction of a new system of gearing differing from those already in use, and that it may be impracticable in many cases to make any change, however desirable, but with the great improvements that have recently been made in the methods of gear cutting a change of system is not so serious a matter as it was a few years ago.

Uniformity in interchangeable gearing by all builders of machinery is certainly to be desired, and to this end it should be possible for en-

gineers to agree upon the system most worthy of adoption, leaving the question of expediency to take care of itself.

### DISCUSSION.

E. GRAVES.—Mr. Christie made reference to some gear wheels concerning which I wish to give some further particulars. These consist of three sets of cast-steel bevel-wheels, all duplicates. The pinions are the drivers, and are 57.39" pitch-line diameter, have 36 teeth, 5" pitch and 20" face. The wheels are 74.8" diameter, have 47 teeth of same face. The teeth are carefully cut to involute layout, and are 3.43" high,—1.59" above pitch-line, 1.84" below pitch-line,—and 2½%" thick on pitch-line. The normal speed of pinion is 260 R. P. M., giving 200 revolutions to the wheel, and nearly 4000 feet circumferential speed on pitch-line. The transmission is 1300 H. P. Assuming that the entire load should come on the outer end of one tooth, and was equally distributed along its length, the result would be 2100 pounds per square inch fiber strain at the root of the tooth.

The pinion is mounted on the upper end of a vertical shaft 148 feet long. This shaft is 10" diameter, and the sections are joined together with solid forged-on flange couplings. At the lower end is the runner of a turbine drivingwheel having upward discharge. The upper section of shaft is provided with a thrust bearing. When the turbine gate is only partially opened, the weight of the shaft results in a downward pressure in this bearing; with full gate opening, the weight of the shaft is more than overcome and the result is an upward pressure in thrust bearing. This thrust bearing is of rings turned out of an enlarged forging in much the same manner as steamship-shaft thrust bearings. thrust collars are divided so that one portion resists the longitudinal motion to the shaft in one direction, and the remaining portion in the opposite direction; these two sets are adjustable in reference to each other, so that the longitudinal motion to shaft does not exceed about  $\frac{1}{32}$ . The whole bearing is inclosed in a tight case, and is lubricated by forced pressure of oil fed through center of shaft, with exit openings at each thrust ring. The longitudinal motion to horizontal shafts is limited by the back bearing of wheel center. Both shafts extend through the gears and are supported in a massive bridge casting, with bearings Gears are inclosed in a casing and are lubricated by oil fed under pressure through several small jets applied just in front of teeth as they mesh together.

These gears have been in service for five years; their behavior, however, has not been wholly up to expectations. Their wearing power, in the sense of resisting abrasion, is satisfactory, but at different times teeth have been broken out. This breaking has been confined entirely to the pinion, and the nature of the break is the same in all cases, evidently beginning at the large end, cracking around the root, and following along the tooth. In some cases the break has followed more than half the length of the tooth and the piece has been thrown out; in most cases the existence of the crack in its early stages has been detected

by the sound of the gear in action. The quality of the steel in castings is the ordinary commercial article. The widest variation in analysis observed is, in one instance:

Silicon,	•	•	•	•	•	•	•	•	•		•	•	•	•	•	. 0.25
Sulphur, .	•		•	•	•	•	•	•		•	•	•	•	•	•	. 0.036
Phosphorus,	•	•	•	•	•	•	•	•	•	•	•	•	•		•	. 0.071
Manganese,	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	. 0.74
Carbon,	•	•	•	•	•	•	•	•	•		•	•	•	•	•	. 0.31
Another:																
Silicon,	•		•	•	•	•	•			•		•		•	•	. 0.27
Sulphur, .																
Phosphorus,	•	•	•		•		•		•	•	•		•		•	. 0.032
Manganese,		•	•		•	•	•	•	•	•	•	•		•	•	. 0.80
Carbon,		•		•	•	•		•	•		•	•	•	•	•	. 0.23

As is to be expected, the softer metal has resisted breaking the longer. In two sets of these gears the resisting work is of a varying nature with sudden and wide fluctuations; in the third instance the working is more constant. This variation of conditions does not seem to have influenced failure, as the teeth have broken in all the sets.

One of the practical difficulties in operating bevel gears of the nature described is the difficulty of holding them so that they will be in proper contact; longitudinal motion in either shaft throws them out of pitch. The most serious problem, however, is in securing and maintaining shafts so that the extended axis-lines of same pass through a common point. The effect of power transmission from pinion to gear is to put these axis-lines out of position, moving them in opposite directions and resulting in end contact of teeth and concentrated load instead of evenly distributing the load along the whole length of tooth. In this particular the question of maintaining bevel gears is decidedly more of a problem than that of spur gears. In this latter case small end motions of carrying shafts produce no effect, while the wearing of bearings is only the shifting of pitch-line, and, as it occurs slowly, it will, within reasonable limits, adjust itself.

As a matter of further interest, I will mention that in this same room with these gears are three other sets of bevel gear having cut-steel pinions and mortise wheel with cast-iron rims. The diameters and ratios of these—speeds, mountings, and service—are practically the same as those described, but the transmission of power is 1100 instead of 1300 H. P. The pinions have 33 teeth, 5½ "pitch, with 20" face, the teeth being planed down to 2½ "thickness on pitch-line. The wheels have 43 teeth. These gears have been in service some seven years. None of the pinions has ever given way; the wooden teeth in the wheels, however, last only from six weeks to two months, an extra rim being kept on hand for refilling and replacing.

L. F. RONDINELLA.—I wish to say a word on the history of the use of cycloidal and involute curves in gear teeth, which has been alluded to by Mr.

The cycloidal curves were advocated by Willis and by Reuleaux (the English and the German authorities on mechanics), who both recommended an angle of obliquity at the pitch-line of fifteen degrees, Willis explaining that he adopted this angle because he found "by various trials" that it gave "the best form to the teeth."\* On account of the difficulty of drawing the accurate curves, these two authors also gave methods of construction to represent them approximately by circular arcs, and while Willis' method was for a straight-flank pinion of twelve teeth, and Reuleaux's † for one of eleven teeth, they produce identical results when the same constants are used. I have combined and simplified these two methods into one, which I have used for many years with my students in drafting at the Central Manual Training School. With regard to the involute curve in the teeth of wheels, it was Willis who proposed the angle of 14½ degrees as "a very convenient value," because its sine "equals one-quarter very nearly." His method of construction for finding a circular arc that approximates to the involute I have simplified also by using thirty-one thirtyseconds (which is as nearly correct) for the cosine of this angle of obliquity. My methods of construction, together with tables from which the resultant values can be got directly, may be found in "Notes on the Design of Gear Wheels," published in the "Journal of the Franklin Institute," April, 1894. By drawings carefully made at that time I compared circular arcs got by these methods with the true cycloidal curves through the same pitch points, and found that the approximate cycloid was almost perfect for the teeth of a rack, while for the teeth of a wheel the approximate epicycloid made the points a trifle narrow and the approximate hypocycloid made the flanks a trifle thick. It is only recently, however, that I have tested Willis' method for the approximate involute for the teeth of wheels, and I find that it makes the points of the teeth much too narrow; and that a radius equal to three-eighths (instead of one-fourth) of the pitch radius is needed to produce a circular arc that approximates very closely to the true involute with this obliquity. It is, perhaps, fortunate that this error existed in Willis' method, for it has probably prevented the disastrous results of interference in many cases when employed where this angle of obliquity has been used (as it should not be) for a wheel with less than thirty teeth. The advantages of using a larger angle of obliquity for involute teeth have only recently been appreciated.

MR. Lewis.—In regard to approximate methods, I would say that for many years the firm of William Sellers & Co. generated cutters by means of two circular arcs, but finally came to the conclusion that no approximate method whatever is satisfactory for gears which had to run at any speed. It is not sufficiently accurate, and the error in form can not be detected on paper because no drawing can be made close enough. The curve must be mechanically generated to form gears that will run at the speeds required by modern practice.

<sup>\* &</sup>quot;Principles of Mechanism," Second Edition, p. 134.

<sup>†&</sup>quot; Kinematics of Machinery," pp. 161 and 163.

<sup>‡&</sup>quot; Principles of Mechanism," Second Edition, p. 133.

It might be well enough to lay out castings for slow-running gears by circular arcs, but as soon as any speed is developed, the departure from the true shape is at once noticed, and the greater the speed, the more deafening the noise. The machine, therefore, which was originally designed to approximate the shape by circular arcs was converted into a machine which actually described the shapes—the cycloidal and the hypocycloidal curves. But that was finally displaced by another generating machine for involute teeth, the advantages of the involute system having become very apparent.

In regard to the pressures carried by gear teeth, Mr. Christie seems to lay down a rule making the product of speed and pressure constant. This would reduce the load in proportion to the speed, and it seems to me an open question whether that should be adhered to or not. I do not think it has been demonstrated how the pressure of the teeth should vary with the speed. Some experiments, I think, should be made which would indicate that more clearly than has heretofore been done. It is interesting to note his remarks regarding the influence of the hardness of the metal upon the pressures carried, and instead of reckoning the pressure by the inch as so much per inch of face, it seems to me the pitch should also be included, because the face of a gear tooth is very much like a roller, and the pressure carried by a roller varies with its diameter as well as with the face. Some authorities seem to think that it should vary with the square root of the diameter; others directly with the diameter, and I am inclined to the latter opinion. If gear teeth are proportioned for strength, they are also proportioned for wearing pressure and surface to carry the load.

MR. J. CHRISTIE.—The bevel gears described by Mr. Graves are very interesting and useful as a record. It is much more difficult to obtain satisfactory results with bevels than with plain spurs, as any deviation from correct alinement is fatal to correct tooth action in the former. In this instance, while speed is very high, the pressure on the teeth is comparatively low—about 750 pounds mean pressure per inch of face. Thus the products of speed and pressure in relation to the pitch are considerably below the quantity assumed as a safe maximum.

Regarding the quality of the material, the manganese is too high. While steel of this composition would be moderately hard and wear fairly well, it would be somewhat brittle. It is not surprising to learn that some teeth gave way by fracture. If the relative proportions of carbon and manganese in the steel were reversed, it would be a much better material for the purpose.

I hope Mr. Lewis' thoughtful paper may aid in establishing the desired results: an accepted standard for the shape of teeth. Probably at no time was the confusion more accentuated than at present, owing to the diverse methods of gear cutting practised by different establishments, and the difficulty experienced when an interchange, which frequently occurs, is desired.

Mr. Rondinella.—Of course, the great value of circular arcs approximating closely to the true tooth-curves is for the use of the draftsman, and in a less degree, nowadays, for the use of the pattern-maker afterward. But a draftsman can use a circular arc just as well to represent these curves as he can use a straight line to represent the helix of a screw-thread.

W. Trinks.—I wish to call attention to an article on high speed gearing in the November and December numbers of the "Zeitschrift des Vereins deutscher Ingenieure," 1899, by the chief engineer of the General Electric Company, at Berlin, Germany. The experiments show that there is no rule for the relation between pressure and speed; it depends upon accuracy: the load on the teeth may be the higher the more accurately the gears are made. A remarkable method of manufacturing gears was the outcome of the experiment. The curves are laid out on paper three or four times the size of the real tooth, reduced to proper size by photography, transferred on sheet steel, and etched in. Thus the highest degree of accuracy is obtained.

It was found that neither cycloidal nor involute curves gave the best results. Another curve was developed with a view to reducing the sliding motion between the teeth. The article contains very interesting diagrams on this point. By dividing the length of two working teeth into an equal number of parts, the amount of sliding action can be determined and the fact shown that it is reduced to a minimum by these methods.

Another thing shown by the paper is never to place a fly-wheel close to a gear. If possible, have a good length of shaft between. Slight inaccuracies in the pitch of the wheel require acceleration or retardation of the mass, and in order to do this force is needed. This force causes a hammering on the teeth which may break them; in other words, plenty of elastic material should be between the inertia masses and the gears. I feel pretty sure that all engineers will be much interested in the article; it is a valuable treatise on high speed gearing.

# A HISTORICAL SKETCH OF THE ENGINEERS' CLUB OF PHILADELPHIA.

### EDGAR MARBURG.

Read at the Celebration of the Twenty-third Anniversary of the Founding of the Club, December 15, 1900.

### LADIES AND GENTLEMEN:

The function this evening is designed to commemorate the day, twenty-three years ago, that witnessed the founding of The Engineers' Club of Philadelphia. The observance of this day, henceforth to be known as Anniversary Day, is expected to become a pleasant annual feature in the future life of the Club. It seemed fitting that at this, its initial celebration, a brief account should be given of the Club's origin, its early history and subsequent development.

If there be one quality that marks the engineer above the average of his fellows, that quality, be it said in all modesty, is modesty itself. Logically, then, the beginning of the Club could not well have borne a different stamp. On the 17th of December, 1877, a small assemblage of serious-minded young men, twenty-one in number and little more in average age, gathered at the home of Dr. Coleman Sellers, 3301 Baring Street, for the avowed purpose of establishing closer social and professional relations between young men engaged in engineering pursuits. This meeting was itself the issue of two social gatherings of a purely informal character, held during the fall of the same year at the residences of Messrs. Charles E. Billin and Charles A. Young. The seed for the undertaking had, however, been planted the year before during the Centennial Exposi-Both the American Society of Civil Engineers and the American Institute of Mining Engineers, with commendable forethought, had established admirably appointed headquarters in this city for the convenience of American and foreign engineers visiting the exposition. The American Institute of Mining Engineers had fitted up commodious apartments at Eleventh and Girard Streets, in the same block in which our Club has its present habitation. Throughout the centennial season informal meetings, or conversaziones, as they were called, were held here on Thursday evenings, at which, in addition to the social interchange of opinions between engineers from all corners of the globe, addresses or familiar talks were held on a great variety of engineering topics. The pronounced success of these meetings, as well as the intelligent and thoughtful provision for the needs of foreigners, was due especially to the zealous efforts of one of our own charter members, Mr. William G. Neilson, upon whom a decoration was bestowed by the Emperor of Germany, in recognition of his services in that connection to German engineers.

It appears that the organization of The Engineers' Club of Philadelphia was prompted primarily by pleasant recollections of these very delightful Thursday evening meetings held during 1876. To return to the event, the anniversary of which we are now commenorating, it is recorded that the meeting was called to order by Mr. Coleman Sellers, Jr., who credited Mr. Charles E. Billin with the conception of the idea, which he bade him lay before the meeting in fuller outline. Mr. Billin's remarks on this interesting occasion are, unfortunately, not on record. That they did not fail in their purpose is attested by the fact that a permanent organization was immediately effected by the election of officers and the appointment of a committee on constitution and by-laws. With due regard to ceremonies befitting so impressive an occasion, the president-elect, Professor L. M. Haupt, was escorted to the chair on the arm of two members appointed by the temporary chairman. The other officers were Mr. Coleman Sellers, Jr., Vice-President, and Mr. Charles E. Billin, Secretary and Treasurer.

It seems to have been the sense of the meeting that the membership should be limited, in the apprehension that too great a number would check the development of that sociability which it was desired to foster. In fact, from the by-laws reported at the next meeting it appears that the active membership was originally limited to fifty.

All persons in attendance at the organization meeting, and at the two social gatherings previously held, to the number of twenty-three, were declared charter members of the Club. Of these, four have remained steadfast in their allegiance to this day.\*

<sup>\*</sup> Charles E. Billin, Wilfred Lewis, M. R. Mucklé, Jr., William G. Wilson.

It is recorded in the minutes of the first meeting that a member offered the somewhat drastic suggestion that, with a view to maintaining control of engineering positions, a system should be inaugurated for effectively suppressing young men who might contemplate entering the engineering profession. The transition from this idea to that of the modern trust is so easy that the responsibility for the latter rests plainly upon our shoulders. The means by which this suppression was to be effected were not specified. It seems, however, that the matter was not pressed against the protests of the President that the proposed scheme might prove disastrous to his own occupation in connection with engineering education.

The constitution and by-laws were submitted and discussed at the next meeting, held on January 8, 1878, and in their final amended form were adopted on January 19th of that year. The constitution provided that "this Association shall be called The Engineers' Club of Philadelphia"; that "its object shall be: the professional improvement of its members, the encouragement of social intercourse among men of practical science, and the advancement of engineering in its several branches"; that "among the means to be employed for attaining these ends shall be periodical meetings for the discussion of scientific subjects and for social intercourse"; that "the memberships shall consist of honorary, corresponding, and active members; and that civil, geological, mining, and mechanical engineers, architects, and other persons who by profession are interested in the advancement of science shall be eligible for admission to membership." A striking commentary on the marvelous, latter-day evolution of engineering is found in the omission of the now so familiar designation of "electrical engineer," in the specific enumeration of those eligible for membership.

The by-laws provided that "meetings shall be held on the first and third Saturdays of each month," a custom that obtains at the present time. The expenses were to be borne wholly by the active members, who were subjected to the modest entrance fee of \$1.00 and were liable afterward to periodic assessments as circumstances demanded.

The responsibility for the program was vested in a "Committee on Information," composed of five members, the personnel of which was continually changing by the appointment of two new members at each meeting. This Committee was instructed to "collect notes of new

engineering works and facts and figures of interest to the members of the Club." One member of each Committee was expected to collect newspaper clippings and short articles from periodicals on subjects of especial interest to engineers. It was stipulated that these articles were to be carefully pasted on margined legal cap, that a short resume of each article was to be given at the meetings, and that the sheets were to be afterward handed over to the Secretary for safe-keeping. While it is somewhat doubtful that the latter requirements were at any time literally observed, there is abundant evidence that the proceedings during this early period were of a most interesting and varied character and distinctly less formal than at the present time.

The policy of the Club was vigorous and enterprising from the start. Scarcely two months in existence, it tendered a reception at the Penn Club, Eighth and Locust Streets, to the American Institute of Mining Engineers, then assembled in this city in annual convention.

The first typographic output appeared soon afterward in the form of a "Committee Report on the Metric System of Weights and Measures." In substance, the Committee recognized the merits of the metric system; heartily recommended its use in professional literature; favored its gradual introduction in practice; but deprecated the immediate compulsory adoption by State or national legislation. It is interesting to recall that at a meeting eighteen years later, almost to a day, a discussion of the same subject resulted in the adoption of a resolution, by a vote of 100 to 60, "that The Engineers' Club of Philadelphia respectfully urges its representatives at Washington to advocate the adoption of the metric system as the only legal standard in the United States, and to promote such international cooperation as will provide unity of practice amongst commercial nations."

At the sixth meeting a special committee was appointed to report upon the telephone and the phonograph, two recent inventions that had produced a sensation throughout the civilized world, no less startling than that created by the discovery of the x-rays within the nearer past.

Before attaining to its first anniversary, the Club had memorialized Congress on behalf of the United States Board for Testing Iron, Steel, and other Materials. Another lengthy memorial had been addressed to the Legislature of Pennsylvania, embodying a strenuous plea on behalf of a geodetic survey of the State. In the discussion

of the latter measure it was stated as an instance of the shocking state of affairs then existing that recently, in retracing the line between Pennsylvania and Delaware, it was found that a Pennsylvania member of the Legislature actually lived in Delaware.

The buoyant confidence in the ultimate destiny of the Club enterained by its energetic founders is, perhaps, in nowise better shown :han in the resolution to make the Club's library a circulating one at a time when the same consisted of a single volume. It may be that this measure was prompted in part by the exigencies of the situation, since the Club itself stood at that time on what might be called a circulating footing, having no abiding place that it could call its own. For the first four months the Club led a cheerful, prosperous, though somewhat peripatetic, existence by holding its meetings at the houses of various members. The minutes of those times contain sundry appreciative references to the hospitality dispensed by "mine gracious host," in providing "a most acceptable and refreshing entertainment." It appears also, and much to the credit of these sturdy founders it should be counted, that the serious side of their venture was not allowed to suffer; for after these intervals of good cheer and fellowship, the discussion of so-called "questions for debate" was resumed with unabated vigor and unfailing regularity.

After seven such meetings, an arrangement was effected with the Philadelphia Chapter of the American Institute of Architects for the joint use of their rooms at No. 10 North Merrick Street, on the present site of Broad Street Station. At this location, on the third floor of the building, the first meeting was held on April 6, 1878. In the fall of that year the Club had its full complement of fifty active members, besides a waiting list of encouraging proportions. The new conditions were promptly met by a reorganization on broader lines; the adoption of a new constitution and by-laws; the removal of the former restrictions on the membership; and a substantial increase of dues, with a view especially to publishing the Club's "Proceedings" and thereby extending its sphere of usefulness.

At the beginning of the following year the members had the well-merited satisfaction of greeting the first number of the first volume of the "Proceedings," which led to the immediate establishment of an extensive and exceedingly valuable exchange list. The favor with which this maiden effort was received in outer technical circles may

be fairly judged by the following excerpt from an editorial in the "Engineering News" of March 15, 1879, then, as now, the leading engineering journal in this country: "We are in receipt of the first number of the 'Proceedings of the Engineers' Club of Philadelphia,' edited by Charles E. Billin, Corresponding Secretary. It is a very fine pamphlet of eighty-eight pages, and is the most creditable display of enterprise ever exhibited by any American engineering society." Within a year the first volume, consisting of five numbers, aggregating 294 pages, had been completed and had gained for the Club an enviable reputation both at home and abroad.

The membership had, meanwhile, increased to nearly one hundred; a good nucleus had been created for the library, largely through generous donations on the part of Mrs. Joseph Harrison; and entirely independent quarters had been established at No. 1518 Chestnut Street, where the first meeting was held on September 6, 1879.

The Club's success and permanency were now assured beyond peradventure. Two years later its membership had doubled, and more commodious apartments were secured at No. 1523 Chestnut Street, where the Club met for the first time on December 3, 1881. Within a few years the continued increase of membership again demanded more extended accommodations, and a house was accordingly leased at No. 1122 Girard Street for the exclusive use of the Club. The house-warming took place here on October 17, 1885, and at this location the Club has maintained an existence of uninterrupted prosperity up to the present time.

The proverbial hospitality of the "city of brotherly love" to the stranger within her gates has been well sustained by the Club in courtesies extended on numerous occasions to scientific and technical societies temporarily sojourning in our midst and to distinguished foreign visitors. Especially noteworthy are the reception in honor of Count Ferdinand de Lesseps in March, 1880, and that tendered the delegates to the World's Fair of the Engineering Society of France, in August, 1893, an event which, by their own generous declarations, contributed in no small measure to the enjoyment of their visit to this country. A booklet of over one hundred pages, with illustrative charts, relating to "Objects of Interest to Engineers and others in and about Philadelphia" was prepared by the Club partly for that occasion and to serve the needs of foreign engineers in general who might be attracted

to this country by the World's Fair. This laborious task was voluntarily assumed by one of our energetic members and ex-presidents, Mr. John C. Trautwine, Jr.

The Club's life, on its social side, has been emphasized at various times by receptions, excursions, social meetings, and dinners, with the attempt always to enhance their enjoyment by the avoidance of needless formality.

The legal incorporation of the Club on June 9, 1892, the date of its present charter, marked an important epoch in its affairs.

Within the limits of this brief review no attempt can be made to enumerate the Club's many-sided activities during the twenty-three years of its honorable history. Its published "Proceedings," containing not far from 6000 pages, in seventeen octavo volumes, tell their own story of the Club's achievements in furtherance of the interests for which it stands. Eleven hundred and twenty-five persons have at various times been counted among its members. The list at present comprises 462 names; and the attendance at the semi-monthly meetings shows the gratifying average of no less than 70.

The history of the Club abounds with examples of self-sacrificing devotion to its interests and principles on the part of individual members; of arduous labors willingly assumed, without reward save that which comes from the sense of duty well performed. The Club's policy has ever been marked by wise conservatism, though it has not hesitated to express itself, at proper times, squarely and unequivocally, on public measures touching interests within its province. With modest pride may we look upon its past and ask no better earnest for its future.

#### OBITUARY.

### EMILE C. GEYELIN.

EMILE C. GEYELIN was born November 15, 1825, in Mulhouse, France, where he received his education as a mechanical hydraulic engineer under Jonval, the distinguished inventor of the Jonval turbine. In the early forties he came to this country for the purpose of introducing this wheel and to practise his profession, and years ago became a naturalized citizen. One of the first of his works was the erection of one of these wheels for the powder-works of Messrs. E. J. Dupont & Co.

In 1851, upon the recommendation of Mr. Frederick Graff, Chief Engineer of the Philadelphia Waterworks, one of the breast-wheels at the Fairmount Pumping Station was replaced by a Geyelin-Jonval turbine. In 1862 three new turbines were started, and during 1867–1871 three others were installed, replacing the remaining breast-wheels. In his report for 1871 Mr. Graff, again Chief Engineer, says of the last of these installations: "Like those previously erected by the same parties, it is an excellent piece of work, and reflects great credit upon the contractors, Messrs. E. Geyelin and I. P. Morris & Co., for the faithful and skilful manner in which they have performed the requirements of their contracts." The seven turbines thus installed are still in operation, furnishing all the power used at that station. About fifty years ago the wheels of the Montreal Waterworks were replaced by the Geyelin turbines. They were subsequently adopted for the waterworks of Augusta, Ga., Watertown, N. Y., Willimantic, Conn., Richmond. Va., and other cities.

In 1875 Mr. Geyelin invented a duplex turbine, designed to run economically at one-third, one-half, or two-thirds gate. As a substitute for the old-fashioned wooden step used in turbines he invented a glass suspension bearing, equally applicable for other heavy upright shafting. This is in use in most of the turbines since erected by Mr. Geyelin.

For nearly thirty years preceding his death Mr. Geyelin was consulting engineer to the firm of R. D. Wood & Co., of Philadelphia, which has installed many plants for the supply of water and for the development of water-power.

One of Mr. Geyelin's most recent works was the erection of turbines for the Niagara Falls Paper Co. Here he applied the pressure of the water to the bottom instead of to the top of the turbine, furnishing a water bearing for the weight of the shaft and of the dynamo. This was accomplished by giving the bottom of the penstock a turn of a half circle and inverting the turbine itself.

Mr. Geyelin was a recognized authority in matters pertaining to water-power, and was frequently consulted as an expert. Among his writings on water-power and waterworks were: A pamphlet addressed to the American Waterworks Association on April 23, 1891, entitled "The Growth of the Philadelphia Waterworks," with remarks as to its further improvement; "A Suggestion for a Pure and Unpolluted Water-supply for Philadelphia"; and "The Baptism of the

Great Niagara Tunnel." The last-named paper was published in the Proceedings of The Engineers' Club of Philadelphia, April and June, 1894.

Mr. Geyelin married Miss Laussat, only child of Anthony Laussat, of Philadelphia, and granddaughter of Anthony Laussat, the last Prefect of Louisiana, who acted as Commissioner when that State was transferred from the French to the United States government. Mr. Geyelin is survived by his widow and by his son, Henry Laussat Geyelin, an attorney of this city.

With the courtesy of a French gentleman of the old school Mr. Geyelin combined a simplicity and modesty of demeanor which, while it endeared him to all with whom he came into personal contact, forbade him to assume that outward prominence to which his abilities and his achievements so richly entitled him.

EDWIN F. SMITH,
FRANCIS SCHUMANN,
JOHN C. TRAUTWINE, JR.,
Committee.

## ABSTRACT OF MINUTES OF THE CLUB.

REGULAR MEETING, November 17, 1900.—The President in the chair. Sixty-seven members and eight visitors present.

The death of Thomas P. Lonsdale was announced.

Dr. Joseph T. Rotbrock read a paper on "Pennsylvania Forests and What is Necessary to Restore Them." The subject was discussed by Messrs. Birkinbine, Marburg, Codman, Schermerhorn, Maignen, and Trautwine.

Business Meeting, December 1, 1900.—The President in the chair. Sixty-eight members and six visitors present.

Nominations for officers were presented as follows:

For President:	Proposed by:	Seconded by:
HENRY LEFFMANN.	{ James Christie. Carl Hering.	Jos. T. Richards. Wm. R. Webster.
For Vice-President: EDWIN F. SMITH.	John C. Trautwine, Jr.	Carl Hering.
For Secretary: L. F. RONDINELLA.	W. B. Riegner.	H. C. Felton.
For Treasurer: Geo. T. Gwilliam.	Minford Levis.	W. Devereux.
For Directors: SILAS G. COMFORT. MINFORD LEVIS. W. B. RIEGNER. HARRISON SOUDER.	Henry Leffmann. L. Y. Schermerhorn. Wm. C. L. Eglin. John Birkinbine.	Edward K. Landis. Geo. S. Webster. Josiah Dow. H. V. B. Osbourn.

The Committee on Nominations was named as follows: L. Y. Schermerhorn (Chairman), John C. Trautwine, Jr., Geo. S. Webster, John E. Codman, and Prof. Walter L. Webb.

Mr. James Christie read a paper upon "High-speed Toothed Gearing." Mr. Wilfred Lewis read a paper on "Interchangeable Gearing." The subject was discussed by Messrs. Graves, Rondinella, Christie, Hering, Eglin, and Trinks.

The Tellers reported the election of Samuel S. Sadtler and F. H. Shelton to active membership.

Anniversary Meeting, December 15, 1900, held at the New Century Drawing Room, 124 South Twelfth Street. Eighty-six members and one hundred and seventy-three visitors present.

No regular business was transacted.

The President read a sketch of the history of the Club, from its foundation to the present time.

Mr. Carl Hering delivered an illustrated lecture on "The Popular Features of the Paris Exposition."

At the close of the exercises an informal reception with refreshments and music was given.

## ABSTRACT OF MINUTES OF THE BOARD OF DIRECTORS.

SPECIAL MEETING, October 27, 1900.—No quorum.

SPECIAL MERTING, November 3, 1900.—Present: The President, the Vice-Presidents, Directors Levis and Christie, the Secretary, and the Treasurer.

The meeting was called to consider the arrangements for the celebration of the Twenty-third Anniversary.

SPECIAL MEETING, November 10, 1900.—Present: The President, the Vice-Presidents, Directors Levis, Souder, Christie, and Piez, the Secretary, and the Treasurer.

The meeting was called for consideration of the celebration of the Anniversary.

REGULAR MEETING, November 17, 1900.—Present: The President, the Vice-Presidents, Directors Levis, Souder, and Smith, the Secretary, and the Treasurer. The Treasurer's report showed:

Balance on hand, September 30, 1900,	•	•	•	•	•		•	. \$279.50
Receipts in October,	•	•		•	•	•		. 521.40
								\$800.90
Disbursements in October,	•	•	•	•	•	•	•	. 555.13
Balance, October 31, 1900,			•			•	•	. \$245.77

The death of Thomas P. Lonsdale was announced.

The resignation of Wm. Penn Evans as Director was accepted.

The House Committee made a report in regard to the cost of furnishing electric lighting for a portion of the Club-house.

A Special Committee on Club Anniversary made a preliminary report.

SPECIAL MEETING, December 1, 1900.—Present: The President, the Vice-Presidents, Directors Levis, Souder, and Christie, the Secretary, and the Treasurer. The Committee on Anniversary presented a final report.

REGULAR MEETING, December 15, 1900.—Present: The President, the Vice-Presidents, Directors Levis, Souder, and Smith, the Secretary, and the Treasurer. The Treasurer's report showed:

Balance on hand, October 31, 190	0,	•	•		•	•	•	•	•	•	<b>\$</b> 245.77
November receipts,										•	256.25
Transferred from 3% account, .			•	•	•	•	•		•	•	300.00
										-	\$802.02
November disbursements,										•	232.54
Balance, November 30, 1900,	•					•				•	\$569.48

Resignations were accepted as follows:

From Active Membership: F. J. Firth, A. Hale, G. Mordecai, F. V. Matton, Thomas Spencer, W. M. Stine, A. B. Stovell, C. A. Merriam, and F. Uhlenhaut, Jr. From Associate Membership: S. C. Dinsmore, F. C. Kohl, and B. F. Stradley.

## ADDITIONS TO GENERAL LIBRARY.

FROM J. J. L. HOUSTON, PHILADELPHIA.

Railway Economy in Europe and America, Dionysius Lardner, 1850. Civil Engineering, John Millington, 1839.

FROM ERNEST McCullough, Lewiston, Idaho.

Municipal Public Works Manual, 1900.

FROM JAMES CHRISTIE, PHILADELPHIA.

Talbot's Open-hearth Continuous Steel Process, 1900.

FROM AMERICAN PHILOSOPHICAL SOCIETY.

Proceedings, Vol. XXXIX, No. 163.

From American Soc. Mechanical Engineers.

Transactions, Vol. XXI, 1900, unbound.

FROM CHAS. H. RUST, CITY ENGINEER, TORONTO, CANADA. Annual Report, 1899.

FROM WAGNER FREE INST. OF SCIENCE.

Transactions, Vol. III, Part 5, December, 1900.

FROM J. C. SMOCK, STATE GEOLOGIST, TRENTON, N. J.

Annual Report, 1899 (Forests), with maps.

FROM NEW YORK ACADEMY OF SCIENCES.

Memoirs, Vol. II, Part 2, 1900. Annals, Vol. XIII, Part 1.

FROM PROF. J. C. BRANNER, STANFORD UNIVERSITY, CAL.

The Manganese Deposits of Bahia and Minas, Brazil. Oil-bearing Shales of the Coast of Brazil. Proceedings, Washington Acad. of Sciences, Vol. II, pp. 185-201. Bulletin U. S. Geological Survey, No. 143. The Origin of Beach Cusps. Ants as Geologic Agents in the Tropics. Observations upon Erosion in Hydrographic Basin of Arkansas River above Little Rock. The former Extension of the Appalachians across Mississippi, Louisiana, and Texas. Thickness of Ice in Northeastern Pennsylvania during the Glacial Epoch. Geology in Its Relations to Topography. Phosphate Deposits of Arkansas. Bauxite Deposits of Arkansas.

FROM STATE BOARD OF HEALTH OF MASSACHUSETTS.

Thirty-first Annual Report, 1899.

FROM L. C. FERRELL, SUPT. OF DOCUMENTS, WASHINGTON, D. C.

Special Consular Reports, Vol. XVI, Supplement; Vol. XIX; Vol. XX, part 1; Vol. XX, part 2; Vol. XX, part 3; Vol. XXI, part 1; Vol. XXI, part 2; No. 239. Exports Declared for U. S., fiscal year 1899. Exports Declared for U. S., quarter ended June 30, 1900. Consular Reports, No. 241. Arizona, Report of Governor, 1899. Preliminary report of Reservoir sites in Wyoming and Colorado. Five Civilized Tribes, Sixth Annual Report of the Commission, 1899. Foreign Commerce and Navigation, Vol. II.

From Institution of Civil Engineers, London.

Abstracts, Vol. CXLII, 1899-1900, part 4.

FROM U. S. GEOLOGICAL SURVEY, WASHINGTON, D. C.

Twentieth Annual Report, 1898–1899, parts 2, 3, 4, 5, 7. Map of Alaska, Showing Known Gold-bearing Rocks. Preliminary Report on Cape Nome Gold Region.

FROM CHARLES WARREN HUNT, SEC'Y., AM. Soc. CIVIL ENGINEERS. Catalogue of Library, June, 1900.

FROM EMIL L. NUEBLING, READING, PA.

Thirty-fifth Annual Report, Board of Water Commissioners, 1899-1900.

FROM UNIVERSITY OF CALIFORNIA, BERKELEY, CAL.

University Chronicle, Vol. III, No. 5, November, 1900.

FROM PUBLIC LIBRARY, CITY OF BOSTON.

Annual List of New Books, 1899-1900.

FROM G. EIFFEL, PARIS, FRANCE.

Scientific Work on the Tower of 300 Meters, 1899-1900.

FROM SOCIETY OF CIVIL ENGINEERS OF FRANCE.

Reception to Delegates, 1900.

FROM GEOGRAPHICAL SOCIETY, PHILA.

Bulletin, December, 1900.

PERIODICALS RECENTLY BOUND AND ADDED TO THE LIBRARY.

Engineering News, Vol. IX, 1882; Vol. XI, 1884; Vols. XIII and XIV, 1885; Vols. XXVII and XXVIII, 1892; Vol. XXIX, 1893; Vols. XXXIII and XXXIV, 1895; Vols. XXXV and XXXVI, 1896; Vol. XXXIX, 1898; Vol. XL, 1898; Vol. XLI, 1899; Vol. XLII, 1899. Electrical World, Vols. XIX to XXII, 1892-1893; Vols. XXVII to XXXIII, 1895-1899. Engineering Record, Vols. XXXVII to XL, 1898-1899. Am. Inst. Mechanical Engineers, Vols. XIX to XXI, 1897-1899. Journal of the Franklin Institute, Vol. LXIX, 1875; Vols. CV and CVI, 1878; Vol. CXVI, 1883. Am. Society of Civil Engineers, Vols. XX and XXI, 1889; Vols. XXXIX to XLIII, 1898-1900. Association of Engineering Societies, Vol. XX, 1898; Vol. XXII, 1899.

## THE ENGINEERS' CLUB OF PHILADELPHIA,

House, No. 1122 Girard Street,

PHILADELPHIA, PA.

# ANNUAL REPORT OF THE BOARD OF DIRECTORS FOR THE FISCAL YEAR 1900

JANUARY 5, 1901.

### TO THE ENGINEERS' CLUB OF PHILADELPHIA:

In compliance with the requirements of the By-Laws, the Board of Directors offers the following report for the year ending December 31, 1900.

Eighteen regular meetings of the Club were held, at which the maximum attendance was 92, and the average about 70. Nine stated and three special meetings of the Board of Directors were held, at all of which a quorum was present.

One honorary, 20 active, 4 associate, and 9 junior members were elected; 13 active and 4 associate members resigned; and 7 active members and 1 associate member were dropped from the rolls.

The record of death is as follows:

Emile Geyelin, Active Member, died June 25, 1900. J. Simpson Africa, Active Member, died August 8, 1900. Thos. P. Lonsdale, Active Member, died November 9, 1900. James S. Doran, Active Member, died December 17, 1900.

The membership of the Club on December 31, 1900, as compared with the previous year, was as follows:

		1899.			1900.	
Class.	Resident.	Non-Resident.	Total.	Resident.	Non-Resident.	Total.
Honorary		1	1	1	1	2
Active	283	115	398	280	121	401
Associate	19	1	20	18	1	19
Junior	12	5	17	15	4	19
	314	122	436	314	127	441

Eight hundred and eighty-three books were labeled and entered on the card index. The filing-case installed in the reading room has been a great convenience. Forty-seven volumes of transactions and journals have been bound, but this work has been delayed by the difficulty of securing missing numbers.

The following papers have been presented:

JANUARY 6TH.—Biographical Sketches of the Professional Careers of William Hasell Wilson and Herman Haupt. William B. Wilson.

JANUARY 20TH.—Address of Retiring President. Esthetics and the American Engineer. Francis Schumann.

FEBRUARY 3D.—The Utilization of Bacteria and Bacteriologic Methods in Modern Sanitary Engineering. A. C. Abbott.

FEBRUARY 17TH.—Informal Talk on Tree Trunks as Bench-Marks. Henry Leffmann.

MARCH 3D.—The Canadian Pacific Railway from Laggan to Revelstoke, British Columbia. William S. Vaux, Jr.

MARCH 17TH.—The General Chemical Aspects of the Corrosion of Structural Metals and the Principles involved in their Protection. A. H. Sabin, New York.

APRIL 7TH.—The Drainage and Protection of the Philadelphia Lowlands. Harrison Souder.

APRIL 21st.—Coal-tar and Coal-tar Products. Henry Leffmann. Informal Talk on the Recent Failure of the Austin Dam. H. M. Chance.

MAY 5TH.—Modern Methods of Manufacturing Illuminating Gas; with a Description of its Distribution under High Pressure. Frederick H. Shelton.

MAY 19TH.—The Bacterial Treatment of Sewage in England. William Easby.

JUNE 2D.—Pumping Engines of the Philadelphia Waterworks. Henry G.

Morris.

SEPTEMBER 15TH.—The Water-jet as an Aid to Engineering Construction. L. Y. Schermerhorn.

OCTOBER 6TH.—Transmission of Gas and Air through Pipes, and the Transmission of Power by Compressed Air. Frederick W. Gordon.

OCTOBER 20TH.—The Strength of the Ideal Column and its Relation to the Safe Load on a Practical Column; Some New Formulas and their Comparison with Older Ones. Carl G. Barth.

NOVEMBER 3D.—Topical Discussion on American Isthmian Canals. James Christie, Edwin F. Smith, and L. Y. Schermerhorn.

NOVEMBER 17TH.—Pennsylvania Forests and What is Necessary to their Restoration. J. T. Rothrock.

DECEMBER 1st.—High-speed Toothed Gearing. James Christie. Interchangeable Gearing. Wilfred Lewis.

DECEMBER 15TH.—Celebration of the Twenty-third Anniversary of the Foundation of the Club, held at New Century Drawing Room. A Brief History of the Club. Edgar Marburg. Popular Features of the Paris Exposition. Carl Hering.

Four numbers of the Proceedings were issued, comprising volume XVII. An exact statement of the cost of publication can not be made, as some items belong in part to other volumes and other accounts, but the following is a close approximation:

Printing	<b>\$</b> 556	73		
Copyright and office expenses				
Wrappers and stationery	16	00		
Illustrations	148	18		
Reprints				
Reporting discussions	103		\$881	00
Net earnings for advertisements, all of which will be paid				
Sales of volume XVII	20	00	376	00
Net cost			\$505	00
Additional sales of numbers of Proceedings issued prior to 1900	<b>\$6</b> 8	80		

### EXPENDITURES FOR 1899 AND 1900.

	<b>1899.</b>	1900.
House	\$2872 96	<b>\$2</b> 876 76
Proceedings	1352 85	1131 17
Library		516 32
Information		104 70
Office		497 37
Salaries	1073 89	1080 00
	\$6051 87	\$6206 32

In these statements the gross expenditures are shown, but for a proper expression of the actual outlay for 1900, receipts should be deducted as follows:

House	\$ 57	48,	leaving	net	expenses	\$2819	<b>28</b>
Publication						<b>532</b>	

In the library account, the expenses for reference library and filing-case incurred during 1899, are included; also \$76.00 subscriptions to reference library. The deductions for these items are \$461.35, leaving net outlay for 1900, \$54.97, to which should be added bills payable \$48.75, making a total of \$103.72.

### ASSETS AND LIABILITIES, DECEMBER 31, 1900.

#### Assets.

Furniture and fixtures, as per appraisement February 17, 1900\$1707 60 Furniture added during 1900		
Total furniture and library	<b>\$</b> 3857	60
U. S. Bond, issue of 1898 (par \$500), market value		
On denosit, hearing interest at three per cent.	500	
" " two " (less dues for 1901, \$527.59)	55	
	\$4963	36
Liabilities.	•	
Unpaid bills (House, \$2.00; Library, \$48.75)	<b>\$</b> 50	75
Excess of assets over liabilities	\$4912	61

### Respectfully submitted,

EDGAR MARBURG, President. L. F. RONDINELLA, Secretary.

### REPORT OF THE TREASURER FOR THE FISCAL YEAR 1900.

Receipts.	Expenditures.
Receipts.         Initiation fees (33)       \$165 00         1899 dues       155 00         1900 dues       4462 50         1901 dues       527 59         —       \$5310 0         Proceedings (advertisements)       509 50         Proceedings (sales)       88 80         Interest on deposits       31 6         Interest on investment       15 0         Keys (sold)       4 7         Slides (sold)       3 4         Telephone       4 9         Billiards       49 0         Library       76 0         Total receipts       \$6093 2         Cash balance, Dec. 31, 1899       1196 4	Salaries :   Secretary
	Anniversary committee 57 50
	Total disbursements\$6206 32 CASH BALANCE, DEC. 31, 1900, 1083 35
<b>\$7289</b> 6	7 \$7289 67

Respectfully submitted,

GEO. T. GWILLIAM, Treasurer.

We have examined the books and accounts of the Treasurer, compared them with the original vouchers, checks, and bank-book, and find them to correspond with the Treasurer's statement submitted above.

W. P. DALLETT,
H. W. SPANGLER,
RICH'D L. HUMPHRRY,

Auditors.

## **PROCEEDINGS**

OF

# THE ENGINEERS' CLUB

OF PHILADELPHIA.

ORGANIZED DECEMBER 17, 1877.

INCORPORATED JUNE 9, 1892.

Note.—The Club, as a body, is not responsible for the statements and opinions advanced in its publications.

Vol. XVIII.

APRIL, 1901.

No. 2.

# PENNSYLVANIA FORESTS AND WHAT IS NECESSARY TO THEIR RESTORATION.

JOSEPH T. ROTHROCK.

Read November 17, 1900.

FORESTRY is a business. Sentiment has in it properly but a secondary place. If it can not be made to pay, it is too costly to be indulged in as a luxury; but, looked at from this standpoint, we often make the mistake of supposing that timber is the only product of forestry and the only element which enters into the decision of the question as to whether or not forestry pays. The forestry interest has its by-products, and these are often more important, in their bearing upon our industries, than the chief product. I propose to consider the subject under the following heads:

First, forests as they were in Pennsylvania.

Second, forests as they are in Pennsylvania.

Third, forests as they ought to be in Pennsylvania.

Fourth, what is necessary to bring about the desired condition of our Pennsylvania forests.

Pennsylvania originally was one of the best-timbered States along the Atlantic seaboard. So far as I am informed, there were but few areas of any size upon which a dense growth of timber did not exist. Here and there a beaver dam can still be found, or, at least, its

1

remains traced. Occasionally an extensive bog existed, which may have owed its origin to an old or recent cause. In the event of its being recently formed, it was bare of trees. If of earlier origin, as in the case of the Tamarack swamp in Clinton County, it was covered with trees, which were usually of a northern type. But, considered as a whole, Pennsylvania was a forested area; there were but few barrens or prairies, and if any existed, they were of small area. But very few of our most important trees were distinctly localized. them to a greater or less extent were found in almost every portion But, on the other hand, there were several regions of the State. which were specially characterized by the size and abundance of particular species. For example, we may say that the most striking features of the forests in the southeastern part of the State were the white oak, the hickories, the chestnut, the black walnut, the tulip poplar, and the swamp maple.

These gave the earliest and most lasting impression to an observer. Associated with them, but less prominent, were various other species —the beech, the black and scarlet oaks, and the yellow pine. Even the white pine, which was found in its greatest abundance in the central, mountainous portions of the State, occurred in a sporadic manner in the southeastern portion. The sugar maple, the beech, the black and yellow birch, which are now found most abundantly in the northern and central counties of the Commonwealth, were nevertheless also represented in the southeastern portion. On the other hand, taking the higher central axis of the Commonwealth, which cuts diagonally across the State, the prevailing trees were white pine and hemlock; the latter being more common in the northeastern half of the higher portion of the State, while the white pine, though not wholly excluded from the northeastern portion, constituted the chief source of forest wealth in Lycoming, Tioga, Potter, McKean, Warren, Forest, Elk, Cameron, Clearfield, Jefferson, Indiana, Cambria, and Somerset Coun-The whole of this belt was practically one of high ground; and in spite of the erosion which has occurred, it is along this belt that the culminating points of the State are still found. The Elk Mountains of Susquehanna County, it is said, rose above the glacial mass. Ganoga Lake is about 2200 feet above tide, and in Somerset County, according to a recent survey, an altitude of nearly 3000 feet is found. Associated with the white pine and hemlock were the black and yellow

birch, the beech and sugar maple; and these gave, it may be said, a sort of secondary character to the forest. In regions where the white pine or the hemlock did not predominate, and where the ground was rocky and steep,—for example, on the dryer ridges,—the rock oak, locust, pitch pine, and chestnut prevailed. Once, however, the Allegheny River was passed, it was noted that the oaks predominated and the cone-bearing trees correspondingly decreased. There were in the southwestern portion of the State a few characteristic trees of the lower Ohio valley. The coffee tree, the Carolina poplar, the cucumber tree, and the honey locust were representatives of that group.

It is hard to estimate even approximately the quantity of timber which originally stood in the Pennsylvania forests. It would not, however, be excessive if I were to say that the hard woods averaged from 2500 to 3000 feet board measure per acre. The hemlock, in its region of best growth, would vary between 5000 and 30,000 feet to the acre, and the white pine often surpassed the hemlock. It is more than likely that we to-day underestimate the maximum size of the trees which were found in our forests at that time. A diameter of six feet at four feet above the base for white oak and white pine was probably not unusual. The chestnut attained to even a greater diameter, and hemlocks of five feet in diameter were by no means Such was probably the condition of the Pennsylvania forests as seen by the earliest settlers. Two causes have been at work in their removal: First, the necessity for clearing the ground to open up farms; and, second, the lumbering industry. It is safe to say that the most prosperous period of the lumbering industry and also the most depressed period have been within the memory of men still living. It is just one hundred and eight years since the first saw-mill was built in Lycoming County. And it may truthfully be said that this was the beginning of the end of our Pennsylvania forest. task to which the various lumbermen of the period addressed themselves with an activity that had been previously unexampled was supplying, from Pennsylvania, the largest market which they could find for their lumber. If the most conservative methods of removing the timber had been followed, it would still have been merely a question of time before the present scarcity of timber in this State would have been reached, from the simple reason that no one dreamed of the possibility or necessity of forest restoration. Men did not know, and

would not have cared if they had known, that they were removing timber faster then it was being produced. But in addition to these excessive drains upon our forests, fires were allowed annually to do their worst over the whole of the area from which the lumber had been cut. Men neither noted nor heeded the fact that all of the second growth, nature's spontaneous offering, by means of which the forests would have been restored in time, was so completely destroyed. In most instances it was so badly injured that its maturity was indefinitely postponed and its value seriously impaired.

We may now consider our second head:

### Forests as They Are in Pennsylvania.

I do not know that I can make a more pointed statement of the actual condition of our forests than to say the white pine has always been regarded as the most desirable lumber in our Pennsylvania forests, and that hemlock never became a lumber of recognized value until white pine became scarce. In 1875 there reached Williamsport 190,783,220 feet of pine and hardwood. That same year there reached Williamsport 19,963,736 feet of hemlock. In 1894 there reached Williamsport 8,928,204 feet of pine and hardwood. The same year there reached Williamsport 30,739,404 feet of hemlock. In other words, in 1875 the pine and hardwood reaching Williamsport was about nine and a half times as great as the quantity of hem-But in 1894 the quantity of hemlock reaching Williamsport was about three and a half times as great as the quantity of pine and hardwood. In the early history of Cincinnati, Pennsylvania sent white pine there to enter into the construction of buildings. In 1900 Pennsylvania brings white pine from Michigan and Minnesota for In 1855 the white pine forest of Pennsylvania, extendher own use. ing over the counties of Lycoming, Tioga, Potter, McKean, Warren, Forest, Jefferson, Clearfield, and Somerset, was reckoned as inexhaustible. But to-day in those same regions they are roofing their houses with shingles from Oregon and weatherboarding them with poplar siding from Tennessee. It is doubtful whether one of our oldtime frigates or a Cope-liner could now be built from timber found in this State within a radius of thirty miles from the city of Phila-Mature black walnut is to-day almost exterminated in the eastern half of the State. Our railroads in this State, after exhausting

the white oak and rock oak, were constrained, many of them, to use chestnut for cross-ties. Now they are bringing in for this purpose yellow pine from the Southern States. The smaller tanneries of the State have been obliged to suspend operations because of the pressure from the great tanning trusts; and one after another the plants of these trusts themselves are now being abandoned from lack of bark to operate upon; as, for example, Ledgedale and Proctor; and it is but a question of a few years before the majority of them will be obliged to suspend operations or seek their supplies in some other region. Of the vast body of white pine which existed in this State in 1860, but two areas of considerable size now remain. I believe I will be justified in saying that all of the really good white pine in Pennsylvania could easily be reduced to lumber by two of our largest mills within a single year. There are regions, notably along Kettle Creek, where considerable bodies of mature hemlock can still be found. In spite, however, of the apparently large body of timber, no one who is conversant with the facts will be deceived; because what remains to be exterminated is but a fraction of what has already been destroyed. It may seem strange to you, gentlemen of The Engineers' Club, that I should deal in these general statements, instead of in figures. But I do so designedly. After more than twenty years' experience in the forestry work, I have reached at last a profound distrust of timber statistics as they have been presented. I have seen thousands of acres in this State pass through the successive stages of lumbering. the white pine, then the hemlock, then the mine-prop timber, then the wood acid factory and pulp mill, and lastly the stage of tanning ex-I have seen regions containing yellow pine of but 2000 feet to the acre, which had been rejected as worthless by those who had previously removed the white pine and the hemlock, come to be regarded as heavily timbered, and so offered in the market. Gentlemen, there is but one conclusion to draw from these statements; to me they are far more significant than columns of figures. And I have a profound distrust of the statements recently made that there still exists in this State 34 per cent. of our area which is in mature or growing timber. I believe that there is not 20 per cent. of the area of this State now covered with timber which has now, or ever will have, commercial It is very easy to see how one may be misled upon this question, by considering as timber that which ought to be classed as simply brush. And this brings me to the third head:

## FORESTS AS THEY OUGHT TO BE IN PENNSYLVANIA.

The function of every acre in this State is to produce its best crop. What that best crop shall be depends very largely upon market condi-Much of the ground which is now cultivated does not pay the farmer for his labor when wheat is at sixty cents a bushel, though it might have been deemed satisfactory agricultural land when wheat could be sold for a dollar or more a bushel. Under existing conditions it would be worth more to the owner with the original forest remaining upon it. But, unfortunately, one is unable to predict how long the relative values of wheat and lumber will remain as they now On the other hand, it is entirely safe to say, if we leave the owner out of the question and consider only the public interest, what lands should be maintained in timber; because there are so many other interests than those of agriculture and lumbering to be considered. There are slopes so steep that they should be maintained perpetually in timber, without regard to the agricultural interests. There are drainage areas which, from their water-collecting power, should be kept in a forested condition in order to supply our cities and towns. There are outing grounds for our citizens which should be maintained as such in the interest of public health. There are mountain districts, now almost valueless, which, as water-power comes to be more highly appreciated, will become manufacturing centers, and where this waterpower can be maintained in even flow only by retaining the forests There are vast districts so poor about the head-waters of the streams. by nature and so impoverished by frequent fire that nothing but State control can render them capable, under existing laws, of producing All these facts have to be considered. anything but timber. am quite sure that when we come to consider all these elements of the problem we would be justified in the statement that at least one-sixth of the area of this State should be given over to forests. There is another element of the problem which I have hesitated to allude to: I mean the question of pure air. It is a perfectly well-known fact that the greatest oxygen producer of which we have any knowledge is The tendency of animal life, of manufacturing establishments, and of many other things, is to render the atmosphere impure;

but in spite of these known facts one may well halt before assuming that this should be made an argument in favor of forest maintenance. When, however, so distinguished an authority as Lord Kelvin raises the question as to whether we are not permanently injuring the atmosphere, one must give the problem a measure of attention. There is another feature to which I cannot close my eyes. My recollection extends back almost half a century. During all this time I have had in a greater or less degree the condition of agriculture brought to my notice. I will not here raise the question of rainfall, or the rate of run-off from our streams. But I cannot remember in my earlier life a period when for several successive years our autumn crops have been so seriously endangered as recently by a prolonged drought at the time when moisture was most needed. The thought of irrigation as a measure of safety for our crops never entered the minds of our farmers twenty years ago. It is now agitated more and more with each recurring season. As I travel through the State and note the low condition of our streams, I find that the areas which should be covered with water, and be therefore evaporating areas, are seriously reduced during the late summer and autumn. All additional dryness of the atmosphere must be compensated for if possible from some source; and from every foot of open ground, the ground upon which our crops are raised, the thirsty atmosphere vaporizes and carries off the water. I do not believe that this phase of the problem has ever received the attention which it merits. I am convinced that unless by some means the even flow of water in our streams is maintained, our agricultural. interests will be seriously injured. And I need not remind you that of all the helpful forces which we can control to accomplish this, there is nothing so potent as a proper proportion of forest land. These, however, are some of the side issues of this problem.

I think I may safely assume that this audience recognizes the importance of the necessity for forest restoration. The remaining question is, What is necessary to bring about the desired condition?

First of all, we may assume that it could be brought about; that there is no inherent impossibility in it, and that the work could be made to pay the State, and, apropos of this remark, allow me here to introduce a quotation from "Some Business Problems of American Forestry," by Dr. Schenck, page 25. What follows, relates to the State of Pennsylvania:

- "Premises:—The State of Pennsylvania decides to engage in State forestry, and to that end takes up a loan of \$1,450,000, at 4 per cent., which is to be used as follows:
- "\$1,000,000, for purchase of 1,000,000 acres at the head-waters of the rivers; \$50,000 for lawyer's fees, surveys, demarcation, etc.; \$150,000 for roads, etc.; \$250,000 for defraying the annual salaries of superintendents and rangers.
- "After the road system is developed, twelve years from to-day, an annual revenue of 10 cents per acre per annum will be derived, under conservative management, and it is expected that this revenue will gradually increase at the rate of 3 per cent. per annum.
- "Question: (a) Within how many years will the forest itself be able to redeem the loan?
  - "(b) What is the forest worth after the loan is redeemed?
- "Result: (a) The loan can be entirely redeemed within forty-three years after the twelfth year, or within fifty-five years from to-day.
- "(b) The forest, freed from all incumbrances after fifty-five years, and producing annually \$356,000, with prospect of an annual increase of revenue equaling 3 per cent., is worth about \$35,600,000."

If the people are ready to spend \$58,000 for twelve years, they will gradually build up a valuable forest.

As a statement, this is very encouraging. But practically the thing cannot be done in Pennsylvania, because there are constitutional reasons against the proposed loan, and these cannot be set aside. Fortunately indeed for this State, the same results can be accomplished just as certainly, and almost as speedily, without a loan; and with the aid of very little legislation. The truth has so often been stated that I hesitate to reiterate it here now. The one obstacle, in fact, the only obstacle, to a spontaneous restoration of our forests in this State is the prevalence of forest fires. There are some truths so familiar that their re-statement becomes nauseating, both to speaker and hearers; but, like the truths of the gospel, they must be repeated; and for the hundredth time in this city I again affirm that if the timberless, rocky highlands of the State be effectually protected against fire, in thirty years the forestry problem in this State would be solved. And in this connection allow me to say that very little additional legislation is necessary for the accomplishment of the desired results.

In spite of all the objection that has been made to the existing fire

laws of the State, the fact is that wherever they have been fairly enforced they have done their work. And I make the statement here today, without fear of successful contradiction, that the parties who are responsible for much of the loss of property by annual forest fires are the county officials, who have failed to use judiciously the legal remedies which the law has provided. The chief objections to the existing laws are that they are new, that their execution requires some work and involves some expense (which the State shares), and that the officials who enforced them may lose some votes. Our public-school system was condemned when it was new. Nothing good or desirable can be had without expense; and the official who refuses the duty which he has sworn to perform is unworthy of any office. If these laws are bad, enforce them. It is the surest way to repeal them. If they are good, enforce them. It is the surest way to find their value.

There are counties in this State where the destruction of timber property aggregates thousands of dollars a year, where annual forest fires are cursing the county with an ever-increasing barrenness, and where, in the same counties, the officials refuse to pay the constables well-earned fees for suppression of forest fires, or refuse to appropriate a penny of money to bring to justice those who have robbed their constituents of property which the county demanded and received money for protecting. No language can be too strong to depict the injustice, the illegality, and the criminality of such a policy. In the year 1899 sixty-eight fires were reported to this office, to the Commissioner of Forestry, and the causes definitely stated. In forty-seven instances the fire originated with farmers who were burning brush, and there were twenty-one cases from all other causes. It is absurd to say that those who created the great majority of these fires could not have been apprehended and punished. For in most instances the cause and point of origin were widely known to the community. Some of the instances were notorious, and awakened public condemnation. And yet I know of but a single instance where in that year an offender was brought to justice. Is it any marvel that ignorant or vicious or careless people year after year prevent the restoration of timber in this State? Is it any wonder that public-spirited citizens decline to plant trees which they know will be destroyed?

This state of affairs is about as bad as it well could be. So far as I know, there is but one thing which could be worse; and that is to

allow it to continue when it can be so easily prevented. I believe that any honest, intelligent official of this State, who is charged with the duty of attending to it, in five years could break up the whole of this system of spring and autumn forest fires; provided he were allowed, by appropriation, a sufficient sum to employ ten honest, determined, capable detectives, and the means to employ proper legal talent when the criminals were arraigned. It is the common custom to charge most of the losses by forest fire upon the railroads of the Commonwealth; and while it is true that they do create more fires than they ought to, and are culpably negligent, very often, as to the conditions of their locomotives, they do not cause the majority of our forest fires. The destructive season of 1900 fully confirms all that I have stated of 1899. I have taken the trouble, individually, to trace a considerable number of these fires to their origins, and they simply repeat the story of the previous year. In the sweeping condemnation that I have made I desire here especially to name three counties in which efforts have been sincerely made to bring the criminals to justice, and in which success has crowned the effort. I allude to Lycoming, Perry, and Somerset Counties; and I desire here to express my gratitude to the officials of those counties for their hearty cooperation. In doing this, I do not mean to imply that all the other counties of the Commonwealth have failed utterly to do their work, for this would not be true. I can simply say that no others have done it so well as the counties I have named.

Turning from this aspect of the question, let us for a moment consider the State Forestry Reservations, the work that is supposed to be accomplished by them, and how it is hoped to do it. It is safe to assume that in the near future the State of Pennsylvania will be in possession of 300,000 acres of land which is either in forest or will become forest land. This, however, is but a mere fragment of what it should possess. But it is enough to induce the most serious thought as to what is to be done with it. In other words, the State of Pennsylvania has reached a time when it must for itself establish a well-defined forest policy. This policy should be well considered by capable men. And when once decided upon, it should not be changed every four years. It would be as destructive to the forestry interest to do this as it would of the educational interest of the State if a new policy were to be inaugurated with each new administration. Change

the officials if you must, but allow a well-matured plan to be worked to a successful issue. I may be allowed to say that the officials who are now charged with this duty are considering, first, what is absolutely the best plan; and, second, what is the most available plan of commencing the work of forest restoration upon the ground now in possession of the State. For you must bear in mind that the best thing cannot always be done. The Legislature will probably be asked to make provision for the maintenance of a reasonable number of forest rangers, who should at the same time that they are protecting the ground against intruders, suppressing forest fires, and bringing to justice those who create them, be on the lookout for those who are violating the game, fish, and health laws, and making special note with regard to the capabilities of the soil for restoration of special kinds of timber and the best method of producing it. For the present, the chief forestry officer of the State should make it his duty to be thoroughly familiar with all the ground possessed by the State, and he should have authority to open up and keep up such fire lanes as in his judgment will enable his employees most successfully to prevent the spread of destructive fires. Means should be furnished also for the creation of local nurseries in the immediate vicinity of the points where the young trees are needed. In due time it will be necessary to remove, as it matures, or for other reasons, timber which has become marketable. And this work should not be done after the destructive fashion of the American wood-chopper. No doubt he would be the most efficient agent under proper direction, and this direction should be provided for him. There are certain trees which, so to speak, should have the right of way, wherever conditions of soil are suitable. Such, for example, are the white pine, the white oak, the chestnut, the locust, and, I am now commencing to believe, the shell-bark hickory and the walnut.

Two new claimants for our favor are under trial The Carolina poplar is a hardy, rapid grower which can be utilized in the production of wood pulp. I have a firm faith in its future over a large portion of our State.

From time to time we have heard and continue to hear the most astounding statements concerning the value of the western catalpa. We have a reasonable certainty that it can be made to produce good fenceposts, that it is a rapid grower, and a hardy tree. But I am bound to

confess, in spite of the assertions that it will make a good railroad tie, that I do not believe it. In every instance that I have traced popular rumor to its source, the fitness of the western catalpa for railroad ties has been rendered more and more doubtful. All rumors to the contrary notwithstanding, I do not know a single instance in which large bodies of western catalpa have been grown to a merchantable size or a single case in which the mature western catalpa has had a fair trial as a railroad tie. I am perfectly free to confess that I do not believe its light structure would ever successfully enable it to stand the crushing weight of heavy railroad trains, though I do believe, so far as mere durability is concerned, that it lasts well in contact with the soil.

What I have said thus far refers especially to the production of timber on State lands. There is another aspect of the forestry problem which merits some consideration. I mean the art of forestry as related to individual enterprise.

Naturally, the State holdings of land would be on a higher and more barren portion of the Commonwealth, where larger areas can be had; if, however, this were the only aspect of forestry, it is very clear that a large portion of the State would be deprived of the benefits growing out of the immediate presence of considerable sized bodies of timber land. Our extreme eastern and extreme western portions of the State, in fact, all of the more fertile portions of the Commonwealth, have areas which are unfit for agriculture which belong to private parties, and which could most advantageously be placed in timber if equitable conditions existed. Before this can be done, however, it is absolutely indispensable that the State shall in some way, either by rebate of taxes or by direct bounty, place a premium upon production of timber. Or, rather, it would have been better to have said that it make operative laws which are already on the statute-books.

The Ziba T. Moore law, approved May 25, 1897, reads as follows:

#### "AN ACT

"For the Preservation of Forests and Partially Relieving "Forest Lands from Taxation.

"Section 1. Be it enacted, &c., That in consideration of the public benefit to be derived from the retention of forest or timber trees, the owner or owners of land in this Commonwealth, having on it forest or timber trees of not less than fifty trees to the acre, and each of said trees to measure at least eight inches in diameter at a height of six feet above the surface of the ground, with no portion

of the said land absolutely cleared of the said trees, shall, on making due proof thereof, be entitled to receive annually from the commissioners of their respective counties during the period that the said trees are maintained in sound condition upon the said land, a sum equal to eighty per centum of all taxes assessed and paid upon the said land, or so much of the said eighty per centum as shall not exceed the sum of forty-five cents per acre: *Provided*, however, That no one property owner shall be entitled to receive said sum on more than fifty acres.

"Section 2. All acts or parts of acts inconsistent herewith are hereby repealed."

This act, it will be clearly noted, applies to mature and maturing timber. I desire now to call your attention to another act, which was approved the first day of June, 1887:

#### "AN ACT

- "For the Encouragement of Forest Culture, and Providing "Penalties for the Injury and Destruction of Forests.
- "Section 1. Be it enacted, &c., That in consideration of the public benefit to be derived from the planting and cultivation of forest or timber trees, the owner or owners of any land in this Commonwealth planted with forest or timber trees in number not less than twelve hundred to the acre, shall, on making due proof thereof, be entitled to receive annually from the commissioners of their respective counties, during the period that the said trees are maintained in sound condition upon the said land, the following sums of money:
- "For the period of ten years after the land has been so planted a sum equal to ninety per centum of all the taxes annually assessed and paid upon the said land, or so much of the ninety per centum as shall not exceed the sum of forty-five cents per acre.
- "For a second period of ten years, a sum equal to eighty per centum of the said taxes, or so much of the eighty per centum as shall not exceed the sum of forty cents per acre.
- "For the third and final period of ten years, a sum equal to fifty per centum of the said taxes, or so much of the said fifty per centum as shall not exceed the sum of twenty-five cents per acre.
- "Provided, That it shall be lawful for the owner or owners of the said land, after the same has been so planted for at least ten years, to thin out and reduce the number of trees growing thereon to not less than six hundred to the acre, so long as no portion of the said land shall be absolutely cleared of the said trees;
- "And provided also, That the benefits of this act shall not be extended to nurserymen or others growing trees for sale for future planting.
- "Section 2. The owner or owners of forest or timber land in this Common-wealth, which has been cleared of merchantable timber, who shall, within one\*

<sup>\*</sup>The law now allows notice to the commissioners at any time. The one year limitation has been repealed.

year after the said land has been so cleared, have given notice to the commissioners of their respective counties that the said land is to be maintained in timber, and who shall maintain upon the said land young forest or timber trees in sound condition, in numbers at least twelve hundred to the acre, shall, on making due proof thereof, be entitled to receive annually from the commissioners of their respective counties the sum of money mentioned in the first section of this act: Provided, That the first period of ten years shall be counted from the time that the said land has been cleared of merchantable timber, and that, after the said first period of ten years, the number of trees upon the said land may be reduced as in the first section is provided."

You will readily perceive that these two laws would, of themselves, be a sufficient inducement to many land-owners to either place or allow portions of their land to remain in timber, if they were enforced. Up to this time, however, there has been on the part of many county commissioners an attempt to evade the payment of these tax rebates. I think, however, that I am safe in the statement that we are now in the way of an enforcement of these laws. The farmers have at length come to realize that, on the one hand, they have the alternative of paying taxes on land from which they receive nothing, or, on the other hand, of securing a rebate of taxes which in ten years, on fifty acres of land, would amount to two hundred and twenty-five dollars; and having their timber still remaining to grow into a greater value with each successive year. Surely no man of ordinary business prudence would hesitate long between these alternatives.

It must not be assumed because the forestry movement has made such substantial gains in this State, in the last few years, that it has an uninterrupted progress before it. The best that can be said is, that it has grown sufficiently large to attract attention; and this, as you know, always invites attack. You may be very sure, however, that the ultimate issue is not in doubt. Sooner or later, and through greater or less tribulation and discouragement, the State of Pennsylvania will have an established and productive forest policy, in which the citizens of this Commonwealth will be hardly less interested than they are in their public-school system.

#### DISCUSSION.

JOHN BIRKINBINE.—Pennsylvania has an average rainfall of 43 inches: ranging from about 30 inches in unusually dry years to 62 inches in extraordinarily wet years. If we collect one-half of the average annual rainfall from drainage areas

in the State, the average daily supply would be above one million gallons from each square mile. This one million gallons is not the daily run-off, but represents what is obtainable from one square mile by impounding the water resulting from rains in reservoirs, and discharging this therefrom at a uniform rate.

In providing for a water-supply of from eighty to ninety million gallons a day from streams whose head-waters are at the crest of the Allegheny Mountains, the forestal conditions have received careful consideration, and I have had to base estimates of flow upon the presence or absence of forests. The rapid denudation of the timber, encouraging a rapid run-off from steep hillsides, has necessitated using as a basis for determining storage capacities required a minimum run-off of but 60,000 gallons a day, a square mile, while for carrying freshet water in enormous volumes the spillway areas were made most liberal. In late years engineers have been forced to reduce the formerly accepted ratings for minimum stream-flow in estimating storage capacities and increase the maximum controlling spillway dimensions to care for freshet flow.

I do not claim, nor would Dr. Rothrock, that forests make rain. We do, however, believe that forests conserve rain by the moss or forest floor, which holds water as a sponge, and prevents it from flowing off with great velocity. This forest floor catches the fine particles of dirt, as in a filter. In a wooded area you have this spongy floor and also protection from radiation; therefore, the water which falls upon it will run off with less rapidity. If snow falls, it is protected, and all know that snow remains in the woods longer than outside.

Those interested in the forestry movement have, for a number of years, endeavored to educate public sentiment, and I would be delighted to see the majority of the members of The Engineers' Club active in the forestry movement. Engineers, as a rule, are progressive, and surely as good citizens we can look ahead and say we want the benefit not only for ourselves, but those who come after us. Forest protection conserves a very valuable product for construction—a product which we can form readily and with which a great many things can be cheaply and quickly accomplished. I do not expect railroads will always use wooden railroad ties. I have ridden over metal ties and believe the time will come when they will be very largely used. Nor need we go back to wooden buildings, but there are still thousands of uses for timber. Of all things the forestry problem, as affecting our water-supply, collecting areas, appears to me the most important; not simply from the standpoint of getting the water collected and delivered without pumping, but from the standpoint which you and I must recognize is coming—a more liberal utilization of water proper. It was my privilege some years ago to address the Club on water renaissance, indicating that water problems are being studied and water-power improved.

If we did not have to figure for so low a minimum flow, if we did not have to provide for such enormous maximum flows, there are a great many works which could be simplified.

We have the maximum and minimum stream-flow to contend with in building railroads; bridges and side-cuttings are more expensive; buildings along the rivers must be constructed to withstand freshets, and engineers should be in

favor of any project which will look toward a restoration and the preservation of

Dr. Rothrock spoke about the farmers. I think often they are their own The farmers will say a great deal about good roads, but hardly one out of twenty will lend his hand to make a good road. If you give him a good road, it will not be long before he hauls heavy loads over it and cuts it when The farmers are at fault in not taking care of their properties as regards roads and forest fires. The railroads are responsible for many of the forest fires, and the men who take their cows out on somebody's lot and set fire to the underbrush to get good grazing ground are responsible for many. But whoever is responsible we want the law to get hold of them. It is hard for the county commissioner to do anything except to get his friends together at election time, while his office is a stepping-stone for something better. It is doubly hard to ask him to prosecute the railroad company if he is riding on a pass, and the county commissioner meets political snares which are unpleasant; but the question is, does the office mean more to him than the forests to us and to our children? I should not think so, if Dr. Rothrock can make unchallenged the statements he does as to the losses by forest fires.

On election night the fire engines passed my house, which is unusual, because I live in a section where there are few alarms, but an old building was set on fire as an election night celebration. The fire department of Philadelphia went to that unoccupied and abandoned building and put out the fire. Had the authorities been able to find the party that set fire to that practically worthless building he would have been put in jail, but that same boy or man can go to any part of Pennsylvania and deliberately set fire to the timber, worth a good deal of money, and cause a reduction in the growth for at least twenty-five years—that man can set fire to the forests, it can spread to hay-stacks, to fences, to barns, it can go for miles and miles, and how many of you know of anybody being jailed in Pennsylvania for setting fire to a forest?

I do hope, as Dr. Rothrock states, that the matter may be put in such hands that if the laws are found to be unjust, they will be made just, and if they are just, that the offenders will be fairly punished.

THE PRESIDENT.—I wish to refer briefly to the question of the influence of forests on rainfall. All investigations, so far as I know, have given only negative My impression is that it has never been shown by scientific methods that forests affect the total precipitation, although they do regulate the run-off. I would like Dr. Rothrock to tell us whether his statements concerning the diminution of rainfall in certain districts are based on actual comparative data.

Dr. Rothrock.—I do not think there are any satisfactory records in this country. I do not think it can be said whether the presence or absence of forests affects the rainfall. In certain portions of Long Island, running back a considerable number of years, it can be shown that the rainfall has increased. There is no question at all as to the fact that they do conserve the water that falls. lowest water-mark we have ever had at Harrisburg I think was during the first three years of the century. A gentleman said to me the other day, "There

mind my visit to Cornell University, in June last, on the occasion of the annual commencement.

On that occasion, Professor B. E. Fernow, late Chief of Forestry Division, Department of Agriculture, at Washington, presented to the audience, with pardonable pride, what he claimed to be the first graduate in forestry ever produced in America. This, he said, was the result of some twenty-five years of hard labor, by which I did not understand him to mean that the entire quarter century had been devoted to the evolution of that one young gentleman, whose age had hardly reached that limit, but that, during that time, the professor had been keeping his weather eye upon forestry education, and devoting much effort to its development.

Dr. Rothrock's recital of the difficulties which he has encountered in bringing the public to a realizing sense of its losses by reason of forestry destruction, strikingly points out the difficulty which a partially enlightened community of partially public-spirited men experiences in protecting itself against the rapacities of the unscrupulous. On the one hand, we have a small body of men desperately interested in looking after their own pockets and quite regardless of the interests of the community, and, on the other hand, a public only half alive to the importance of the depredation which is going on.

It is to be hoped that Dr. Rothrock's efforts for the public welfare may take effect before it is too late to repair the damage worked by the few against the apathetic many.



# CHAINS AND CHAIN GEARING.

#### CHARLES PIEZ.

Read February 2, 1901.


CHAINS have so well established a place in the mechanical world as a meams for transmitting power that it is necessary to say but a few words concerning their scope. They are applicable wherever a positive speed ratio is to be secured, wherever heavy strains at low speeds are to be transmitted, wherever a damp or hot atmosphere would prove destructive to belts or ropes, and wherever power is to be transmitted without sacrificing the flexibility of the shaft supports, as in the case of agricultural machinery.

Just as gears may be roughly classed as cut and cast, so chains can be grouped as machine-made and cast. The former have been almost solely applied to bicycles and motor cars, while the latter are applied to elevating, conveying, and the transmission of power in the mechanical arts. The limitation to the use of machine-made chain is almost wholly a matter of price, and is due very largely to the fact that its manufacture has never been so systematically organized as to produce a well-made chain and sprocket wheel at a reasonable price. Machine-made chains, when properly designed and well made, are stronger, more durable, and less noisy than cast chains of equivalent bearing surface and section. But owing to their lower first cost, the latter have been much more extensively used.

I described machine-made and cast chains as resembling cut and cast gears in their classification; I might carry the simile further by stating that there is as much difference in cast chains as there is between well-made machine-moulded gears and gears cast from carelessly made patterns. That chains shall run properly with their wheels, it is essential that the links shall be accurate as to pitch, that the pintels shall bear uniformly in their seats, that the wheels shall be of the proper pitch diameter, the teeth of proper pitch and shape, and that the bearing and sprocket surface shall be proportionate to the strains to be transmitted. The last requirement is one that can

Accurate workmanship in both chain and wheels is absolutely necessary, and machine-cut wheels must therefore be used.

Several years ago Mr. James M. Dodge designed a sprocket wheel for use with the Ewart or other form of malleable iron chain, in which the wear of the chain is compensated for by its assuming a gradually increasing pitch diameter, as in the case of the Renold silent chain gear. The design, however, is quite different, as will be seen from the illustration (Fig. 12). In a long series of dynamometer tests, wheels of this design, made of chilled cast-iron, have shown them-

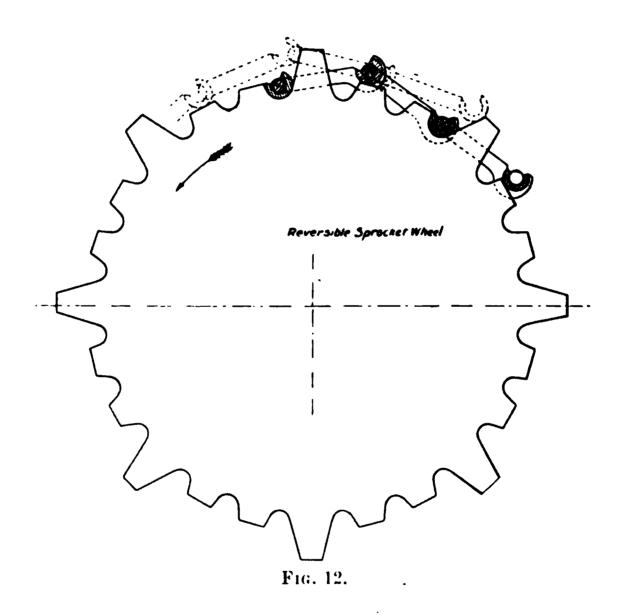

selves indestructible when used as drivers, and have shown that by their use the life of the chain can be practically doubled.

In conclusion, permit me to say that chain gearing, when properly designed and taken care of, is as little subject to derangement as any other power-transmitting medium. Recent developments will no doubt greatly extend the range of application of this form of transmission, and will call for a better understanding of the correct principles that underlie chain gearing by the mechanical world.

by increasing the hardness—the skin hardness—of the material, and not by increasing the bearing surface. The attempts recently, however, have been toward the increase of bearing surface, and that is evidenced by the progress made in the chain. This, for instance, represents the first chain which consists of a series of flats. In this chain, which represents the last type, he has materially increased the bearing surface.

# VARIATIONS AND USES OF THE STANDARDS OF MEASUREMENTS EMPLOYED IN FIELD ENGINEERING.

#### BENJAMIN FRANKLIN.

Read February 16, 1901.

To the inexperienced the art of measuring appears so simple a matter as to require no special knowledge or skill. Indeed, it is doubtful whether even among engineers of high standing there are not some who fail to appreciate the importance of this subject.

A somewhat varied experience has led us to the conclusion that the methods and principles governing practical and accurate measuring can not be too carefully studied by every engineer.

In this discussion the subject naturally divides itself into two heads: first, the differences in standard; second, the mechanical inaccuracies.

The extent of variation referred to in the first of these divisions is a surprise to those members of the profession who are not familiar with municipal work. For instance, the United States foot is not recognized as a standard in the work in any of the survey districts of Philadelphia.

What is known as the Philadelphia standard is an excess of 0.25 foot for each 100 feet in United States measure. But the Philadelphia standard itself, however, is not constant. In one district the allowance is 0.08 inch per 100 feet; in another, 0.13 foot; in another, 0.17 foot; in others, 0.25 foot and 0.27 foot. Sometimes two or more variations occur in a single district, and in one instance which came under our notice an architect calling for a plan, United States standard, found that each side of a quadrangular lot had a standard of its own, none of which corresponded to any of the above figures.

In the further pursuance of this investigation, the writer some time ago entered into correspondence with the engineers of the principal cities of the United States. As far as could be ascertained, with the exception of Boston and New York, Philadelphia practice is followed nowhere else in this country. In Boston the variation ranges from

those of towns, were made with the English standard perch of 5½ yards, with an allowance for broken and forest land. This is supported by the statements of old surveyors, who tell us that the chains of our forefathers were made one inch longer for each two rods of length.

In the instructions given in 1881 to United States deputy surveyors, the designated length of chain for use in township and subdivision surveys is 66.06 feet. The object in adding the 0.06 is to correct for "sag" with a pull of twenty pounds. These chains are tested with a fixed standard each working-day.

In leaving this branch of the subject, the question naturally suggests itself, Is there no remedy for a practice which is certainly unscientific and possibly illegal?

In the consideration of the second division of the subject, the discussion relates only to accuracy in measurement.

It has seemed to the writer that two points ought to be borne in mind by every engineer in his practice: The first is to know when to be accurate; the second is, regardless of the degree of accuracy, to always check results.

The care, nicety, and refinement absolutely essential in measuring base-lines for primary triangulation or city block distances are unnecessary in many kinds of field engineering; but while the relative accuracy of the work may vary, the need for checking is constant.

There are four well-known appliances used in making measurements: First, the rod; second, the chain; third, the steel tape; fourth, the stadia wires.

The rod is so rarely used now in ordinary measurement that we will eliminate it entirely from this discussion.

It is said that the first chain made in accordance with an act of Congress was manufactured by David Rittenhouse, of Philadelphia, in 1797. It was of double links, and was 33 feet long.

The old chain of 66 feet and the later chain of 100 feet have until recently been used almost entirely in making land and railroad surveys; but they are now being generally discarded, and another generation may know them only by tradition. It is necessary to enumerate a few only of their defects.

Thus in a 100-foot chain there are 600 points of contact; according to Professor Johnson, 800. Again, it is estimated that, for a chain

their thought being that to "pull hard and steady" is all that is required for correction. It is not an uncommon sight to see two strong, experienced chainmen, while measuring, engaged in a "tug of war" in an effort to straighten out the tape. The only strain that a suspended steel tape requires is "normal tension"; that is, a pull of sufficient strength to overcome the loss of length due to "sag." This depends upon the cross-section as well as the length of the tape between supports; and for very accurate work, the exact amount must be found for each tape by actual comparison with a standard. This "normal tension" varies from 6 to 16 pounds for a tape 100 feet long. The usual amount for a tape of that length, weighing 12 ounces, is a trifle less than 12 pounds. Practical men, however, recognize that while this tension is sufficient for accurate results obtained under the most favorable conditions, ordinary work requires a pull somewhat stronger in order to allow for those influences which are encountered in an average daily practice. This gives rise to what is known as a "working pull," which ought to range from 18 to 20 pounds per 100 feet, but as actually used is higher than this, frequently 25 or 30 pounds, and on side hill work reaching as high as 40 pounds.

In the work of the Missouri River Commission, on base-line measurements, the tapes used were 300 feet long, with a cross-sectional area of 0.003 square inches. The points of support were 30 feet apart, and the "normal tension" only 16 pounds.

Conditions remaining the same, when the strain in a 100-foot tape is raised from its "normal tension" of 12 pounds to a pull of 20 pounds, its length is increased 0.022 foot. Thorough knowledge of this one point could explain many errors that have been deemed accidental.

In the treatment of temperature we reach the most important influence which affects the variation from standard in a steel tape. This correction is by far the most difficult to make, for the tape is extremely sensitive, and responds to changes of temperature more quickly than the average thermometer. It is affected by almost everything upon which it rests. A grassy meadow, a brick or asphalt pavement, an open road or a shaded pathway, all create changes in its length which even a delicate attached thermometer fails to indicate. Tapes in the sunlight are much warmer than the surrounding atmosphere. On a clear or windy day, or when the air and ground differ in temperature

The limit of error allowed in the measurement of base-lines for primary triangulation is 1 in 1,000,000, affording us the highest standard of accuracy. This standard was reached by Professor Ed. Jæderin, of Stockholm, by tape-line measurements, although he eliminated the temperature error by using simultaneously two tapes of different metals.

In the "American Society Proceedings" for 1893 an instance is given where the degree of accuracy reached is 1 in 759,000. The tape used was 300 feet long; the length of the line, which was the base for a secondary triangulation, was 6663 feet. No measurement was made in the sun.

On the Missouri River Survey, with a length of a base of 9870 feet, with a tape 300 feet long, the greatest degree of accuracy attained was an error of 1 in 533,000. This line was measured at night.

For city work with spring balance and thermometer attachments, a minimum error can be reached of 1 in 40,000. When, however, the sag and temperature are both estimated, the error averages about 1 in 5000.

To one unaccustomed to the use of the stadia, its accuracy is surprising.

In the "Proceedings of the Boston Society of Civil Engineers" for October, 1893, in describing a new prismatic stadia attachment, Mr. Robert H. Richards states that in sights varying from 2000 feet to 3000 feet the error ranges from 0.02 to 0.1 of 1 per cent.

In Europe, with delicately constructed instrument, skilfully handled, spider web attachment, the error averages 1 in 2000.

On the United States Lake Survey for 1875, with lengths of readings varying from 400 feet to 650 feet, the error was from 1 in 1200 to 1 in 1500.

We have found that, with care, a Philadelphia rod will give an accuracy of 1 in 1000, sights not exceeding 600 feet in length. On rapid work, however, the error averages about 1 in 650.

At this date it is difficult to obtain any knowledge concerning the accuracy of the old chain measurements. Burt states that the average error in surveying by chain the public lands of the United States was 1 in 500; frequently the error was 1 in 220, and, under most favorable conditions, 1 in 1600.

On the Northern Pacific preliminary railroad survey the error was 1 in 1000.

### F1a. 1.

between the reduced and actual measurement was about 0.14, but the conditions were not identical and the wind was most too high for a 12-pound pull.

In measuring, the tape was lined up with the transit and leveled with a hand-level. The head chainman ran the spring balance and I set the points myself. All measurements were gone over twice, the old points being destroyed and relocated for the second reading. The difference between the two on the same day and under the same conditions was hardly noticeable.

city measured longer than the United States standard about 3 inches in every 100 feet, and after that, as different sections of the city were laid out, that same standard of measurement was used, I suppose the idea being not to have one portion laid out in one standard and another in another standard. In different parts of the city now the general standard is about 3 inches in 100 feet, and in a good many districts that standard prevails throughout the whole district. I think it does in Mr. Webster's district.

Mr. Webster.—Pretty much.

MR. BLOCH.—Of course, there are at all times factors in a measurement so that you can not establish the accuracy entirely. You probably have to have an allowance of about two-hundredths to the hundred feet. Of course, as Mr. Franklin said, one can not judge the temperature of the tape; and no matter how accurate one may want to get it theoretically, yet no one can get it perfectly accurate practically. The temperature at which the measuring is done can not be obtained. All the work can not be done at night; that would not be a practical way of doing things, so things have to be done in a practical way; and it would not be practical to start using the United States standard in the city of Philadelphia, for the city plans are all made in district standard, and the deeds and lots are supposed to sum up to the block distances as given on the city plans, and if one started to vary any of them, endless confusion would result.

A MEMBER.—Are the standards more uniform than the old?

Mr. Bloch.—Yes, more uniform. I am familiar with the districts using similar standard. Mr. Franklin said in one district it was 0.008. I do not know what district that is.

Mr. Franklin.—The allowances vary from 0.08 of a foot to 0.027 of a foot per 100 feet.

Mr. Webb.—They are all larger.

MR. CLARKE.—It seems to me there is a little misunderstanding about this question of pull. I don't think Mr. Franklin advocated a 12-pound pull for all measurements in all work. I think it ought to be about 20 pounds for rough work, and most work is done with a pull of about that amount.

MR. FRANKLIN.—I think a normal tension of 12 pounds is sufficient with favorable conditions. A reduction ought to be made for the pull of 20 pounds.

Mr. Bloch.—I think a pull of 12 pounds is the proper thing.

Mr. Benjamin Franklin read a paper upon "Variations and Uses of the Standards of Measurements Employed in Field Engineering," and Mr. A. V. Hoyt presented a paper upon "Criticisms on the Art of Land Surveying, as Followed by Civil and Mining Engineers." The general subjects of land measurement and of the relative advantages of theory and practice were discussed by Messrs. Clarke, Bloch, Webb, Brinton, Trautwine, and others.

REGULAR MEETING, March 2, 1901.—The President in the chair. Seventynine members and visitors present.

Mr. F. Lynwood Garrison delivered an address on "Some Notes in China by an American Engineer," in which he described, with the aid of lantern illustrations, some of the observations which he had made during a recent visit to China.

REGULAR MEETING, March 16, 1901.—The President in the chair. Seventy-seven members and visitors present.

Mr. John C. Trautwine, Jr., presented a paper, "The Queen Lane Reservoir, Philadelphia," this being the last of a series of papers on the Queen Lane Division of the Waterworks of Philadelphia which were prepared for the Club by present or former officials of the city's Bureau of Water.

Finance: Messrs. Smith, Levis, Riegner.

Membership: Messrs. Piez, Comfort, Hewitt.

Publication: Messrs. Comfort, Schermerhorn, Piez.

Library: Messrs. Christie, Riegner, Hewitt.

Information: Messrs. Schermerhorn, Christie, Hewitt.

House: Mesers. Levis, Smith, Riegner.

The matter of increasing the salary of the office clerk, which was referred with a favorable recommendation by the out-going Board, was considered, and upon motion the salary of Mr. Fred'k W. Myers was fixed at \$70 per month from January 1, 1901, with the understanding that he will also act as Librarian.

Tellers of Election are as follows: Messrs. Osbourn, Loomis, Devereux, Hubbard, Head, and Bradley.

Auditors for 1901: Messrs. Dallett, Spangler, and Humphrey.

The Treasurer was authorized to deposit \$500 more of the Club's cash balance in the West End Trust Co. at three per cent. interest.

REGULAR MEETING, February 16, 1901.—Present: The President, the Vice-Presidents, Directors Christie, Hewitt, Comfort, Levis, and Riegner, and the Secretary.

The Treasurer's report showed:

Balance, December	: 31, :	1900	),	•	•	•	•	•	•	•	•	•	•	•	•	<b>\$1083.35</b>
January receipts,			•	•	•	•	•	•	•	•	•	•	•	•	•	1832.75
																\$2916.10
January disbursem	ents,		•	•	•	•	•	•	•	•	•	•	•	•	•	421.83
Balance, Jai	iuary	31.	18	901		•	•	•	•	•	•		•	•	•	\$2494.27

The Finance Committee reported the following requests for appropriations from standing committees for the year 1901; and upon motion the amounts were appropriated, one-half to be available before August 1st:

House Committee,	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	<b>\$</b> 3110.00
Publication,	•		•	•	•	•	•	•	•	•		•	•		•		•	1000.00
Library,	•	•	•	•	•	•	•	•		•	•		•	•	•		•	100.00
Information,	•				•	•				•	•			•		•	•	100.00
Salaries,				•	•	•		•			•						•	1140.00
Office Expenses, .																		
																		<b>\$</b> 5900.00

REGULAR MEETING, March 16, 1901.—Present: The President, Vice-President Smith, Directors Christie, Piez, Hewitt, Comfort, Levis, and Riegner, and the Secretary.

The Treasurer's report showed:

Balance, January 31, 1901,	•	•		•	•	•	•		•	•	. \$2494.27
February receipts,	•	•	•	•	•	•	•	•	•	•	. 569.25
											\$3063.52
February disbursements,		•	•	•	•	•	•	•	•	•	•
Balance, February 28th.		_			_	_			_		\$2532.62

## ADDITIONS TO GENERAL LIBRARY.

FROM STATE BOARD OF HEALTH, BOSTON.

Report upon Discharge of Sewage into Boston Harbor, 1900.

FROM COMMISSIONER OF PATENTS, WASHINGTON.

Annual Report, 1899.

FROM CHIEF OF BUREAU OF STEAM ENGINEERING, WASHINGTON. Annual Report, 1900.

FROM WAR DEPARTMENT, WASHINGTON.

Annual Report of Brigadier-General Wm. Ludlow, U.S. Army, July 1, '89 to May 1, 1900.

FROM TREASURY DEPARTMENT, U. S. COAST AND GEODETIC SURVEY.
The Transcontinental Triangulation and the American Arc of the Parallel.

FROM BOSTON TRANSIT COMMISSION.

Sixth Annual Report, August 15, 1900.

FROM UNIVERSITY OF PENNSYLVANIA.

The Provost's Report, August 31, 1900. Catalogue, 1900-'01.

FROM BENJ. SMITH LYMAN, PHILA.

A Geological and Typographical Map of the Shippen and Wetherill Tract, Schuylkill County, Pa., Benj. Smith Lyman and A. D. W. Smith. Also pamphlets on Movements of Ground Water. Notes on Mine Surveying Instruments. Japanese Swords. Importance of Topography in Geological Surveys.

FROM AM. INST. MINING ENGINEERS.

February pamphlets, 1901.

FROM AM. SOCIETY CIVIL ENGINEERS.

Transactions, Vol. XLIV, Dec., 1900.

FROM AM. PHILOSOPHICAL SOCIETY.

Proceedings, Vol. XXXIX, No. 164, Oct.-Dec., 1900.

From U. S. Geological Survey.

Monographs, Vol. XXXIX. Bulletins, 163-176.

From Chief of Engineers, War Department, Washington. Report, 1900, Parts 1-6.

FROM SMITHSONIAN INSTITUTE, WASHINGTON.

Report, 1898.

FROM LIVERPOOL ENGINEERING SOCIETY.

Transactions, Vol. XXI, 26th Session.

FROM THE OSBORN ENGINEERING CO., CLEVELAND, O.

Pamphlet: Abolishment of Grade Crossings, Report of Special Committee, Dec. 18, 1900.

FROM ILLINOIS SOC. ENGINEERS AND SURVEYORS.

Fifteenth Annual Report, 1900.

FROM PATTERSON & WHITE, PHILA.

Club Directory of Philadelphia, 1901.

FROM ENGINEERS' SOCIETY OF WESTERN NEW YORK.

Minutes of Meetings.

FROM EMIL L. NUEBLING, READING, PA.

Electrolysis of Water Mains. Report, Oct., 1900.

FROM U. S. GEOLOGICAL SURVEY.

Topographic Sheets, State of Penna.

FROM ARTHUR D. MARBLE, CITY ENGINEER, LAWRENCE, MASS. Twenty-second Annual Report, 1899.

FROM COLUMBIAN FIELD MUSEUM, CHICAGO, ILL.

Report Series, Vol. I, No. 6, 1899-1900.

FROM GEOLOGICAL SURVEY OF CANADA.

Relief Map of Canada and United States, 1900.

FROM UNIV. OF CALIFORNIA.

Annual Report of Secretary to the Board of Regents, June 30, 1900.

FROM NOVA SCOTIAN INSTITUTE OF SCIENCE.

Proceedings and Transactions, Vol. X, Part 2, 1899-1900.

FROM ENGINEERS' CLUB OF CINCINNATI.

Secretary's Report for Year Ending Dec. 20, 1900. List of Members.

From M. G. Canet, Paris, France.

Discours de President Sortant. Societe des Ingenieurs Civils de France, 1901.

From Theodore A. Leisen, Wilmington, Del.

Report of Board of Park Commissioners, Wilmington, 1900.

FROM AM. SOC. CIVIL ENGINEERS.

List of Members, 1901.

## **PROCEEDINGS**

# THE ENGINEERS' CLUB

OF PHILADELPHIA.

ORGANIZED DECEMBER 17, 1877.

INCORPORATED JUNE 9, 1892.

Note.—The Club, as a body, is not responsible for the statements and opinions advanced in its publications.

Vol. XVIII.

JULY, 1901.

No. 3.

ASTOR, LENOX AND

TILLEN FOUNDATION

## THE PARKER STEAM GENERATOR.

A NEW TYPE OF WATER TUBE BOILER.

HENRY G. MORRIS.

Read April 6, 1901.

In assuming that one has found out something new, it is well to examine into the state of the art before announcing to the world that a new discovery has been made; and with that intention in view, the writer has referred to N. P. Burgh's "Practical Treatise on Boilers," which, up to the time of its publication in 1873, gives drawings of about all the forms of boilers into which iron had been tortured.

In the portion of the work devoted to the water tube type no reference is made to any form in which the water is compelled to flow down-It therefore seems that the form of boiler now presented has some justification for the claim of being a new type.

This is a straight tube boiler with a reversed circulation—that is, the water flows downward as it is heated instead of upward, and the steam is taken off at the bottom and discharged into a dry steam chamber where it is kept separate from the water. Superior economy is claimed for it on account of the flow of the water and the gases being opposite to each other, bringing the coldest gases in contact with the coldest tubes.

The design shown (Figs. 1 and 2) is for a 150 horse-power unit, having 1500 square feet of heating surface and 31.5 square feet of grate. There is a single drum 42 inches in diameter and 20 feet long, divided into

upper and lower chambers, and 96 tubes 3 inches in diameter and 18 feet long. A steel plate or "diaphragm" divides the drum into two compartments. The rear end is fastened to the dished head, and the front end is attached to a casting, or steam space head, which has an opening 11 inches by 15 inches into the lower chamber, controlled by a swinging non-return valve. The valve can be lifted off, and the opening serves as a manhole. A small by-pass connects the steam space of the water chamber with the dry steam chamber.

The tubes are arranged in vertical groups, technically termed "elements," in such a manner as to form a number of flattened coils. The elements in this case are six in number, two tubes wide, and each consists of sixteen tubes expanded into malleable iron junction boxes which form the bends. The front boxes are horizontal, and those at the rear are vertical, the connections being so alternated front and rear that the whole sixteen tubes form one continuous passage for the water and steam from top to bottom.

The boxes have hand holes opposite each tube end, with inside ground jointed covers. The shape of the boxes leaves four openings 1% inches square around each tube for access to the soot and dust. The length of the tubes gives flexibility and the boxes can be separated at any point for the removal of a tube or the baffles.

The upper ends of the elements are connected by short nipples expanded into the vertical junction boxes and into the steel cross box which is riveted to the under side of the drum. A brass disc is suspended in each of these vertical boxes, in front of the nipple, and acts as a check against reversals of the flow. The lowest tube of each element is connected at the front end to a horizontal steel cross box, termed a steam collector, which delivers the combined discharge of all the elements through two upcast pipes to the dry steam chamber. A flanged steel elbow is riveted to each side of the drum just above the diaphragm, and the upcast at each front corner is connected to it by a flanged joint.

The front junction boxes rest on the steam collector, and the whole, including the drum, is suspended at the front end from the cross beams above in the usual way. At the rear end the drum is suspended from the cross beams, but has no connection with the tubes. The rear boxes rest on an angle bar fastened to the columns.

The baffles for directing the course of the gases are placed on the third and eighth rows of tubes; they consist of fire-brick tiles 1½ by 4½ inches by 9 inches, and are easily removed through the front.

The setting and front are of the usual brick and iron construction.

with large doors for access to the boxes both front and rear. The front nozzle is for safety valves, and the rear one is the steam opening. Mud plates or pans are placed at the front end of the water chamber over the openings into the cross box.

The openings between the boxes for access to the soot are shown, both front and rear, in the sectional elevation. A space will be noticed between the check boxes and the horizontal boxes; this is to permit the

separation of the boxes in case of need. The dimensions, including 17-inch walls, are 7 feet 4 inches wide, 18 feet 10 inches long, and 12 feet high from the floor to the top of the drum.

A detail of the check box is shown in section (Fig. 3), illustrating the method of suspending the valve, and utilizing the end of the nipple for a seat. One of the malleable iron junction boxes was tested to 2150 pounds per square inch, and a capped tube was forced out of the hole into which it had been expanded, without any injury to the box. The tubes are not passed through the hand holes, which permits the use of a type of hand hole cover heretofore imprac-

Fig. 3.—Section of Check Box.

ticable. The covers are circular, with conical ground seats, and are passed through the tube holes before the tubes are inserted. The tube holes are bored  $3\frac{1}{32}$  inches, and the hand hole  $2\frac{3}{4}$  inches, which allows sufficient margin for a perfect joint. The covers have guides turned to fit the bored hand holes, and it has been found safe to remove the bolt and spider and turn the cover to stop a leak while under steam pressure. To inspect a tube, the bolt and spider are removed, and the cover is passed toward the other end of the box. A group of malleable iron junction boxes is shown in Fig. 4.

The covers can not be interchanged, which insures the replacement of each upon the seat to which it has been ground. The covers are replaced after inspection without the necessity of cleaning the joints or using a wrench. After pressure is on, a slight turn with the grinding key brings a leaky cover to its seat without danger or waste of time.

the lower tubes to prevent overheating. Any water reaching the steam chamber drains at once into the water chamber.

When there is a sudden withdrawal of steam from the steam chamber the swinging valve closes and prevents priming, and the excess of pressure in the lower chamber serves to maintain the flow in the tubes, which would otherwise be affected by the lifting tendency. The bypass prevents an excessive difference in pressure by allowing a restricted flow of steam from the water chamber to the steam chamber. The tubes can be flushed at will by closing the by-pass and causing a fall in pressure in the steam chamber.

The water carrying the sediment is discharged into the steam chamber, whence it drains into the water chamber as soon as the anti-priming valve reopens. The sediment is invariably found directly beneath the valve, where a connection is provided for blowing it out. A blow-off is also provided from the steam collector.

This boiler can be fired from both ends when floor space is limited or extra grate surface is needed. In a 500 horse-power double-ended unit the drum is 60 inches in diameter and 20 feet long. The elements are single instead of double, the boxes being vertical at both ends. The check boxes are connected to the cross box by a long tube instead of a short nipple. There are two grates, each 6 feet wide by 8 feet long, making 96 square feet of grate surface and 5000 square feet of heating surface on a floor space, including 17-inch walls, 8 feet 10 inches wide by 18 feet 10 inches long.

Where floor space is at a premium, a vertical design is used. The tubes in this case are 2 inches in diameter, and are divided into single vertical elements, each tube being 8 feet long and screwed into the rear bends which have no hand holes. A pair of tubes or a whole element may be removed through the front. There are 24 elements of 24 tubes each; the drum is 72 inches in diameter by 8 feet 6 inches long; there are 48 square feet of grate surface and 2500 square feet of heating surface. The dimensions outside the walls are 8 feet 10 inches wide by 8 feet 6 inches long, or 75 square feet, and the height is 17 feet. This gives  $3\frac{1}{3}$  horse-power to each square foot of floor space. Access is had to every part of this boiler through the front.

A boiler of the two-drum design has been in daily service at Roach's Shipyard at Chester, Pa., since April 11, 1900.

The drawing (Fig. 5) shows that it differs from those described in having separate drums for the water and the dry steam, and independent upcasts for each element at the rear. The lower drum is

suspended in steel framework and supports the upper one on flanged necks. The front neck is merely a saddle with no openings into the drums, and is fastened only to the lower drum to allow for expansion of the drums independently. The rear neck, which forms the drain passage, is of steel, with the opening into the water drum brass-bushed, and is controlled by a conical drop valve. The by-pass connecting the drums at the front end has an offset (not shown) to allow for expansion. The drums are slightly inclined downward toward the rear for drainage and to prevent the sediment from going into the tubes a second time. The sediment settles at the rear end of the water drum, whence it is blown out.

There are eight elements of 3-inch tubes, each having fourteen tubes 18 feet long and one tube 19 feet 6 inches long which connects with the upcast at the rear. The second and fifth rows of tubes are raised to provide access, but this has been found unnecessary. There are three rows of baffles, owing to the flue being at the front. The fire-brick air passages in the combustion chamber did not prove lasting, and were removed.

This boiler works at 100 pounds pressure and supplies four steam hammers, several engines, and also heats some of the shops. It has 1760 square feet of heating surface, 36 square feet of grate surface, and is rated at 175 horse-power. It has been run up to 265 horse-power.

Professor Spangler has made six tests of this boiler under normal working conditions. The equivalent water evaporated per pound of combustible from and at 212° F. was as follows: April 18th, 12.54 pounds; 19th, 11.65 pounds; 20th, 11.70 pounds; 21st, 11.81 pounds; 23d, 12.39 pounds; 24th, 11.05 pounds. The return tubular boiler alongside was tested and the result was 10.97 pounds under the same conditions.

The first annual inspection of the boiler took place on March 31st. The inspection was made by Mr. J. T. Fennell for the Maryland Casualty Company, and a personal inspection was made by Mr. J. M. Lukens, Chief of the Bureau of Boiler Inspection for Philadelphia, accompanied by an assistant. The upper tubes were found perfectly clean, and some thin scale, which appeared to be peeling off, was observed in the bottom row. Mr. Fennell states that the tubes are in the same condition as he found them in his last inspection on December 9, 1900. The scale appears to peel off as fast as it forms, and is carried up and deposited in the drums.

Previous to the erection of this boiler an experimental boiler was built for the purpose of determining the length of coils permissible. It consisted of three 10-inch by 3-foot drums, 160 1-inch by 3-foot tubes, and thirty-six 1½-inch and 1¾-inch fire-box tubes 3 feet long. Two hundred pounds pressure was carried, and superheated steam of various degrees was produced. The length of the coils was varied from 30 feet to 240 feet, with tubes only ¾ inch inside diameter. The results were very instructive.

## ON THE SCIENCE OF STEAM-MAKING.

### JOHN C. PARKER.

#### Read April 6, 1901.

In a historical sketch of the steam-engine by Rankine (p. xix) occurs this passage: "In the history of mechanical art, two modes of progress may be distinguished,—the empirical and the scientific; not the practical and the theoretic, for that distinction is fallacious; all real progress in mechanical art, whether theoretical or not, must be practical. The true distinction is this: that the empirical mode of progress is purely and simply practical; the scientific mode of progress is at once practical and theoretic. . . . Up to the period when Smeaton perfected the atmospheric engine, the progress of the 'fire-engine,' as the steam-engine was then called, had been merely empirical; and in everything that depended on principle, the steam-engine of that period was a most rude, wasteful, and inefficient machine."

The wastefulness of the steam-engine was the prime cause of its scientific development, whereas the boiler presented no such economic problems. The comparatively high economic performance of the boiler under adverse conditions has retarded scientific development, and its progress has been entirely empirical.

To make the steam-engine operative certain well-defined principles must be followed. It is not so with the boiler; any kind of an apparatus, no matter how oddly it may be constructed, will produce steam nearly as efficiently as the most approved design. It has been so easy to make steam that there has been little incentive toward scientific treatment of the problem.

The physical conditions involved in the scientific generation of steam can be graphically shown by a diagram (Fig. 1).

The vertical scale represents temperatures above 0° F., 2500° F. is taken to indicate the initial temperature of combustion, and the curve illustrates the fall in temperature of the gases in their passage to the flue, where they escape at 600° F. The line at 362° F. represents the

boiler temperature due to the pressure (in this case 143 pounds) and the difference in temperature between the boiler and the flue gases is thus 238°.

Since, owing to rigidity of construction, present practice aims to secure equal temperature throughout the boiler, the line at 362° will be straight, and, since there can be no conduction of heat from a lower




FIG. 1. BEAT DIAGRAM.

to a higher temperature, it would be impossible to reduce the temperature of the gases below 362°.

But suppose we are not tied down to a rigid structure, and are free to have the different parts of the apparatus at different temperatures without affecting each other. We will cause the feed water to flow in the opposite direction to the gases. If the feed comes from a heater at 212° F., that end of the evaporation line will be inclined (slightly curved) from the starting-point at 212° F, until 362° is reached, when

it will be horizontal to the point at which superheating begins, where it will again be inclined, but very much more toward the vertical, both on account of the low specific heat of steam and the great difference in temperature.

With the same difference in temperature between the flue gases and the water as before (238°), the flue temperature would be reduced to 450°, which amounts to a saving of 12.4 per cent. If the feed water happened to be at 62°, the flue temperature would be reduced to 300° (with the same difference), which would mean a saving of 23.39 per cent. In this case the temperature of the gases is lower than the temperature of the steam, and this illustrates how heat may be transmitted from a lower to a higher temperature by convection.

It will be observed that superheat could not be added under these conditions at the cool end, but it might be very easily at the other end, with the result of increasing the initial temperature of combustion, and so adding to the economy at both ends.

If the water came in at the hot end of the diagram the rise in temperature would be more rapid, as indicated by the dotted line, but the initial temperature of combustion would be lowered as shown.

It must be evident that to secure the maximum transmission of heat from the gases to the water they must flow in opposite directions, and evaporation must be completed in a single circuit. If any water is recirculated after being raised to the boiling-point, it must necessarily reduce the economy by raising the feed temperature and so reducing its capacity for absorbing the heat of the gases; furthermore, superheating would be impossible and the initial temperature of combustion would be lowered.

It is also plain that, while the transmission of heat is as the square of the difference in temperature, the difference will not be maintained except in proportion to the rapidity of the flow which must be impelled by a constant force.

The diagram demonstrates that the functions of the economizer, the boiler, and the superheater are but separated parts of a single progressive operation which can be more perfectly accomplished in one apparatus.

This is in effect an application of the regenerative process first applied to the air engine about the year 1816 by the Rev. Dr. Stirling, and subsequently improved and modified by Mr. James Stirling, Captain Ericsson, Mr. Siemens, and others. Attempts were made to apply it to steam generating in France by Belleville in 1856, and in

America by Herreshoff about 1878. Mr. Yarrow has made an application of it to his type of boiler quite recently, and he presented an excellent paper on the subject before the British Institute of Naval Architects at the March meeting, 1898.

Belleville and Herreshoff both started on the basis that the flow of the water and gases should be opposite, and evaporation progressively secured in a coil. Both used a pump to maintain the flow, and to that fact their failure may be ascribed.

Belleville assumed that the trouble was due to there being no water in the tubes in direct contact with the flames, and so abandoned his correct principle. He resorted to the common practice of supplying the water to the hot end of the coil, but his troubles were not ended. He made no material progress until he discarded the pump and adopted a gravity circulation. It took him twenty-three years to develop an operative boiler, and that he did so finally, on an incorrect principle, is a remarkable tribute to his personality.

After twenty-two years of use and six years trial in the British navy, which has now about 1,000,000 horse-power, the Belleville boiler has just been condemned by a Parliamentary commission, composed of the most experienced engineers in all Great Britain.

We now have the spectacle of the best engineering talent in the British Empire making a series of exhaustive tests of the *most tried* boilers to take the place of the Belleville.

If we draw any significance from this, it means that twenty years, or any number of years use, will not make a good boiler of a bad one. It means that none of the boilers come up to the requirements, and that there is very little difference between them. It means that, so far as the boiler question is concerned, they are farther at sea than any of their ships, else why should they proceed to test boilers which have been in use a great many years, and the qualities of which are as well known as the Belleville? The fact is that after two centuries of empirical progress we find ourselves at the opening of the twentieth century with the steam generating problem still before us. The "boiler question" has been peculiarly acute during the past decade, particularly in Great Britain, and it would seem as if important results were to be expected, in view of the amount of attention which is being given to the subject.

So far as principle goes, we are making steam to-day by the same process adopted by Hero, of Alexandria, 2000 years ago,—i. c., we boil water in large quantities and draw off the steam from the same chamber

—both very improper practices. We may have stuck some flues through the water chamber to increase the heating surface, or perhaps we have divided up the water space into a mess of tubes, but so far as principle goes, Hero was not one whit behind us in the art of steammaking.

While pressures were low the boiler was reasonably satisfactory; but when the pressure rose above the atmosphere, a new condition was introduced: the pressure was no longer constant and explosions began to be known. As weakness developed it was met at the visible point, and a stay was inserted, a tube beaded over, or a furnace corrugated. Safety became the fundamental idea in boiler design to the exclusion of correct principles, with the result that neither has been attained. The comparative safety of the boiler to-day is more of a tribute to the steel-maker than to the designer.

Only one important conclusion has been reached in the steammaking problem in a century of remarkable scientific progress in other directions. The idea has become almost universal that a free circulation of the water is essential to the safe generation of steam, and that idea is absolutely incorrect.

The primordial condition for the safe generation of steam is a constant flow of the water and steam in one direction. This condition has never been fulfilled. The constancy of the flow is affected in two ways: by forcing the fire until the water is driven in the wrong direction, and by the lifting effect due to falling pressures, which produces a like result.

While the lifting effect due to falling pressures has been well known, the extent of its influence on the motion of the water and steam has never been fully appreciated; in fact, most of the troubles connected with steam-making can be traced directly to this cause.

It is a well-seated belief among engineers that water must be in continual contact with the surfaces exposed to the radiant heat to prevent damage; but how water is to be in continual contact with a square foot of surface which is evaporating enough water to entirely cover it with a layer of steam from  $\frac{1}{8}$  inch to  $\frac{1}{4}$  inch thick once every second has not been explained. Water will not prevent overheating without motion, while steam is most efficient in carrying off the heat if in rapid and constant motion in one direction. Rankine states (p. 261) that the most rapid convection of heat is that which is effected by means of a cloudy vapor, which combines the mobility of a gas with the comparatively greater conducting power of a liquid.

The principal conditions involved in the evolution of a satisfactory steam generating apparatus may be stated as follows:

In a perfect steam generator—

- 1. The water and gases must flow in opposite directions to secure the maximum transmission of heat.
- 2. The flow must be constant and at maximum speed to obtain the highest efficiency of the surface and prevent overheating.
- 3. There must be no circulation of the water; evaporation must be secured in one circuit.

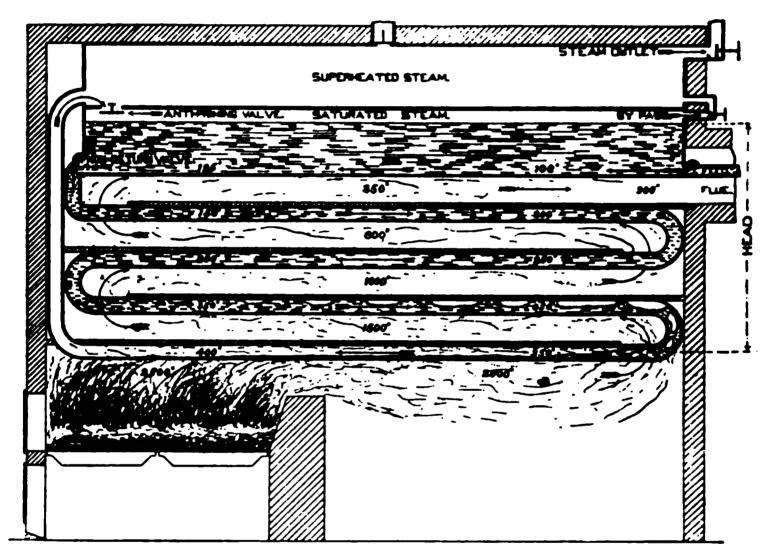


Fig. 2.—Evaporation Diagram.

- 4. The steam must flow directly from the hottest part of the furnace to the steam reservoir without passing through water.
- 5. The steam supply must be separated from the water so that priming, foaming, or lifting will be impossible.
- 6. There must be sufficient steam and water room to prevent excessive fluctuations in pressure and water level.
- 7. The internal surface must be kept clean automatically and the external surface must be perfectly accessible.
- 8. There must be no fluctuations in the temperature of the metal: feed water on hot surfaces must be made impossible.
- 9. There must be perfect flexibility to permit independent expansion of each part.

- 10. The apparatus must be simple, with fewest and best joints, and arranged to permit ready access to every part.
- 11. The apparatus must be absolutely reliable in operation under adverse conditions, with ordinary care.
- 12. The apparatus must be durable, without frequent repairs, and with freedom from leaks.

The essential elements of a steam-making apparatus designed to fulfill the foregoing conditions are shown in the evaporation diagram (Fig. 2).

There is a dry steam chamber, a water chamber beneath it, a tubular passage extending downward from the water chamber, the lower end of which is connected to the dry steam chamber by a direct upcast passage. An opening between the chambers, controlled by a non-return valve, completes the circuit, and equalizes the pressure throughout the apparatus. The valve prevents "lifting" due to falling pressures, and a by-pass from the steam space of the water chamber to the dry steam chamber prevents excessive difference in pressure during such periods. A non-return valve at the induction end of the tubular passage prevents reversal of the flow.

In operation the water is fed into the lower chamber, whence it flows into the tubular passage and seeks its level in the upcast. When heat is applied, the water is soon driven out of the upcast by the expansion of steam. The result is a column of water against a column of steam, with a constant effort on the part of the water to regain its level in the upcast, which is frustrated by continuous evaporation.

It is a common idea that the "buoyancy" of the steam will prevent the downflow in the passage by its tendency to rise and carry the water with it. We know that gravity affects all matter, and that, theoretically, a pound of steam would fall as fast as a pound of water. That a bubble of steam rises to the top of a column of water is only true when the column is supported. The steam and the water can not occupy the same space, and the water, being the heavier, displaces the steam and forces it to the top. A column may be part water and part steam, yet the column, considered as a whole, must obey the law of gravity and will fall unless supported. The laws of hydraulics are as true in a boiler under constant pressure as in a penstock.

The progressive increase in the temperature of the water and the corresponding decrease in the temperature of the gases are indicated by the approximate figures. The bubbles indicate the progress of evaporation, which is completed in the lower tube, and the steam

reaches the upcast in a superheated state. With an ordinary boiler the temperature in the upper tube would be higher than the temperature of the gases in this case.

To secure the maximum gravity head of water would require—

- a. A vertical downcast with only water in it.
- b. A vertical upcast with only steam in it.
- c. Complete evaporation secured in a horizontal tube connecting the lower ends of the two columns.

In the diagram the downcast is cut up into bends to give the required length of flow. The effective head will be the vertical distance from the point in the tubes where the solid column of water becomes broken by evaporation to the water level in the drum.

The rate of flow can be changed in three ways:

- 1. By varying the proportions of the passage and the number of bends.
  - 2. By varying the head of water.
  - 3. By varying the rate of combustion.

The question, then, of keeping the hot end of the tubular passage from getting too hot is merely a question of correct design, since whatever temperature a tube will withstand is no worse for it directly over the fire than near the flue.

The lifting effect upon the water, occasioned by falling pressures, affects the gravity force and acts as an instant check on the circulation or flow in any boiler. This effect is neutralized and the flow in the tubes is maintained during periods of falling pressures by the combined action of the anti-priming valve and by-pass. The valve closes at the beginning of a drop, and the by-pass allows sufficient upflow of steam to prevent excessive difference in pressure between the two chambers. The result is that the flow in the tubes is constant irrespective of changes in pressure. The tubes may be automatically flushed by closing the by-pass and causing a drop in pressure in the steam chamber.

The following points may be noted:

The water and gases flow in opposite directions, which is the ideal condition.

The flow is positive, and is most rapid in the bottom tube owing to the expansion of the water into steam.

The flow is independent of any inclination of the tubes, and is as rapid in a horizontal as in a vertical tube.

The upper tubes are always full of solid water, and there can be no water-hammer action.

Evaporation is accomplished without recirculation of the water.

The steam has a short dry passage to the steam chamber, and there is no ebullition or "boiling" action.

The separate chambers for the steam and the water eliminate the possibility of priming or foaming.

The water chamber is a perfect settling tank, owing to the entire absence of ebullition.

The pressure and the water within the apparatus can be utilized for flushing the tubes automatically.

The temperature of the heating surface is practically non-fluctuating. It is a remarkable fact that, while it has been so often recognized that the water should flow from the flue toward the fire, it has been almost universally assumed to be impracticable, without trial. Rankine states it, and so do Professor Thurston and others.

The practice with "coil" boilers, of which the Belleville is the chief exponent, is to supply the water at the hot end. When the economizers were added to the Belleville by the British Admiralty, the question was discussed of having the flow in the proper direction, but it was decided that it was too dangerous, and the flow was upward as in the boiler.

In conclusion it may be stated that it has been demonstrated by experiment that the same coil will withstand more heat with the water supplied at the cold end than at the hot end, and the reason is not far to seek. In the first case the larger portion of the coil is filled with water and the steam has a free means of escape, whereas in the second case there can be very little water in the coil, and what there is tends to clog the escape of the steam which is mostly generated in the lower tubes and is thus compelled to traverse the entire length of the coil.

# THE DESIGN AND CONSTRUCTION OF FACTORY CHIMNEYS.

#### FRANCIS SCHUMANN.

#### Read April 20, 1901.

From an engineering standpoint a chimney or chimney stalk is a vertical flue or tube of greater or less height, for removing the products of combustion, of smoke from furnaces, for inducing combustion, or for the removal of deleterious gases.

The flow of the heated air and gases is due to their rarefied condition as they pass through the flue, thus constituting a column of air of less specific gravity than that of the ambient atmosphere.

Chimneys are built of either brick, iron, or steel. Only those of brick will be considered in this paper, and they should be constructed to fulfill the following essential conditions:

- 1. The flue must be of proper height and sectional area necessary for a given velocity and volume of air for efficient combustion of the fuel burned in the furnaces.
- 2. Proportion and form of flue should be such as will offer the least amount of resistance to the flow of the gases.
- 3. Maintenance of the temperature of rarefaction by non-conduction through the walls or sides of the flue.
- 4. Provision for the expansion and contraction of the material composing the chimney.
- 5. Stability of the structure or power to safely withstand the external forces, being the combined force of wind and weight of structure.

#### FORM AND DIMENSIONS OF FLUE.

The cross-sectional form of the flue is usually circular, octagonal, or square, the relative efficiency being 100, 97, and 90, in the order named; the area should maintain throughout the height of the flue without reductions or enlargements.

The dimensions are dependent upon the kind and amount of fuel burned, the form and length of the ducts leading to the base of the chimney from steam boiler or other furnaces, and in some cases it becomes necessary to adjust the height to suit local conditions, such as adjacent high ground or buildings, or for the purpose of emitting deleterious gases at higher altitudes.

Peclet was the first to exhaustively investigate and publish a theory concerning chimney draft. Subsequently Rankine's treatment of the subject in a more amplified form became known, and his method and formulæ are those generally accepted.

The application of these theoretical formulæ to practice is, however, associated with the difficulty that they require exact data regarding the elements of friction and temperature, values which greatly vary with the form of furnace, grate, boiler, ramifications of ducts and flues, and other passages for air or gases, as also the kind of fuel and method of firing. These difficulties, beside the rather complicated nature of the purely theoretical, have induced engineers to create empirical formulæ which give values agreeing with those of chimneys in actual satisfactory operation.

An engineer designing a chimney must and does have full knowledge of one essential; this is the power to be developed, and, consequently, the amount of fuel to be burned. With these data and statistics regarding the behavior of chimneys in actual operation he is enabled to construct simple and reliable empirical formulæ for his guidance. In the preparation or use of such formulæ care must be observed to make due allowance for any conditions of moment varying from those upon which the formulæ are based.

It has been found that the far greater number of chimneys are subject to average conditions, and hence favorable to the use of empirical formulæ. Some of the exceptions to these average conditions are when furnaces are distant from the base of the chimney, when they are elevated and ducts lead downward to the base, when the ducts are restricted in area, or pass through damp or wet media, or when the chimney is surrounded by high buildings or near cliffs.

The following formulæ are presented by the writer as new and giving values agreeing very closely with those confirmed by actual and satisfactory results. The only claim that can be made in their favor over other existing similar formulæ is their greater simplicity.

# FLUE PROPORTIONS.

# Reference.

K = total amount of coal burned per hour in pounds.

H =height of chimney in feet.

A = sectional area of flue in square feet.

The proper sectional area for a given amount of coal burned per hour should be:

$$A = \frac{650 K}{36000 \sqrt[4]{\frac{650 K}{36000}}};$$

in which 650 is the smoke produced, in cubic feet per hour per pound of coal, and 36000 a velocity in feet per hour, or 10 feet per second, the velocity increasing with the amount of fuel burned per hour.

The area thus found may be altered to suit different heights of chimneys, but should not exceed 10 per cent. either way when used in the following formula for obtaining the height:

$$H = \frac{250 \text{ K}}{500 \text{ A} - \text{K}}; K = \frac{500 \text{ A}}{H + 250}; A = \frac{H \text{ K} + 250 \text{ K}}{500 \text{ H}}.$$

The proportions resulting from these formulæ apply to circular flues, and are ample for any kind of coal, whether anthracite, coarse or fine, or bituminous.

When the flue is octagonal or square, the height H, as found above for given values of A and K, is to be increased  $\frac{100}{97}$  and  $\frac{100}{90}$  respectively.

The best economy in the furnaces is attained when the temperature of the gases at the base of the flue is between 550° and 600° F.

The amount of coal consumed per horse-power per hour is between 2.5 and 5 pounds, and burned at the rate of from 10 to 30 pounds per square foot of grate surface.

### Construction.

The outer form of brick chimneys is either circular, octagonal, or square in plan, and pyramidal in elevation, the sides having a regular taper of about \(\frac{3}{8}\) inch per foot; the diameter at the base, the inscribed circle of octagon or square, being between one-tenth and one-eighth of the height, the proportion being dependent upon the required stability and ratio of flue area to height.

The shell which encloses the non-conducting inner lining should be of good hard-burned brick, of uniform size, laid in cement mortar. To insure circular bondage stretchers should preponderate, say four courses of stretchers to one of headers. It is good practice to bind the shell by iron bands or hoops made of, say, ‡ inch by 4 inch bars, securely riveted at joints. These should be built in with the brickwork about 8 feet apart throughout the height of the chimney. The bands are made in sizes to allow the laying of one course of stretchers

between the band and the outer surface of the shell, the space between band and inner course of bricks being well filled and packed with mortar. The bands should be so placed as to come immediately above or below a header course.

Care must be exercised to secure thorough packing of the joints in the brickwork with mortar, so that the chimney walls be as impermeable as possible to the inflow of external air which would tend to lower the temperature in the flue.

The inner or flue lining should extend the full height of the chimney, and in no case bond with the outer shell, except at the duct inlets at the base. An annular space of not less than one inch should separate the lining from the outer shell. The lining, which is usually one-half brick thick at the top, increasing by half bricks in sections, is held in position vertically by projecting corbels of outer shell just touching the outer surface of the lining, thus permitting the free movement due to expansion.

The lower third of the lining should be faced with fire brick, laid in fire clay, to resist the higher temperature of the gases; the upper portion may be of ordinary brick. It is important to avoid sharp corners where the ducts enter the flue; the larger the curve, the better.

The top of a chimney should be covered by a cast-iron cap, serving as a binder, or tie, for the upper courses of the brickwork, also as a cover, or protector, of the shell, space, and lining, from the weather, and as a deflector of the wind by inclining the upper surface at an angle of about 30° down and outward. The cap should be so arranged that it rests upon and is secured to the outer shell only. The upper surface of the cap projects over the inside of the inner lining, from which point a flange or apron extends down several inches below the top of lining, care being taken to leave a clear space of, say not less than 6 inches between the top of lining and under side of cap to permit unobstructed longitudinal movement from expansion.

Protection from lightning is very essential in tall chimneys; a good method is the use of a heavy copper band placed several inches below the bottom of the cast-iron cap, where it is secured to the brickwork by copper bolts to prevent its sliding downward. To this band, copper rods, pointed and gilded, are soldered and riveted; the rods are placed at intervals not exceeding 2 feet, and of a length to bring the points about 2 feet above the highest part of the cast-iron cap, the rods being bent outward so as not to touch the edge of the cap. Conductors made of about  $\frac{1}{8}$  inch by 1 inch copper strips lead from the

band to a copper plate about 3 feet square by  $\frac{1}{16}$  inch thick buried in the ground near the base of the chimney, at least as deep as the bottom of the foundation, and where dampness exists, or, better still, in any adjacent deep well or body of water. All joints should be riveted and soldered, and expansion provided for by slightly corrugating the conductor at intervals, being careful to avoid sudden bends. No insulation should be used.

## STABILITY.

The stability of a brick chimney depends upon the strength of the material of which it is constructed to safely resist the stresses from the external forces, being the lateral force of wind and the superimposed mass, acting as a resultant at any horizontal plane throughout the height, or at the base of the structure.

The proportions must be such that the axis of rotation, or neutral axis of the resultant force, never falls within the respective cross-section, thus insuring compressive stresses of uniformly varying intensity only, tensile stresses not being permissible in masonry structures.

The non-conducting inner lining of the flue, being separate from the outer shell, does not add its mass toward the stability of the chimney, but only to that of the foundation upon which it rests.

The force of wind which a chimney should safely resist ought not to be taken at less than 50 pounds per square foot on a plane surface; its direction can be assumed to act horizontally without sensible error. The assumed force of 50 pounds is by no means excessive when considering the height and flexible nature of a tall chimney with a tendency to accelerate and gain in momentum, in direction with the wind storm, especially when it acts in gusts of great force and in unison with the vibration of the structure.

# PROCEDURE IN DESIGN.

After having decided upon the dimensions of the flue, find the outside dimensions at the top by adding to the flue diameter the thickness of the lining, the space between lining and shell, and the thickness of the outer shell, at the top; the lining thickness need not exceed one-half brick, or 4 inches; the space, say 1 inch, and the shell, one brick, or 8½ inches.

From these outer dimensions lay out the side lines of the shell with a batter of say { inch per foot down to the base of the chimney; sub-

divide the height into zones corresponding with the various thicknesses of the shell, resulting from the addition of brick dimensions, being respectively 4", 8½", 12½", 15", 21", 25", and so on, each zone being of equal thickness throughout its height.

Determine the stability of each joint, commencing at the top; if deficient, add to the mass by increasing the thickness of the walls, or by increasing the outside diameter.

# PRESSURE OF WIND.

The maximum force of the wind which the structure should withstand with safety is:

For square chimneys, 50 pounds per square foot of elevation.

For octagonal and round chimneys, 25 pounds per square foot of diametrical plane.

# WEIGHT OF MASONRY PER CUBIC FOOT.

Hard-burned brick in cement mortar,	•		•	•	•	. 115 to	o 120 lbs.
Fire brick in fire clay mortar,	•		•		•	•	137 lbs.
Concrete, average		•					125 lbs.

The following table gives the results of tests made at the Watertown Arsenal in August, 1882, upon varieties of Philadelphia machine-made hard brick, and brickwork made of the same kind of brick, built into cubes 1½ bricks square and 5 courses thick:

In Pounds per Square Inch.			
First			
•	3012 to 5000	5540 to 11,720	
•	4053	8114	
Cours	es High.—		
•	499 to 1070	799 to 1914	
•	726	1375	
•	627 to 2070	1654 to 2685	
•	1371	2141	
	In Tons per Square Foot.		
•	217 to 360	399 to 844	
•	292	584	
•	36 to 77	57 to 138	
•	<b>52</b>	99	
•	45 to 149	119 to 193	
•	99	154	
	Cours	First Indication of Fracture.  3012 to 5000  4053  Courses High.—  499 to 1070  726  627 to 2070  1371  In Tons per 8  217 to 360  292  36 to 77  52  45 to 149	

For hard brick laid in cement mortar, 14 tons per square foot can be

considered a safe load, this being slightly less than one-sixth of the average load which caused first indications of failure, and less than one-eighth that of the lowest record for ultimate resistance.

# FOUNDATION.

The safe loads which the earth underlying the foundations can sustain vary between 1 and 12½ tons per square foot, the amount depending upon the character of the soil.

The weakest and most unreliable soil is blue clay, and the strongest is a hard, dry, red clay mixed with coarse sand and gravel, requiring the pick to loosen, such as prevails here in Philadelphia, which, to the writer's knowledge, is sustaining loads exceeding 12 tons without causing any appreciable settlement.

Such extraordinary bearing qualities as the last mentioned are unusual, and the general practice is not to exceed

- 5 tons on hard sand and gravel,
- 4 tons on fine sand, loam, and gravel,
- 3 tons on coarse sand mixed with clay,
- 1 to 2 tons on blue clay mixed with sand and a little loam, the sustaining power varying with the amount of moisture.

Earth of a plastic nature requires piling, or special treatment, varying with the conditions.

When the periodical rise and fall of adjacent bodies of water penetrate to the foundation, those earths which are composed of clay or admixture of clay and sand, and especially blue clay, become extremely doubtful and unreliable, and point to the necessity of piling.

# FORMULE FOR STABILITY—GENERAL PRINCIPLES.

- I. When a structure such as a chimney is under a compressive vertical force (mass) only, the neutral axis or axis of rotation of a sectional plane or joint, will be at infinite distance from the center of gravity of the plane; the resultant force will pass through the center of gravity of the plane, which will be subject to compressive stresses of uniform intensity throughout.
- II. When the structure is subject to a lateral force (wind) in addition to the vertical force, the resultant will intersect the sectional plane at a point beyond the center of gravity of the cross-section with the direction of the lateral force. The neutral axis or axis of rotation will approach the center of gravity of the cross-section from the side of the lateral force.

- III. The position of the axis of rotation in a plane is independent of the amount of the external forces, but dependent solely upon the location of the resultant of the external force (mass and wind).
- IV. When the axis of rotation passes through the cross-section, one side of the section, the windward, will be in tension, and the other, the lee, in compression.
- V. When the axis of rotation passes by the section, the stresses are wholly compressive and uniformly varying in intensity, as should be the case in masonry structures in which tensile stresses are not permissible.
- VI. The resultant external force in masonry structures should never fall outside of the core of resistance of the cross-section.

The quotient of any moment of inertia of a cross-section, in relation to the neutral axis passing through its center of gravity, divided by the distance of the edge of the section from the neutral axis, times the area of the section, is the distance from the neutral axis to a point in the bounds of the core of resistance.

In a circular or circle ring plane the core of resistance is bounded by a In a square or hollow square it is a square with its diagonal perpendicular to a side of the plane.

- VII. When the resultant of the external forces falls outside the core of resistance, the axis of rotation will pass through the cross-section.
- VIII. When it falls within the core, the axis of rotation will pass by the cross-section.
- IX. When it intersects the edge of the core, the axis of rotation will be at the edge of the cross-section, resulting in null stress at the axis of rotation, or the edge through which it passes, and double the normal stress at the farthest edge.

### FORMULE FOR STABILITY.

Let Fig. 1 represent a symmetrical pyramidal prism of a given mass or weight subjected to a lateral force W, j j being a joint or sectional plane.

Let m = mass or weight of prism above joint j,

A =area of its diametrical plane or projection, and

b and  $b_1$  = width at base and top, respectively;

G =center of gravity,

W =total lateral force acting at G, and

h = distance from joint to G, or lever arm for W.

# 164 Schumann-Design and Construction of Factory Chimneys.

x = distance from center of gravity of cross-section to intersection of resultant R (of mass and wind).

w = pressure of wind per square foot, 50 pounds for plane surface and 25 pounds for cylindrical or octagonal.

 $w_1$  = pressure per square foot a given cross-section will resist when the axis of rotation is at the edge of the section.

$$W = w A; \quad h = \frac{b+2}{b+b_1} \frac{b_1}{8}; \quad x = \frac{Wh}{m}; \quad w = \frac{Xm}{Ah}; \quad w_1 = \frac{km}{Ah}.$$

m and x being known, the next step is the determination of the resulting stresses, and their character, acting at the joint.

Fig. 2 shows a joint j j and its sectional plan, a solid square being chosen, with its core of resistance cross-lined. Three diagrams are also shown giving graphically the stresses throughout the cross-section for different positions of the axis of rotation.

Let a =area of section, and

g =center of gravity,

I = moment of inertia,

 $r^2$  = radius of gyration square,

k = distance from g to core of resistance,

n-n = neutral axis of cross-section through g,

O =axis of rotation,

s = distance from n n to edge of section, lee side,

 $s_1 = \text{distance from } n \text{ n to edge of section, windward side,}$ 

 $y = \operatorname{distance} \operatorname{from} n n \text{ to axis of rotation } O$ ,

d == distance from axis of rotation to any point where stress
is sought,

 $d_1$  and  $d_2 =$  distance from axis of rotation to respective edges,  $e_1$  and  $e_2$ ,

p = stress per unit of area at any point distance d from O,

 $p_1$  and  $p_2$  = maximum and minimum stresses respectively at edge  $c_1$  and  $c_2$ .

(I) When  $x \le k$ , axis of rotation falls outside of section;  $p_1$  and  $p_2$  compressive stresses.

(II) When x = k,  $y = s_2$ ,  $d_2$  and  $p_2$  become null, and  $p_1 = \frac{2m}{a}$ .

(III) When  $x \le k$ , axis of rotation falls within the section;  $p_1$  compressive and  $p_2$  tensile stress.

$$r^2 = \frac{I}{a}; \ k = \frac{I}{sa}; \ y = \frac{r^2}{I}; \ p = \frac{mx}{I}; \ d = \frac{md}{ay}; \ p_1 = \frac{m}{a} + \frac{Wh}{I}s_1; \ p_2 = \frac{m}{a} - \frac{Wh}{I}s_2.$$

When  $\frac{m}{a} < \frac{Wh}{I} s_2$ , the stress is opposite in kind or tensile.

F1G. 3.

III F1G. 2.

# 166 Schumann-Design and Construction of Factory Chimneys.

VOLUME OF SOLID AND HOLLOW FRUSTUMS.

D and d = diameter of base and top, respectively, also inscribed circle of square and octagon.

h = height.

t =thickness, uniform throughout,

V = volume.

# FRUSTUM.

Solid conic, ... 
$$V = 0.7854 \begin{bmatrix} \frac{h}{3} & (D-d)^2 + D & d & h \end{bmatrix} = \frac{\pi h}{3} \left( \frac{D+D & d+d^2}{4} \right);$$
Hollow conic, ...  $V = \left( \frac{D-d}{2} - t \right) \pi h t;$ 
Solid square pyramidal, ...  $V = \frac{h}{3} & (D-d)^2 + D & d & h;$ 
Hollow square pyramidal, ...  $V = h & \left( \frac{4(D-d)}{2} - 4 & t \right);$ 
Solid octagonal pyramidal, ...  $V = 0.8284 & \left( \frac{h}{3} & (D-d)^2 + D & d & h \right);$ 
Hollow octagonal pyramidal, ...  $V = 0.8284 & \left[ h & \left( \frac{4D+d}{2} - 4 & t \right) & \right].$ 

#### FORMULE RELATING TO THE CROSS-SECTION.

Form of Section.	Area a.	Moment of Inertia I.	Core Distance $k = \frac{I}{sc}$ .
Solid square,	$D^2$	<i>D</i> 4	<u>D</u>
Hollow square,	$D^2-d^2$	$\frac{D^4-d^4}{12}$	$1 D^2 + d^2$
Solid octagon, Hollow octagon, .		$0.0547 D^4 = 0.0547 (D^4 - d^4)$	$\begin{array}{c} 6 & D \\ 0.132 & D \\ 0.132 & \frac{D^2 + d^2}{D} \end{array}$
Circle plane, Circle ring,	$0.7854 \ D^2$ $0.7854 \ (D^2 - d^2)$	$\int_{-64}^{\pi} D^4 = 0.0491 \text{ D}^4$ $\int_{-64}^{\pi} (D^4 - d^4)$	2

The neutral axis passes through the center of gravity of the section parallel to sides of square and octagon. D and d are the outer and inner diameters, respectively, of circle rings, inscribed circles of octagon, or length of side of square.

# EXAMPLE OF A CHIMNEY.

In conclusion, an example (Plate I) is given of a round chimney with circular flue, 4 feet in diameter, and 100 feet high, in which no tensile stresses shall exist when the wind exerts a pressure of 50 pounds per square foot on a plane surface. The earth underlying the concrete foundation shall not be subjected to more than 2 tons per square foot as a maximum pressure.

rgs of The Engineer	8' Club of P			
70.0"		5.875°	-8/4" DIK 1-5 W.	6.3:

TABLE I.—SUMN

Diameter at Joint in Feet.

aniol bus acistrici

It will be noted that that of least stability; werestability would still be such


. 18′×18′

29.08 29.08 55.48 103.68 203.48 256.48 62.20 121.50 440.18

11, 111, 1V, V, VI, Shell, Lining, Concrete,

6.875 7.812 8.750 10.000 11.875 12.500

# FLUE HIGH, WITH EXAMPLE OF CHIMNEY 100 PEET FERT IN DIAMETER. TABLE L-SUMMARY OF RESULTS.

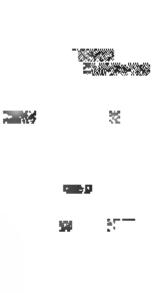

It will be noted that the axis of rotation falls outside the section in every case, hence compressive stresses only. Joint V is that of least stability; were the axis of rotation just touching the edge of section, resulting in null pressure at this point, the stability would still be such that it would sustain a wind pressure per square foot on a plane surface of

$$w_1 = \frac{k \text{ m}}{A \text{ k}} 2 \times 2000 = \frac{2.1 \times 203.48}{815.8 \times 40.35} 4000 = 51.94 \text{ pounds}.$$

The weight of section I includes the weight of the cast-iron cap of 4 tons.

To fulfill these requirements it was necessary to proportion the base with a diameter equal to one-eighth the height, or 12 feet 6 inches, resting on a concrete foundation 18 feet square by 6 feet thick. The top of the chimney has a diameter of 6 feet 3 inches, making the batter  $\frac{3}{8}$  inch per foot of height.

The arch of the inlet duct is of the same radius as the flue—2 feet—being in fact a continuation of the flue curve in the form of a bend until it forms the roof of the inlet duct as an arch.

Attention is called to the square base, or plinth; this form became necessary to obtain stability at the point where the inlet ducts greatly reduce the effective sectional area, where the shell continued down to top of concrete as a conic frustum.

The chimney was proportioned for a capacity of 360 horse-power, allowing 5 pounds of coal per horse-power, which makes a total of 1800 pounds per hour. With this as a basis, the area of flue was

$$A = \frac{650 K}{36000 \sqrt[4]{\frac{650 K}{36000}}} = \frac{1170000}{36000 \times 2.38} = 13.65 \text{ or a diameter} = \sqrt{\frac{13.65}{0.7854}} = 4.17,$$

for which four feet was adopted, or 12.56 square feet area.

The height became:

$$H = \frac{250 \ K}{500 \ A - K} = \frac{250 \times 1800}{500 \times 12.56 - 1800} = \frac{450000}{4580} = 102.8$$

for which 100 feet was adopted. The slight reduction in dimensions, made for the sake of rounding off, has no appreciable effect in view of the liberal allowance of 5 pounds per horse-power.

The height h for division VI, of 39.7 feet, is the distance from the base, or joint of the division, to the common center of gravity of the wind force of the round and square portions of the chimney, the pressure per square foot being respectively 25 and 50 pounds of projected area.

The total pressure against the round part is 10.19 tons, with a lever arm of 40.35 + 10 = 50.35 feet.

That of the square part is  $=\frac{12.5 \times 10 \times 50}{2000} = 3.125$  tons, with a level arm of 5 feet, hence,  $39.7 = \frac{10.19 \times 50.35 + 3.125 \times 5}{10.19 + 3.125}$ .

Table I gives summary of results for the chimney under consideration.

The permissibility of tensile stresses in masonry structures is sometimes advocated,—in fact the building laws of certain European States

permit as high as  $2\frac{1}{2}$  tons per square foot in brick chimneys built with sement mortar. All experience and sound reasoning, however, is to the contrary. Brickwork lacks all of the physical properties conceded to be requisite in a material suitable to withstand alternating compressive and tensile stresses. The failure or destruction of high chimneys by wind storms has invariably been due to the opening of the joints on the windward side from lack of weight or width of base. A chimney or tower designed and proportioned for an allowance of tensile stresses is capable of resisting only a lower wind pressure than that assumed, and thus its power to safely withstand the force is so much less.

#### DISCUSSION.

THE PRESIDENT.—Is Mr. Sweeney present?

Mr. Frank Sweeney.—Gentlemen: This is a surprise to me, to be called on to-night to address an assembly of this kind. My business is brick-laying, and I have built a good many high chimneys of different shapes. I am not prepared to make an address to-night, but I would simply like to call your attention to a case I have run against in connection with the twin chimneys that I built for the power-house of the Union Traction Company, at Delaware Avenue and Fairmount.

This whole building, including the stacks, was built on pile foundation, on which was placed concrete—I think, to a thickness of three or four feet. was a stone base above the pavement line, probably seven feet high. cornice of terra cotta. The stack is 160 feet high, and about 110 feet above the terra cotta cornice. I noticed, a year or so after these stacks were built, that the terra cotta cornice was breaking. The stacks started to give way from the wall of the building. It is a two-story building. I think at the present time they have left the building by 1½ inches away from its former position. The north stack is two inches away, and apparently still going. I think they have opened up a space half an inch greater than they were a year ago. There is a very slight evidence of cracking, in the stone base, on either side. The piles appear to have settled down. The resistance, or help given to each stack, by the wall of the building, has apparently held them up to a certain extent, and let them go down on the outside. the top, one stack must be over four and a half inches further south than when we built it, and the other stack is over six inches further north than originally built, and is apparently still going. The brick-work has opened up between the windows, and it looks to me to be a job for somebody to rebuild, some time in the future.

Figure 1 shows the building of the Union Traction Company. The bases of the stacks are shown on the right and left of the building. The stacks (not shown in the figure), as already stated, run up about 110 feet above these bases. Settling cracks can be seen extending upward from the right-hand window in the second story, as also the breaks between the building proper and the bases of the stacks.

EDGAR MARBURG.—How far was the concrete foundation carried beyond the outer foundation of the stack?

weight, unless great care be exercised in proportioning the foundation so that the pressure per unit of area on soil be alike. In this case the pressure from the chimney was much greater than that of the comparatively light connecting wall, and the result,—the leaning apart of the chimneys and separation from the joining wall,—as stated by Mr. Sweeney, could have been foreseen.

Mr. Sweeney.—I failed to state before that the front wall of the building was built into a slot left in the stack wall. That slot was four inches into the stack and twenty-two inches wide.

MR. SCHUMANN.—The foundations ran through?

Mr. Sweeney.—Yes; the slot was not started until the top of the stone base was reached, which was about seven feet above ground-level.

A VISITOR.—I should like to ask Mr. Sweeney if he noticed any cracks in the north and south walls of the chimneys.

Mr. Sweeney.—I did n't go into the yard north or south to look at the returns. I did n't look for cracks in the sides, but simply noticed them on the street front. I imagine there would be nearly as much on the sides as showed in the front, because the terra cotta cornice appears not only to have gone north and south, but east as well. It appears to be separated about two inches toward the north and south, and one inch to the east, showing that there must be a crack on the opposite side of the chimney.

Prof. Rondinella.—It might be interesting if we could hear some impartial testimony as to the economy in using artificial draft in place of high chimneys.

MR. CHRISTIE.—Mr. Snell can probably tell us something about that. Is he here?

HENRY I. SNELL.—I do not know that I have much to say to-night. There are some points brought out in the papers before the Club this evening which I would like to make use of in a comparison of some of the advantages of mechanical over chimney draft.

In the first paper, the author states that one of the chimneys, shown and described to the members, was designed for a boiler plant of two thousand H. P., and that it cost \$12,250, or about six dollars per H. P. A mechanical draft apparatus complete and installed ready for use, including fan, engine, and air-distributing pipe for plants of this magnitude, will cost, on an average, about one dollar per H. P. The advantage of mechanical draft over natural draft by this illustration is \$5.00 per H. P., or \$10,000 for a 2000 H. P. plant.

In Mr. Schumann's able paper on the theory of natural draft as applied to a chimney for steam boilers, I notice he makes use in one of his formulæ of the figure 650 as representing the volume of air in cubic feet required for the combustion of one pound of carbon or pure coal. I assume that this figure represents the volume when expanded by a temperature of about 550° or 600° F.; in other words, 650 cubic feet of escaping gas must be provided for each pound of coal, of good quality, consumed on the grate.

With natural draft it is considered good practice to allow 300 cubic feet of air of the outside temperature for each pound of coal consumed in the furnace, and this volume expands to twice the amount when heated to 550° to 600°. Considering the variation in the quality of coals, and the losses and wastes in combustion, it may be considered good practice, and I believe a usual one, to allow four pounds of coal per hour per H. P. From these figures it is possible to make some calculations by which we can compare the relative merits of natural and mechant

# NOTES ON THE CONSTRUCTION OF A FACTORY CHIMNEY.

#### I. WENDELL HUBBARD.

Read April 20, 1901.


The factory chimney is becoming so much a part of our landscape that these notes, although recording no serious difficulties encountered, may have sufficient bearing on chimney construction generally to commend themselves to your attention.


In July of 1900, in connection with the construction of a manufacturing plant for Mellor & Rittenhouse Co., at Camden, New Jersey, the erection of the chimney from which these notes were made was begun. The chimney is located 225 feet from the Delaware River, and is 218 feet in height from the bottom of foundation to top. (For details of the structure see Plate II.)

The first step, naturally, was the excavation for the foundation. Having had occasion a week or so earlier to drive a well within 30 feet of the proposed location of the chimney, we obtained from borings excellent data as to the materials most likely to be encountered in the digging of our foundation.

The size of the pit excavated was 34 feet 3 inches square. The surface of the ground was about  $\pm 10$  or 10 feet above mean low water in the Delaware River. To a depth of 3 or 4 feet below the surface the material excavated was a heavy ballast deposited at former times from vessels. Below this was found a sand and loam, which, when wet, would run like quicksand, necessitating the driving of close sheet piling. This sheet piling was 3 > 12 inch plank 18 feet long, driven around a framing of 10 < 10 yellow pine timber. At a depth of 3 feet above mean low water, or  $\pm 3$ , water was encountered, although not enough to cause any serious trouble. By keeping two pumps running we managed to keep the pit practically free from water. At a depth of 16 feet below the surface, or  $\pm 6$ , the gravel bottom was reached, coinciding with our observations from well boring.

From this level the foundation was started, using a concrete of one part Portland cement, two parts sand, and five parts of broken stone.

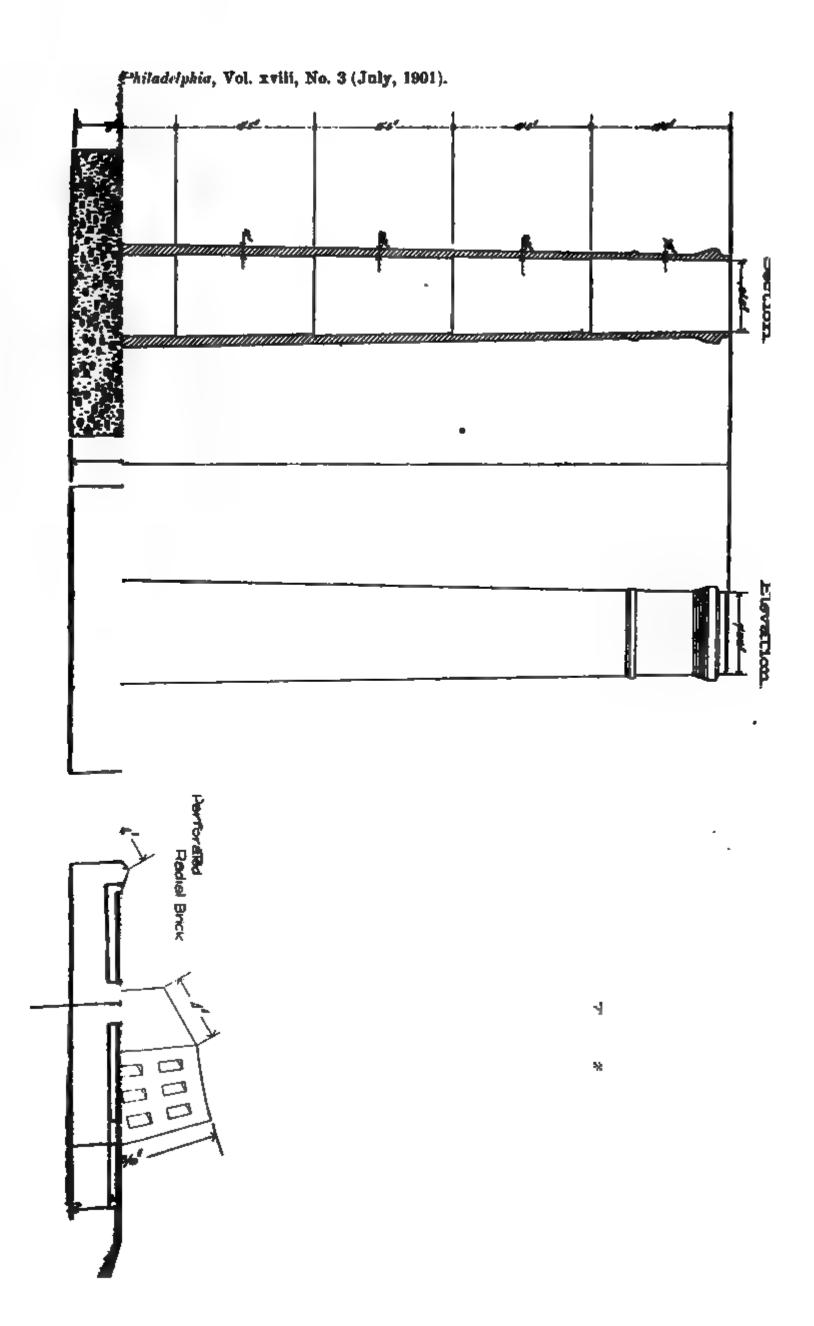

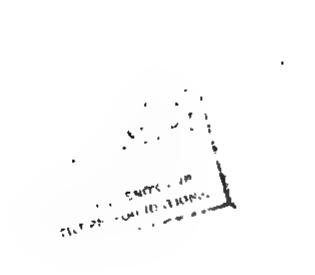

The concrete was mixed dry, with the exception of wetting the broken stone, there being sufficient water in the pit to give the proper consistency. This was mixed above and lowered in buckets carrying one yard each. The concrete was carried up to a level of +1, or 1 foot above mean low water, being thoroughly tamped as the work progressed, and forming a mass 7 feet in thickness and 34 feet square, weighing approximately 526 tons. The concrete was allowed to set for a week before the brickwork was started.

Common red bricks manufactured by the Sayre & Fisher Co. were used in the construction of the base above the concrete, and were laid in Portland cement and sand. This brick base was 28 feet 6 inches square. The chimney was laid out immediately on top of the concrete footing with an internal diameter of 10 feet 8 inches, and was pierced on the south side by an opening for an underground flue 5 feet 10 inches wide and 5 feet to the springing line of a semicircular arch which was put in with four rowlock courses. This brick base diminished in size from the outside by successive steps of 12 inches, the first step occurring at a height of 1 foot above the concrete, and the succeeding steps at intervals of 2 feet each, which continued until floor level, or  $\pm 12$ , was reached, at which point the foundation was reduced to 18 feet 6 inches square.

The weight of the brickwork between the concrete and the floor level is approximately 360 tons. Above the floor level, to a height of 22 feet, the Sayre & Fisher red bricks, laid in lime and cement mortar, were used; the thickness of the first level of brickwork being 40 inches, at its least dimension, the stack at this level having an internal diameter of 11 feet, this diameter continuing up to 22 feet above the floor level, where it increases to 11 feet 9½ inches. The same wall dimensions continue up to the underside of the upper flue, which is 4 feet above the floor level, or +16. The height of the opening for the upper flue is 10 feet to the springing line of arch, the latter having a radius of 2 feet 6 inches, the thickness of the arch being 16 inches. The thickness of the wall above this bottom of flue is 36 inches at its least dimension. With the exception of the corbeling out, this same thickness continues up to the beginning of the radial brickwork.

Twenty-two feet above the floor level the exterior of the chimney takes its circular form. The bricks used in this portion were the perforated radial bricks manufactured by the Alphons Custodis Chimney Construction Company. These bricks, made in several sizes, are perforated in a vertical direction, the perforations being about  $\frac{3}{4} \times 1\frac{1}{4}$  inches. In a brick  $10\frac{5}{8}$  inches long there are 15 perforations, and 6 in a

5½-inch brick. The external faces of all the perforated bricks are 6½ inches wide by 4 inches in height. The sides of the brick are determined by drawing the radial lines to the center of the circle in which it is assumed the brick will lie.

The bricks for each level are stamped with a different number, indicating to which level they belong. In laying, care was taken to break joints.

The thickness of the first level of radial work was 26 inches, extending upward 13 feet 10 inches. The next level is 16 feet 5 inches in height and 24 inches thick. Each successive level is 16 feet 5 inches in height, the thickness diminishing in the following order: 22 inches,  $20\frac{1}{8}$ ,  $18\frac{1}{8}$ , 17, 15, 13,  $10\frac{1}{8}$ ,  $8\frac{1}{8}$ ,  $7\frac{1}{8}$ .

The corbeling out of brick for ornamentation is confined entirely to the last level. The inside diameter at the top is 8 feet 6 inches.

From the bottom of the upper flue opening, iron rungs were built in the brickwork, forming a ladder to the top of the chimney.

A lightning rod, with four points at top, was placed on the stack after completion, running into the ground below the water-line.

From the bottom of the lower flue opening to a point 22 feet above the floor level, a baffle wall, having a thickness of 8 inches below and 4 inches above the floor level, was built.

When the chimney was about half completed, a test was made with a transit, and the center was found to be about half an inch from its proper position. This error was gradually corrected.

The materials for construction were raised in buckets by a steam hoisting engine. The work was done from the inside from platforms erected as the work progressed, the platform also supporting the tripod holding the pulley wheel through which the hoisting cable ran.

In summary: The stack stands 218 feet high, including foundation, the base of the stack covering an area of 1156 square feet. The total weight of the stack is approximately 1640 tons, with a distributed load of 1.42 tons per square foot of bottom area. It was designed for 2000 horse-power. The total cost was about \$12,250.

years have served, by many costly and humiliating lessons, to impress the essential character of much that was formerly regarded only as superfluous; other things that have been deemed highly important have been eliminated. It has been proved that non-combustible and noninflammable are qualities by no means the synonym of fire proof; that the same processes which produce, under certain favorable and fixed conditions, sometimes destroy under slightly modified or varied con-The destruction by fire is a question of intensity only, and as the floor and supporting loads vary in classifications of buildings, and a building designed to carry a load of 100 pounds per square foot of floor should not be required to carry 200 pounds per square foot, so a building designed to be fire proof for one class or purpose can not be expected to be fire proof when occupied with much more highly inflammable materials, and the application is just as direct, practical, and reasonable in one case as in the other. Time and experiences have served to prove that metals can not, even in incipient fires, be regarded as safe, when exposed to its action, and that almost the entire line of building-stone in common use has proved a very temporary barrier to flame and heat, while at this time serious consideration is given that paradox of modern material, fire-proof wood.

The conditions referred to have complicated the work of the architect and engineer, not only with the obligation of providing for supporting and staying the structure, but with covering the structural features with defensive armor of fire- and heat-resisting materials of such form and character as will render the same acceptable to the taste and comfort of the occupant. And this obligation has assumed most dominating importance; it has puzzled inventive genius and interested capital; it has built high hopes, fostered great expectations, and overturned the logic of philosophers; and to-day it remains largely a question of degree. We require, without doubt, many inconsistencies. As a rule, side wall supports are much better protected than interior columns and girders, simply because it is convenient so to do; outside walls are protected, according to city regulations, with eight inches of brickwork or six inches of terra cotta against the more remote consequences of a fire across the street, and yet many interior supports are deemed amply protected with a mere fraction of this thickness; severe and exacting law requires that each and every small property be divided from its neighbor by an ample fire-wall without communication therein, and yet a third party may fill a whole city block with story upon story of the most inflammable of buildings and tier upon tier of merchandise, suffi-

The absolutely fire-proof house or building will have no wood in its construction unless it be fire proofed; it will have its doors and windows of incombustible materials, and the more vulnerable parts of these will be protected against the direct contact with flame and heat. will be cement or tile finished as well as cement or tile constructed, the light will be admitted through fire-resisting glass, and direct communication between stories will be through stairs or elevators placed in special fire-proof shafts, with which communication will be had by fireproof doors only. Partition lights or sashes and communicating openings will be reduced to a minimum, all corridors being directly lighted from the exterior; all heatings, lighting, and other communicating features common to all parts of the structure will be placed in separate and special fire-proof ducts or shafts, closed at each floor with metal or fireresisting doors. In short, each apartment, and therefore each building, will be at once convertible, in emergency, into a furnace or crematory, in which, without injury to any other apartment or building, the contents thereof may be utterly destroyed, for the conditions under which all the contents of our stores, our homes, our shops, and our offices will in themselves resist fire can not at this age be anticipated.

Prior to the production of the rolled iron "I" beams in the year 1854, the only form of fire-proof construction of floor system that we find in our city and suburbs, and of which some good examples are still to be seen intact, was or is the brick groined arch, which with all its oppressive stolidity, its obtrusive monotony of interior effect, its extravagant occupancy of space and head room, and voluminous masses of dead materials, as a fire-proof form of construction pure and simple is one for which no apologies need be, and no unfavorable comparisons with more modern methods can be, made. This form of construction was in universal use by the Government at that period for record rooms and offices; it is now to be seen in many State capitols and numerous courthouses, and in Philadelphia is notable in the front part of the Franklin Institute Building, and was the form of construction used in the courthouses which formerly flanked Independence Hall, since removed dur-As usually constructed, it is faultless of iron ties or ing restorations. supports, the intersecting arches are usually of such full segment form as to confine the lateral thrust within the safe overturning moments of the abutting walls and corner piers, the back spandrels being usually filled to or above the crown of the arches with a solid mass of bricks or stone and cement or mortar, and the plastering being placed directly on the soffit of the brick arches; the very homogeneity of the entire con-

at court-house row have been estimated to weigh 217 pounds per square foot by Mr. Merritt. Those at the West Chester court-house are even heavier than this. The strength of the groined brick arch construction is measured entirely by the crushing strength of the brick and mortar used in the vaulting and the stability of the abutment walls. It is a system, of course, wholly inapplicable to our modern needs, and even then was confined to lower stories of structures of very moderate height.

The next signal advance, if it may be called such, in the matter of construction of fire-proof floor system in Philadelphia building work was coincident with the introduction of the manufacture of "I" beams in this country. There are a few instances of the use of cast beams for floor construction prior to the use of the rolled wrought-iron I beam, but they are at this time only of interest as a historical fact, as illustrating the total lack of knowledge upon the subject of the effect of fire upon cast-iron, rather than one showing any advance in the structural arts or being of any scientific value whatever. I am not advised that such cast-iron floor systems were used in any important Philadelphia work outside of a few of the older brewery warehouses, where the purpose was not so much to provide against fire as to avoid the weakening and rotting out of warehouse floors, that were subject to frequent inundations, from overflowing and washing of the large vessels used for storage of the liquors.

The manufacturing of rolled I beams, having been begun successfully at Trenton, N. J., in 1854, one year after their first production in France, gave the first essential element of the modern fire-proof floor. and although it is claimed they were first used in a neighboring city. Philadelphia architects and builders were quick to avail themselves of the opportunity to improve the durability of their work, and several buildings using I beams of the first or early production remain to bear witness to that important period. Evidently, under the misapprehension that iron, like brick, was a fire-proofing material, in all cases for a number of years no effort was made to protect the iron posts, beams. and girders in any part that could be conveniently left exposed; in rare instances a flat ceiling extended below the flanges of the floor beams, but no effort was made, in this, to afford the ironwork what was then regarded as useless protection. In a majority of the structures of this period, the concave soffits of the arches between the beams were developed into a concave panel by means of a plaster mold run on the lower flange of the supporting beams, and the same mold continued along the

same, fitted to the angle of lower flange of I beams. This found but limited use, however, and while, in itself, in light of more recent investigation, far from fire proof, yet with the great depth of concrete necessary to fill the space to or above the supporting I beams, considering the thin metal used, it was at least but a very slight retrogression, if any, from the brick arch, in use of both of which lateral tie rods were necessary between the beams; the lower flanges were protected in neither. The sole advantage of the Gilbert method of construction would seem to be that it formed or provided its own centering, in which feature we shall find its counterpart in more recent practice in other materials.

This form of so-called fire-proof construction would seem to be little more than a concrete arching, with the metal centering remaining in place, in many locations doomed, by reason of its exposure to early destruction, and at any time of comparatively small independent strength, since an eccentric loading will cause the naked centering to yield sufficiently to disengage its support on the lower flange of the beams.

This form of floor presents nothing novel to our present view of the matter, and is chiefly interesting as being a Philadelphia product.

The first use of hollow clay tile and iron beams in our city of which I can find any record is still extant in that pioneer modern office building, designed by Mr. Addison Hutton, at Fourth and Chestnut Streets, and popularly known as the Wood Building. It was erected in 1881. The side construction hollow terra cotta arch floor system produced by Henry A. Maurer & Son was used; no effort was made to cover the lower flanges of the beams, excepting with a coat of cement between the slight projections of the tiles, which received the mortar or plaster direct. The building is, of course, far from proof against fire; the posts and girders of iron are all exposed, an open stairway, an elevator shaft, and an open light shaft, extending from first floor to roof with a wood-trimmed sash inclosure all around the four sides, would turn the whole structure into a furnace with great promptness; but the building is, nevertheless, a step toward reducing dead loads of fire-resisting floors to rational weight, which even at this day remains too high.

An American patent was issued to F. A. Peterson on hollow tile fleor construction of burnt clay and I beams, or the equivalent of the latter in deck beams, or double channel beams, as was actually used in one of the first buildings. The date of this patent is April 3, 1855; as shown in this drawing, the beams were set but two feet six inches apart, and a single hollow tile filled the space between, projecting but slightly below

This period was soon followed by the advent of the sky-scraper and the use of light, incombustible, and strong floor and wall materials, for these were at once recognized as an imperative necessity. phia's first successes in this line, the Girard Trust and Drexel Buildings. the latter of which erected in 1887, has a floor system of steel beams and terra cotta arches on an iron or skeleton frame, faced with white marble on the exterior and backed on the frame with hard bricks. It is, fortunately, situated among buildings in which fire-retarding or fire-resisting materials largely prevail, with much intervening space all around it, and is therefore, perhaps, as secure from damage by fire as any building in the city; with the marble envelope of its iron frame in a more exposed position, or in closer proximity to combustible buildings, the damage from an adjoining fire might be very great. From this period to the present time a great variety of fire-proof floor systems have been proposed and a large number of them introduced into Philadelphia buildings. ited time will permit a hurried consideration of a few only of the more favorably considered, together with some of the minor fire-proofing building details and devices.

While the range of materials now recognized to be available for fireproofing purposes, either independently or directly, as the filling between floor beams, for construction of the principal and minor subdivision walls, ceilings, or roofs of fire-proof buildings, or for the protection of the metallic members for the reception and transmission of the chief strains from the loading, both dead and live, and from storms and wind, has narrowed to a small list indeed, much ingenuity has been expended in devising varied forms and means for applying them, and in as varied combinations; we find in Philadelphia, for protection to skeleton framing of some very high and important buildings, such combinations as bricks and limestone, bricks and granite, granite and marble. and, in a few instances, marble and granite alone. Of these, the bricks and terra cotta alone can really be considered a fire-proof material, granite and marble cracking and crumbling badly under the action of heat, and with much greater violence upon the application of a hose stream during a fire. The more recent structures, however, have been almost entirely constructed with brick and other forms of burnt clay facings above the few lower stories, marble or granite work being, as a rule, confined to the entrances and facing of the ground floor, where in event of a fire the effects of heat would be least marked.

With reference to floor systems in practical use, the varied forms and combinations of materials are much greater than those for exterior walls

by making both the top and bottom beds or soffits and top corrugated or dovetailed to receive the plastering work, and are reversible either by inverting or reversing endwise on alternate sides to the key. It is important that the direction of the line of pressure, and therefore the tangent or secant at right angles to the joint, fall within the central third of the depth of the arch in order to insure the perfect stability of the whole arch. Much, further, depends on the care and skill of the workmen in setting the mortar for the various joints, since pressure is so directly and continuously transferred along both horizontal and vertical webs of the tile to the skewback; this is really the crucial point in securing the full strength of the arch.

In many locations upon buildings of irregular form, where beam lines and side walls or girders intersect at acute angles, much difficulty is experienced, and much imperfect work in setting of tile or brickwork of floors may result in the shimming and patching of cut pieces of tiling, for the purpose of filling out the irregular angles and intersections. This is a trouble less experienced in Philadelphia, perhaps, than in any other city, thanks to our checker-board street and block system. This feature, however, does constitute a serious objection to the use of burned clay tiles in certain buildings and in floors of curved form and radial beam plan, and is a point well considered in adopting a form of construction for floors in any new structure.

The terra cotta used principally in all arch construction is of the semi-porous composition of clay, containing a percentage of kaolin, mixed with about sixty per cent. of sawdust and, perhaps, five per cent. of fine coal or coke; this is thoroughly mixed by machinery and carried in batches to the presses, formed by forcing through dies and sorted, dried, and burned, the details of which process should be known to every architect and engineer, as the first step toward a knowledge of fire-proofing methods, but which cannot be dwelt upon at this time. Hollow tiles for interior partition are similarly produced, set as subdivision partitions in all of our modern fire-proof buildings. These blocks will receive and hold rails, much as a piece of wood, and practice has need to avail itself of this feature to a greater extent; in nearly all our more recent so-called fire-proof buildings the use of door studding of wood is all too common and quite uncalled for, since light iron jambs of channel form are quite inexpensive and can be used with as good results for preliminary framing of openings and as plaster grounds, and with less peril to the building, than can wood; within

floor and partition, make it, the concrete monolithic floor system, a triumph in construction.

The work of placing concrete on bar or rod tension elements must, in all cases, be performed above a wood or other centering, usually supported, with iron hooks from the lower flanges of the supporting beams, with wood forms, inclosing girders, after which the whole is filled from above with the concrete; and being well packed around and above beams and girders and well incorporated with the ironwork, it is allowed to set for some days before removal of the supports and centerings. This work, being uniform and continuous and comparatively without detail, can be executed by comparatively unskilled labor, or workmen in charge of an intelligent and practical foreman, with assurance of satisfactory results.

Only the highest grade Portland cements and anthracite boiler (steam) cinders are used by Philadelphia architects and engineers, with an admixture of fine stone grit or clean bar-sand to fill the smaller voids. The loading for the structure itself is estimated on the basis of 85 pounds per cubic foot for cinder concrete, with additions for the mesh and wood floor, determined by weight, and the final examination by the building department is made by actual loading of promiscuous sections of the floor, never to less extent than 600 pounds per square foot, placed clear of the beams, for office or apartment house or hotel work, and 800 pounds per square foot for warehouse, store, or mill work.

Authoritative tests for strength and fire resistance of cement arch and floor work, made by entirely disinterested and competent parties. seem to indicate that the claims of many proprietors as to the virtues of their respective floor systems are entirely valid, but careful selection of materials and great uniformity of execution and manipulation of materials alone will secure the best results; as heretofore stated, the chief differences and special characteristics of the various systems are in the form of metal tie or mesh used in connection with the concrete. forms of concrete and metal partition work are in popular use for subdivision of offices and apartments, the thinner partitions being made solid by filling in between two thicknesses of wire mesh, or expanded metal, wire lashed to vertical angle irons, extending from floor to floor too frequently with wood door studding and base and wainscot blocking, for which there should be a superior means devised of securing these details of finish. Much the larger proportion of fire proofing of partition work in Philadelphia is executed in hollow terra cotta blocks set in cement on the floor system, unfortunately trimmed at

condition. This semi-porous terra cotta can be heated to redness, and can then be plunged into water without any apparent disintegration.

Fire-clay is probably the most durable substance which can be applied to the protection of iron-work for protection against heat. The knowledge of its virtues, however, has led designers and manufacturers to decrease the thickness of the covering in many places to a point where it no longer answers the purpose in a satisfactory manner. In buildings a covering of 1 inch is all that protects the lower flanges of the floor beams, and this is not at all sufficient. The part of the tile which covers the flanges is without air cells, because there is not sufficient thickness to get them in.

Since the substitution of iron-work for brickwork in the structural parts of buildings, the tendency has been to restrict the space occupied by the iron-work to a minimum, and this has resulted in begrudging the every additional inch required for the fire-proof covering, and as a consequence the fire proofing is no longer of sufficient thickness to fully insure that the iron-work will be properly protected in event of great heat. There is but one remedy for this, and that is to increase the thickness of the covering at the vulnerable points. The same criticism may be made of Portland cement coverings; a covering cannot be effective unless it has thickness and air spaces, and it is misleading to talk of fire-proof buildings when the fire proofing is but 1 inch thick at a vital point.

## EXPANDED METAL IN FIRE-PROOF CONSTRUCTION.

#### JAMES S. MERRITT.

#### Read May 18, 1901.

EXPANDED metal has come into such general use, and is so widely known to-day, that it is scarcely necessary to describe its appearance or general characteristics, but it may be interesting to trace its origin and to describe briefly the manner in which it is made, before taking up the subject of its use in fire-proof construction.

About fifteen years ago Mr. John F. Golding was the editor of a trade journal in the city of Chicago. The price of wire was very high at that time, and it occurred to Mr. Golding that a material could be made for fences by slitting and subsequently opening out a sheet of steel to form meshwork. Sheets of the right kind were expensive and difficult to obtain at that time, and Mr. Golding encountered the trials and troubles which seem invariably to beset the path of the inventor. sistent effort and the expenditure of many thousand dollars finally resulted in success, although the process adopted was not that which he at first contemplated, inasmuch as the shearing and opening up of the meshes was accomplished in a single operation. In his application for a United States patent Mr. Golding called the material "slashed metallic screening," showing the use which he had in mind, but, as often happens, expanded metal is adapted to uses of which the inventor never dreamt, and it is probable that the fire proofing of buildings takes fully ninety-nine per cent. of the present output, although millions of square feet of it are used annually for fencing, window screens, elevator enclosures, clothes lockers, etc. The development of the business has been very rapid, and there are, at the present time, four companies in the United States and five or six in Europe engaged in the manufacture of expanded metal. There are also a number of local companies doing fire-proof construction, and there is probably upward of \$10,000,000 invested in the various expanded metal industries. This figure is small when compared to concerns like the United States Steel Corporation and some others, but is of respectable size when it is considered that the

The distance between the housings of the machine limited not only the length of the sheet, but also the breadth, and most of the old machines were unable to produce a sheet more than 8 feet in length by 4 feet in breadth. The sheets of expanded metal were never quite square, and the thickness of the steel which could be worked in this way was limited. Before placing the sheets of steel in the machine it was necessary to cut them to the exact size to give the desired sheets of expanded metal.

In 1894 Mr. Golding invented and patented another method of cutting expanded metal, and this has proved far superior to his former invention, and of wider range. The sheets of steel now enter the machine in the direction of its shorter axis instead of diagonally, as in the old method. The shear blades, instead of being each set diagonally and in a different plane, now consist of a stationary straight lower blade and a series of diamond-shaped blades, in one vertical plane, carried by the movable upper head of the machine. The distance between the points of adjacent blades determines the length of the greater axis of the meshes, while the shape of the blades and the stroke of the machine determine the width of the meshes. In changing the machine from one mesh to another, it is not necessary to change the lower blade, but merely to change the upper blades.

We will suppose that it is desired to cut 3-inch < 6-inch mesh from a sheet of No. 10 steel. Expanded metal above No. 14 gage is usually cut with an approximately square strand, or, in other words, the width of the strand is about equal to the gage of the steel. The sheet of steel is placed in the machine with its edge projecting at the back & inch beyond the lower shear blade. The machine is started, and the movable head which carries the set of diamond-shaped shear blades comes down upon the sheet. The points of the row of upper blades, some sixteen in number, strike the top of the sheet of steel, and begin to shear it away from the rest of the plate, and at the same time to push downward in a vertical direction the strand so formed. The steel must be of the proper quality, as the elongation amounts to over 10 per cent., the corresponding reduction being greater in the thickness than in the width of the strand in about the ratio of 1.16 to 1.00. The upper knives are stopped in their downward movement just before they have traveled far enough to completely sever the strand from the original sheet. The strand is left connected with the sheet by a strip of solid steel, which is technically known as "the bridge." The head is then raised and the plate is shifted laterally a distance equal to one-half the long axis of the mesh which is being cut. It is then fed the width of one strand beyond the

edge of the lower plate, and the machine is ready for a second stroke. When the head descends, the points of the upper blades strike upon the bridge, and begin the shearing process at that point.

After a sufficient number of strokes to form a sheet of expanded metal of the desired width, the feed of the sheet of steel in a horizontal direction is intermitted during one stroke of the head. The upper blades cut through the "bridge" on the same line as the shearing done during the preceding stroke, and as a result the expanded metal is entirely separated from the solid sheet of stock.

When expanded metal is made by this improved process, the sheets are exactly square, and the width of the sheet is only limited by the width of the original sheet of steel, or by the possibility of removing the sheets of expanded metal, which issue vertically downward from the back of the machine. It has been customary to build a pit behind the machine, to get the necessary room, and it is not possible, at the present time, to turn out sheets of more than about 8 feet in width by 9 feet in length, the latter dimension being limited by the distance between the housings of the machine. It is evident that a machine could be arranged, should occasion demand, to cut a 48-inch wide sheet of No. 10 steel into a single sheet of 3-inch mesh expanded metal about 32 feet in width.

Before cutting, the sheets are annealed and then pickled to free them from scale. After cutting, the expanded metal is annealed a second time to remove internal strains or crystallization which may have occurred. The product is also put through a number of minor processes which do not possess any special interest, but are necessary for the proper operation of the machines and to obtain a uniform product.

Few persons are aware of the extent to which expanded metal is used to-day. As an illustration of this, suffice it to say that more than 9,-000,000 square feet, or 200 acres, of expanded metal were used in the construction of the buildings of the Paris Exposition of 1900. This area is greater than that bounded by Market and Sansom Streets, the Delaware and Schuylkill Rivers.

It should be borne in mind that there is really no material known which is absolutely "fire proof." In the opinion of the writer, "fire-resisting" is a better term, and the reasonableness of it is evident when we consider that the protection of an office building or an apartment house, in which most of the rooms contain but little combustible material, presents a very different problem from the case of a warehouse or manufactory, in which the floor-space is not divided at all, and in which

one side are intercepted by the network of steel, and are carried off laterally to the other parts of the structure, instead of passing directly through the partition. In all cases of fire these partitions have acquitted themselves remarkably well, and it is quite likely that some of those present recollect the fire at the Merion Cricket Club a few years ago, where these partitions were practically uninjured, although the upper part of the building was entirely destroyed.

The fire proofing of columns, girders, etc., is done in much the same way as the partitions. Expanded metal lath is secured to light steel members, formed in appropriate shapes, and secured to the structural steel. The lath is thoroughly plastered, and in positions which are more than ordinarily exposed a second layer of expanded metal and plaster is sometimes placed outside the first, with a small air-space between. The plaster is so thoroughly "keyed" or clinched on the back of the lath that it is a very difficult matter to get it off.

Expanded metal lath on wood studding, as well as the "solid partition," has long been used for the exterior construction of buildings. Not only dwelling-houses, but large manufacturing buildings, have been constructed in this way, and the practice is increasing rapidly, as the cost is less than that of brick walls, and the load on foundations much less.

The next step in the development of expanded metal construction resulted from an experiment by Mr. Golding, about the year 1892, of embedding heavy expanded metal in a concrete plate for floor construction. The principle involved is that which was first exploited by Jean Monier, in France, at the time of the Paris Exposition of 1878, and he is generally given credit for the invention, although the advantages of combining iron with concrete were well known before his time.

In the expanded metal system of floor construction a temporary "centering" of plank is first put in place. The sheets of expanded metal are laid on the centering with their sides overlapping one mesh. The concrete—usually consisting of Portland cement, sand, and clean boiler cinders, in the proportion of 1, 2, 6,—is thrown on the expanded metal, and leveled to the proper thickness. Thorough mixing of the concrete, by machinery if possible, and thorough ramming of the concrete in place are always insisted upon, and much of the success of expanded metal construction is due to these precautions.

In using expanded metal in connection with concrete, it is necessary to supply sufficient steel at all points where it is possible for the structure to come in tension. In a floor the most economical position for

## ABSTRACT OF MINUTES OF THE CLUB.

Business Meeting, April 6, 1901.—The President in the Chair. Sixty-five members and eight visitors present.

The death of S. R. Stubbs, active member, was announced.

Mr. Henry G. Morris presented a paper upon "The Parker Steam Generator," which was illustrated with lantern reproductions. He was followed by Mr. J. Parker, the inventor, who read a paper "On the Science of Steam-making."

Dr. A. E. Kennelly gave an informal lecture upon "Submarine Electric Cables," profusely illustrated.

The Tellers reported the election of Messrs. Thos. Welcome Clark, Chas. Dunn, Geo. W. Hancock, Leonard C. Holston, H. W. Huntzinger, Harry W. Jayne, and Thos. McE. Vickers to active membership, and Mr. Henry F. Dirks to junior membership.

REGULAR MEETING, April 20, 1901.—The President in the Chair. Forty-three members and eleven visitors present.

The death of Wm. M. Levering, active member, was announced.

A communication was presented from the Engineers' Society of Western New York, inviting members of the Club to make use of its rooms and facilities in the city of Buffalo during the Pan-American Exposition.

Mr. I. Wendell Hubbard presented some "Notes on the Construction of a Factory Chimney," followed by Mr. Francis Schumann with a paper upon the "Design and Construction of Factory Chimneys." A general discussion upon the subject of chimneys and the production of draught was participated in by Messrs. D. D. Elder, R. W. Polk, Frank Sweeney, John C. Trautwine, Jr., James Christie, and Henry I. Snell.

REGULAR MEETING, May 4, 1901.—The President in the Chair. Sixty-five members and seven visitors present.

The President called attention to the new method of illuminating the meeting-room, first used on this date.

Announcement was made of the election to honorary membership of Messrs. William Price Craighill, Charles Town, W. Va.; John Fritz, Bethlehem, Pa.; Chas. Haynes Haswell, New York; Benjamin F. Isherwood, New York; George W. Melville, Washington, D. C.; and Wm. Hasell Wilson, Philadelphia.

Mr. Harrison Souder presented some notes on the "Design and Maintenance of Highway Bridges, and Pile Driving." His remarks were illustrated by drawings and photographic views of the work projected by the electric lantern. The subject was discussed by Messrs. Edwin F. Smith, Edgar Marburg, Carl Hering, Benjamin Franklin, Richard G. Develin, Charles Hewitt, Thomas G. Janvier, and others.

Mr. John Birkinbine sent a written discussion in which he called attention to the unwise policy of city councils of Philadelphia in appropriating for the present year less than one-tenth per cent. of the value of the 300 bridges in the city, for the purpose of their maintenance.

REGULAR MEETING, May 18, 1901.—The President in the Chair. Fifty-two members and ten visitors present.

Mr. Edwin F. Bertolett read a paper upon "Fire-proof Construction in Philadelphia," and illustrated his remarks with a large series of views.

Mr. James S. Merritt presented a paper upon "The Use of Expanded Metal in Fire-proof Construction," profusely illustrated.

Business Meeting, June 1, 1901.—The President in the Chair. Seventy-four members and ten visitors present.

Mr. C. M. Mills invited the members to inspect the new Grays Ferry Bridge on Saturday, June 8th.

The Tellers reported the election of Mr. Robert Schmitz to active membership and Mr. Chas. H. Machen to junior membership.

A topical discussion was participated in by Messrs. Edgar Marburg, James Christie, L. Y. Schermerhorn, and John C. Trautwine, Jr., on "The Duty of the Engineer," followed by remarks from Messrs. Christie, Birkinbine, Falkenau, Holcombe, and Livingston.

## ABSTRACT OF MINUTES OF THE BOARD OF DIRECTORS.

REGULAR MEETING, April 20, 1901.—Present: The President, Vice-President Schermerhorn, Directors Christic, Hewitt, Comfort, Levis, Riegner, and the Secretary (Vice-President Smith was also present before adjournment).

The Treasurer's report showed:

Balance, February 28th,	<b>\$</b> 2532.62
March receipts,	246.10
	\$2778.72
March disbursements,	162.60
Balance, March 31, 1901,	\$2616.12

Upon motion the House Committee was authorized to have twenty electric lamps installed in the meeting-room.

Special Meeting, May 4, 1901.—Present: The President, Vice-Presidents Schermerhorn and Smith, Directors Hewitt, Comfort, and Riegner, and the Secretary.

The Secretary read the ballots which were cast by every member of the Board of Directors in favor of the election of the nominees for honorary membership, and in accordance therewith the President declared Messrs. Wm. Price Craighill, John Fritz, Chas. Haynes Haswell, Benj. F. Isherwood, Geo. W. Melville, and Wm. Hasell Wilson elected to honorary membership in the Club.

REGULAR MEETING, May 18, 1901.—Present: The President, Vice-President Smith, Directors Christie, Comfort, and Riegner, and the Secretary.

The Treasurer's report showed:

Balance, March 31st,	<b>\$</b> 2616.12
April receipts,	707.05
	<b>\$</b> 3323.17
April disbursements,	698.04
Balance, April 30, 1901,	<b>\$</b> 2625.13

Upon motion the Board ordered that on June 1st there should be a business meeting of the Club for election of members, and that members elected at that time should be charged only one-half year's dues to December 31, 1901.

The House Committee presented an appraisement of the furniture and equipment of the Club in its house on May 1, 1901.

The Secretary was requested to have a new Directory published in the same style as heretofore.

Special Meeting, June 7, 1901.—Present: The President, Vice-Presidents Schermerhorn and Smith, Directors Comfort and Riegner, and the Secretary.

The Treasurer's report showed:

Balance, April 30th,	<b>\$</b> 2625.13
May receipts,	170.10
3.6 1° 1	\$2795.23
May disbursements,	601.00
Balance, May 31, 1901,	\$2194.23

The Library and Publication Committees recommended that the prices of Proceedings, for single numbers, be made for libraries and newsdealers 35 cents, and for all others (except members), single numbers 60 cents; all other prices remain as heretofore.

## ADDITIONS TO GENERAL LIBRARY.

From Chief of Engineers, War Department, Washington, D. C. Report 1900, Parts 7 and 8.

FROM UNITED STATES GEOLOGICAL SURVEY.

Water Supply and Irrigation, Papers No. 43.

FROM UNITED STATES COAST AND GEODETIC SURVEY.

Annual Report of Superintendent, 1899.

From L'Association Technique Maritime, Paris, France. List of Members, 1901.

FROM FAIRMOUNT PARK ART ASSOCIATION.

Twenty-ninth Annual Report, Board of Trustees, and List of Members.

FROM UNIVERSITY OF CALIFORNIA, BERKELEY, CAL.

Geology of Central Portion of Isthmus of Panama.

FROM THE ENGINEERS' CLUB OF NEW YORK.

1901 List of Members.

FROM BROOKLYN ENGINEERS' CLUB.

Proceedings for 1900, Vol. IV.

From Wm. Ford Stanley, London, England.

Surveying and Levelling Instruments, 1901.

Mathematical Drawing and Measuring Instruments, 1900.

From Societe des Ingenieurs Civils de France. Annuaire de 1901.

From Regio Museo Industriale Italiano, Torino, Italy Annuario per L'Anno Scolastico, 1900-01.

From Metropolitan Water Board, Boston, Mass. Sixth Annual Report.

From Theodore Cooper, Esq., New York. General Specifications for Steel Railroad Bridges and Viaducts, 1901.

From University of Illinois.

Technograph, No. 15, 1900-01.

From W. S. Blatchley, Indianapolis, Ind.


Indiana Department of Geology, Report, 1900.

FROM J. C. BRANNER, STANFORD UNIVERSITY, CAL.

Annual Report, Arkansas Geological Survey, 1892, with Atlas.

From City Parks Association of Philadelphia.

Thirteenth Annual Report, 1901.

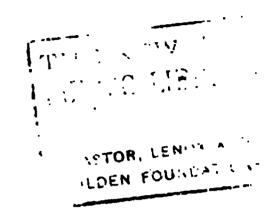

# ERRATA, VOL. XVIII, NO. 3.

## CHIMNEY CONSTRUCTION.

## PAGE 164:

Eighth line from top read  $w = \frac{x m}{A h}$  instead of  $\frac{X m}{A h}$ .

Seventh line from bottom read (II) instead of (I) Or interchange Figs. I Fifth line from bottom read (I) instead of (II) and II, page 165. Fourth line from bottom read x > k instead of x < k.


Second line from bottom read  $p = \frac{mx}{I}d - \frac{md}{ay}$ ; instead of  $p = \frac{mx}{I}$ ;  $d = \frac{md}{ay}$ ;

## PAGE 166:

Tenth line from top read 
$$\frac{\pi h}{3} \left( \frac{D^2 + Dd + d^2}{4} \right)$$
; instead of  $\frac{\pi h}{3} \left( \frac{D + Dd + d^2}{4} \right)$ ;

### PAGE 168:

Twelfth line from top read were instead of where Sixth line from bottom read lever instead of level.



# **PROCEEDINGS**

OF

# THE ENGINEERS' CLUB

OF PHILADELPHIA.

ORGANIZED DECEMBER 17, 1877.

INCORPORATED JUNE 9, 1892.

Note.—The Club, as a body, is not responsible for the statements and opinions advanced in its publications.

Vol. XVIII.

OCTOBER, 1901.

No. 4.

# THE DUTY OF THE ENGINEER.

A Topical Discussion, June 1, 1901.

THE DUTY OF THE ENGINEER TO HIMSELF AND HIS PROFESSION.

#### EDGAR MARBURG.

THE discussion this evening is intended, I understand, to develop a somewhat informal expression of opinion on the duties of the engineer in his several professional relations. I have been asked to say a few words on his duty to himself and to his profession. A moment's consideration will show that the two are indeed inseparable. There is nothing an engineer can do in furthering the interests of his profession by which he, himself, does not become the chief gainer. The contrary is no less true. He who is remiss in discharging his duties to his profession to the measure of his ability fails to a like extent in promoting his own interests. This is, indeed, but another way of saying that every successful effort in doing something by which the profession profits adds to the professional capital of the doer, and hence redounds directly to his personal advantage. There was a time in the earlier days of engineering when its few followers had to rely upon their private note-books, containing the accumulated store of their professional knowledge, as their chief source of information. And it was natural that data gathered by the slow, laborious process

of personal experience, when other means were almost wholly lacking, should have been more or less jealously guarded. In those days engineering societies had no existence, or next to none, and engineering literature was of the crudest kind. Just as every trade and every business had its "secrets," engineering had its mysteries. such "secrets" are seldom kept, not because men have grown more altruistic, but chiefly because they recognize that it does not pay to keep them. The accumulation and diffusion of knowledge along all lines is now proceeding at such a tremendous rate that the greatest possible contribution on the part of any single individual sinks into comparative insignificance. The gain that may accrue to him by selfishly withholding the results of his personal experience and observation is apt to be as nothing compared with the professional prestige he may derive from their publication through the widest channels. It is true that there are not wanting men to-day in our profession, as in every other, who, like the sponge, absorb what comes within their narrow reach and yield it only upon pressure. Happily such men constitute an insignificant minority. Nor can there be a doubt that they are themselves the chief sufferers of their narrow-mindedness. We can all bear ready testimony to the cheerful willingness with which engineers in general are wont to place the results of their experience at the free disposal of their colleagues, both on private and public occasions. By some this policy is carried so far that they refrain from patenting devices that show good possibilities of profitable development. While no one can reasonably condemn him who seeks to reap the largest legitimate returns from ideas that are his own, we can not refrain from applauding the high-mindedness that prompts a contrary course. And such examples are by no means so infrequent that they must be classed as rare exceptions.

Coming now to the direct question before us,—the duties of the engineer to himself and his profession,—which, as I have said. are really one and the same, the answer can be put, I think, in very few words. His duty is to hold high professional ideals and to make a conscious and conscientious effort to apply them to himself, as nearly as may be, in all his professional relations. To consider in any great detail just what these ideals should be and how they are to be observed under various contingencies, would be equivalent to formulating a code of professional ethics. To attempt even an outline of such a code would be alike presumptuous and unprofitable. Since engineers are human, they may be broadly classified, ethically, under two

headings. First, that overwhelming majority who would not stoop to unprofessional practices, under any consideration; and, second, that small but ever-present minority who strive persistently for momentary advantage without a nice regard to the means by which it is to be attained, or for the rights of others. Men whose moral sense is so warped will never be redeemed by any artificial code that may be prescribed for their professional guidance. Their natural tendencies may perhaps be somewhat curbed, or at least their influence for evil partly negatived, by giving the widest publicity to their practices whenever they assume a form that plainly warrants public exposure. Our leading engineering journals have not hesitated, in extreme instances, to assume this duty.

It has been recommended from time to time that the engineering societies should exercise a sharp restraint upon unprofessional conduct through their power of expulsion. Experience has shown, however, that this power is rarely or never brought into play; not only because the chief offenders are apt to be beyond their pale of membership; but because it is human nature for men to condemn silently rather than accuse openly. Moreover, the right of forcible deprivation of membership is wisely so hemmed in by restrictions that it is not easily made operative. Between the two extremes, this condition is clearly preferable to one by which the professional character of the members might be lightly exposed to indiscriminate assault inspired perhaps by individual caprice, jealousy, or prejudice. It is well, too, to remind ourselves that a wide charity should mark our judgment of an apparently unprofessional act on the part of another. While the deed itself may seem clearly revealed, there are often contributing and palliating circumstances that are unknown and unknowable.

And after all, may we not rest confident in the belief that there is no calling in which the average standard of professional conduct is more wholesome than in our own, and none more free from arrant quackery? It is, of course, not pretended that engineers are naturally of a superior moral fiber; but their training and, in fact, their every duty require an accuracy of thought, and honesty of reasoning, that make for truth. Moreover, the work of the engineer from the humblest to the highest is apt to come under the direct scrutiny of his peers, by whom its merits or faults are easily discerned, and upon whom his preferment is often directly or indirectly dependent. Thus it comes that success in engineering is, generally speaking, in proportion to real desert. Pronounced exceptions to this rule are comparatively

uncommon. Unlike the physician, the engineer can not conceal downright incompetency behind an agreeable personality, nor can he count on burying his mistakes. Some years ago there appeared in one of our foremost magazines \* two papers, in which the question, "Can lawyers be honest?" was ably presented from opposite points of view. While I would yield to none in my tribute of respect to the legal profession in its best estate, it is a comforting thought that in our own profession the very suggestion of such a heading, much less a serious argument upon the question, were inconceivable. In claiming this, we need not withhold the admission that the engineer has probably less temptation to depart from normal, every-day standards of rectitude than has his brother of the law. Nor does he need to defend his practices by professional traditions not always easily reconcilable with such plain standards.

At the coming annual convention of one of our national engineering societies a discussion is to be held on the question whether the interests of the profession and the duties of its members to the public demand that candidates for admission to the practice of engineering should be required to give some formal evidence of their competency. At first it might seem that there could be but one answer, and that in the affirmative. A little reflection will show, however, that there is much to be said on the other side. The conditions in our profession are peculiar in that they offer opportunities of employment through innumerable channels to men who need possess only the merest smattering of theoretic knowledge. While this imposes pretty definite limitations to their ultimate advancement, they may be competent to perform such minor duties as are entrusted to them in a wholly satisfactory manner. Yet men of that type would doubtless be excluded by any examination worthy of the name. To me such a course would appear unjustifiably harsh. Not only would it work a hardship to the individuals immediately concerned, but also to their employers. In fact, there would seem to be no reasonable warrant for subjecting engineers in general, who are employed on a salary, to tests other than those naturally imposed by the requirements of their The employer, whether individual or corporation, may well be trusted to determine the question of their fitness to his entire satisfaction.

When we come to consider the relatively small number of engineers

<sup>\*&</sup>quot;The North American Review," vol. CLII, 1891, pp. 194 and 504.

in independent practice, there is more ground for reasonable differences of opinion. Whatever tests of competency may be applied, however, it would seem that they should rather take the form of a searching inquiry into the professional record of the candidate than an examination. While it is easy to set an examination that will exclude incompetent men, it is exceedingly difficult to prevent the exclusion of men who are really competent. The tendency of an examination is almost unavoidably to set a premium on memory rather than general intellectual fitness; on so-called book-learning rather than on practical experience and plain common sense.

Let us turn aside a little further to consider for a moment an interesting matter, not strictly germane to the subject. The question is not infrequently asked, Why does the profession of engineering not receive the same measure of recognition by the general public that is so freely accorded to the so-called learned professions: theology, medicine, and law?

While public sentiment is doubtless growing more enlightened, one is still often amazed at the vague notions betrayed by men of good average information concerning the functions of the engineer. Even at this day a civil engineer is not uncommonly looked upon as a surveyor who occasionally turns his hand to other duties. A college graduate, speaking of civil engineering, once said to me with blunt frankness, that the prospect of spending one's life looking through the small end of a telescope seemed to him singularly unattractive. I replied that I thought all men who regarded engineering in that light would doubtless share his feelings.

The mechanical engineer is scarcely better off. The average intelligent layman looks upon him as some kind of a cross between an inventor, a machinist, and a stationary engineer; but is sorely puzzled to identify him more closely. As for the electrical engineer, he is popularly regarded as an inventor, pure and simple, whose talents may sometimes elevate him to the so-called "wizard" class.

Quite recently I was asked by a doctor of philosophy to explain the distinction between a civil and a mechanical engineer. I could not resist the temptation to reply at first that there was none, since every mechanical engineer was really a civil engineer, the one being the specific, the other the generic designation. I was honest enough to add that the mechanical engineers were somewhat inclined to object to this classification.

A highly cultivated woman whose son proposed to study engineering,

recently observed in my presence that she could not account for what she called her son's peculiar mechanical bent; that the male members of the family had been professional men for generations; but that her son seemed determined to become a mechanical engineer and she supposed she would have to let him have his way. She came to this conclusion in a tone of such helpless resignation as to remind me forcibly of the luckless hen who had hatched out an ugly duckling.

These instances are believed to be fairly characteristic in showing the imperfect understanding and the inadequate appreciation of the public at large of engineering as a profession. Admitting the fact, what are the reasons? If we turn to our engineering schools—which, by the way, are seldom counted with the professional schools—we find their average standard of admission and the prescribed length and breadth of their courses distinctly in advance of those in medicine and law; nor are they, to say the least, less difficult. Speaking generally, there is no course in a university held in more wholesome respect by the student body, or more carefully shunned by those in quest of "snap" courses, than those in engineering. And it may be claimed with equal confidence that there is no profession which makes more exacting demands upon its followers, and in which high honors are more difficult of attainment or, on the whole, more deservingly bestowed. Clearly the answer, whatever it may be, must be sought in other quarters.

To say that engineering as a profession is yet in its swaddling clothes is true if the reckoning be in years. If gaged, however, by the more rational standard of achievements, we find it has attained to giant's stature. We rest our claim to professional recognition upon the fact that engineering has its basis no longer in empiricism, but in science. The justice, and, in fact, the meaning, of that claim, however patent to ourselves, can appeal but dimly to the layman. His appreciation of our work is apt to be in proportion to its outward magnitude or striking novelty. To him the building of a railway means little more than an amount of digging and filling, the laying of ties and rails, and the dumping of ballast. The construction of water-supply and sewerage systems seems to consist essentially of the opening and closing of ditches for the reception of simple pipes, whose sizes, he vaguely conjectures, are fixed somehow by experience. As for the building of pavements and ordinary roadways, or canals, dykes, and levees, evidently nothing could be much easier. In short, it is impossible for him to fully grasp the idea that there is scarcely a detail of

processes apparently so simple that has not been made the subject of profound scientific study and that is not undergoing constant change in the light of new inventions and discoveries.

Another reason which militates strongly against us in shaping the popular estimate of our profession lies in the fact that the overwhelming majority of engineers are employed for fixed hours at fixed salaries. The fewest number stand in direct personal relations with their clients. This circumstance is, indeed, an unfortunate one for us from more than one point of view.

It must be conceded, too, that public appreciation of a profession and of its individual members stands in a not altogether remote relation to their earning capacity. To maintain a high social position on a slender income is becoming increasingly difficult and, in our larger communities, is well-nigh impossible. We cannot blind ourselves to the fact that the maximum earning capacity of engineers is insignificant compared with that of the most successful men in other professions. When life or liberty, character or fortune is at stake, there is no haggling over fees. Retired statesmen find apparently little difficulty in speedily accumulating snug fortunes in legal practice. I need not add that engineering offers no such possibilities. engineering a net professional income exceeding ten thousand dollars per annum is, indeed, a very rare exception. To be sure, I am leaving out of consideration that large number of men who owe their success in kindred vocations more or less directly to their engineering training; and those to whom this training has served as a stepping-stone to salaried positions of high responsibility and trust, in lines not strictly technical.

I should apologize, perhaps, that I have strayed so far from my subject. In so far as I have kept to the text set me, I have referred in a somewhat general way to the duty of cherishing high professional ideals. This does not mean, of course, that we shall content ourselves simply by maintaining a strict personal standard of professional integrity; nor does it mean that our obligations are fully met if, in addition, we strive to do our honest share in furthering engineering knowledge. That these conditions are fundamentally important, surely none would question, and therefore they do not merit more than passing notice.

But high professional ideals have another significance, no less vital, though perhaps less easily defined, which we are prone to overlook. That is, that we should school ourselves to take at all times the broad-

est, most liberal view of our profession, not only as such, but in its relation to society; that we should be keenly alive to the danger of degenerating into narrow specialists, with small concern for matters beyond our little individual spheres, even within our own profession much less for things that lie without. That engineers are apt to be distinctly narrow for men of their intellectual attainments is an arraignment which I fear we cannot fairly escape. How often do we find ourselves quibbling over petty details, magnifying them out of all due proportion, and incidentally obscuring larger issues! Figuratively, we often fail to perceive the city for the houses, or the woods for the trees. Applied to interests which seem to lie without our immediate professional horizon, the indictment becomes even more serious, and operates more plainly to our disadvantage. Why should high executive positions in public and industrial affairs, with duties belonging essentially within the province of the engineer, be filled so commonly by non-technical men? Is it not due primarily to these very limitations in our own qualifications? I am aware that the cause is not infrequently to be found in limitations of another nature distinctly to our credit. But that fact will not serve as a sweeping exoneration. It has come to be a trite saying that as a rule engineers are lacking in executive ability in business matters. Though we are apt to resent this imputation, and are not embarrassed for want of numerous prominent examples in our defense, yet our sober judgment tells us that it contains more than a germ of truth.

The one-sidedness of our development is due in a measure to causes normal and unavoidable. But in a larger measure the fault is one for which we are at least passively responsible. The tendency toward narrowness is apparent even among students pursuing engineering Studies not strictly technical are too often looked upon as useless and slighted accordingly. This tendency is deplorable in a Not only because the purely cultural studies occupy double sense. at best a scant place in the curriculum, but because there is probably no profession which affords less opportunity for recovering such lost ground in after-life. It is a rule, rather than an exception, that engineering students are not able to write creditable English upon graduation. We are painfully aware, too, that this fault is not confined to the fledglings of our profession. Let me quote the testimony of the Past-President of the American Society of Civil Engineers, in his own words, as spoken at the last annual convention of that society, in London: "For two years, during my period of holding the office

of Vice-President, I was a member of the Publication Committee, and I was surprised at the manner in which some papers were presented. What I am saying now is of course not for general publication, but simply for the members of our Society. . . . If some of the papers presented to that Publication Committee by men who stand high in our profession had been presented by pupils of a high school, they would never have been permitted to receive consideration." Those of us who have served in a similar capacity can appreciate the justice of these strictures, humiliating as they are. And it is better that they should be emphasized too strongly than that they should be glossed over.

We owe it to ourselves and to our profession to recognize the danger to which I have alluded,—the danger of unsymmetric development,—and to make well-directed and persistent efforts to escape its consequences. We should seek to keep in intelligent touch with the world of men and affairs. We should strive to take a generous interest in all higher lines of human endeavor. We should try to cultivate a taste for art, an appreciation of good literature, and of all else that makes for culture and refinement. We should have a proper regard, too, for social forms and usages, by estimating them at their true worth. To despise, or to affect to despise, the amenities of life is almost as censurable as to make them the chief aim and end of one's existence.

And, in conclusion, I cannot refrain from voicing my profound conviction that in the measure in which we, individually and collectively, shall succeed in meeting more nearly the ideals thus broadly indicated, in that measure we shall speed the day when public sentiment will accord to engineering that honorable place among the learned professions to which its title is in reality so clear.

# THE DUTY OF THE ENGINEER TO HIS CLIENTS OR EMPLOYERS.

#### JOHN BIRKINBINE.

The committee has divided "The Duty of the Engineer" into four sections, but I shall speak only of "The Duty of the Engineer to His Clients or Employers."

In accepting the division as planned, we merely segregate the duty

of the engineer for the purpose of discussion, for no engineer can perform his full duty who forgets either his individual reputation or the honor of the profession which he has chosen, or who fails in loyalty to his clients or employers, or who is unjust to contractors or contractors' employees performing the work under his direction, or who does not realize the integrity of his work, and his conduct is the gage by which the general public measure the engineer.

The section which I discuss presents two general classes—"clients and employers"—as those from whom the engineer is expected to earn his living, and the following definitions are offered as distinguishing the classes:

An engineer's "client" is an individual, firm, or corporation calling upon him for special or temporary service, the performance of which terminates the relations. This connection may cover a single engagement, or it may represent a series of periodic or spasmodic engagements. But in each particular case it may be assumed as a general rule that the more faithfully and energetically the engineer represents a client, the earlier his temporary engagement terminates.

An "employer" may be considered as an individual, firm, or corporation, served by an engineer under a regular compensation for a specified period, actual or implied, assurance justifying the expectation that loyal service will bring advancement, or at least continued employment. To state the distinction briefly in shop vernacular, an engineer when serving clients faithfully is "working himself out of his job," but when loyally representing employers he is "holding down his job."

The ethics which govern a true engineer are the same in each case, and he will be as faithful to the interests of clients during a temporary engagement as to those of employers under a longer term.

Accepting the definitions of client and employer, the relations of the engineer may be expected to be closer and more confidential with employers than with clients. The almost constant contact of the engineer and employer permits of mutual confidences, the abuse of which by either party is little short of criminal—confidence which permits the principal to trust the engineer and the latter to advantageously serve his employer.

Under normal conditions a client and the engineer meet often as strangers, the engineer being selected because of his reputation and the client served because of his reported financial standing. Each must. however, meet the other in confidence, and clients often place impor-

tant interests at the dictum of an engineer almost unknown personally, this action being dictated by the reputation of the engineer. The profession may well be proud of such recognition, and as the reputation of the engineer is his capital, he is a fool who impairs it by acts which jeopardize his good name among men, and bring to him the unrest which follows deviation from the path of rectitude. Being treated with confidence, it is his duty to deserve such recognition by faithfully guarding the interests of either client or employer.

In his intercourse with clients and employers the engineer co-operates with all phases of the "genus homo." He may find the individual or company employing the engineer because of special knowledge, generously recognizing this knowledge, and giving him unreserved confidence, unless the engineer demonstrates incapacity or violates this faith, when a directly opposite course is justly pursued. But the work is not always so pleasant nor the duty so plain. The engineer meets with those who, failing to discriminate between power applicant and power exhibited, run great risk by demonstrating brief authory, often with a result such as befell the owner of a fractious horse, who grasped the reins from the hands of a competent driver at a critical time. The driver, of course, was blamed for the loss of the horse and vehicle and for the crippling of the owner, while the owner was at fault.

There are occasions when the engineer must assert his position in opposition to a client or employer, but such assertion should be based upon his interpretation of loyalty to the interests intrusted to him, and not by wounded pride. Circumstances may arise which demand that to protect the interest of his client he must refuse to follow a procedure suggested, or to follow it under formal protest, although such action may jeopardize his position or engagement.

A little learning is quoted as being dangerous, and probably in no situation is this axiom more evident than when the engineer is serving municipalities. It is when he has the public for a client or employer that one realizes how rapidly engineers are developed from men whose training or education has given neither experience nor knowledge in this specialty, but whose opinions or advice are volunteered freely and often urged with persistence. In such relation the engineer may unwittingly become a factor in local politics; for if the public improvement which he is called to direct is formulated by one political faction, all connected with its prosecution become targets for opposing factions. Under these circumstances the engineer is also apt to learn from the press what was evidently undiscovered or overlooked before—that the

community has a liberal supply of local talent with capabilities equal to or exceeding those of the engineer, which talent could have been procured at a fraction of the munificent (so called) compensation which is paid to the incumbent.

In determining his duty to the public as client or employer the engineer may have difficult problems to solve, and in performing this duty he may need to show bravery equal to those who face the cannon's mouth; to exhibit judgment as keen as that of a competent jurist; or to demonstrate a determination to overcome obstacles fully as pronounced, but seldom as fully recognized, as has made great generals or noted managers.

An engineer may hold his position in municipal government by being subservient to political dictation, but then he should be classed as a politician and not as an engineer, or he may satisfy himself, but gain no lasting credit, by attempting to shift responsibilities upon others. He whole is a position of this character with the greatest credit,—and credit is not always synonymous with applause,—or who serves the public best, must act from unselfish motives, exhausting to the limit his authority before he is entitled to consideration by reason of the inactivity of superiors or uncertainty of legal status. The public is an exacting employer, but ultimately recognizes ability, integrity, and persistence. It is not quick to make a martyr of one who chronically exhibits the bonds which tie his hands; nor will it create a hero of one who extols his exploits instead of permitting his work to exalt him.

The engineer meets (more often as clients than as employers, if the definition before given is accepted) those who seek benefit at the sacrifice of the high standard which should govern him. In many instances no wrongdoing is intended or suggested by clients whose anxiety to have a favorable report upon a process, property, or project obscures their appreciation of the fact that the engineer is employed, not only because of his experience and skill, but also because he is supposed to be unbiased. No engineer takes pleasure in condemning what his clients have anticipated would result to their advantage, but he is often compelled to do this, and to realize with what apparent aversion fees are at times paid for counseling against a procedure which would cause great losses, possibly financial ruin. At times he must sacrifice prospective engagements when his knowledge of conditions is sufficient to demonstrate to his satisfaction that the result of his work would be contrary to the expectation of those seeking his services.

There is no profession which outranks that of the engineer. We can

honor the man who has studied law, or the doctor who is familiar with the human form and can tell so much of what is in it, but they do not handle the forces that engineers are called upon to master. Therefore our standards should be the highest, and such that we can always be in a position to assert ourselves and stand for what is right.

Another class of clients which the engineer occasionally meets do not hesitate to suggest compensation or fees contingent upon the favorable character of reports or results of examination. There are undoubtedly conditions which may make such a course equitable, but proffered engagements of this character are generally questionable, and in determining his duty the engineer may safely draw the line of declining any engagements the terms of which would weaken his conclusions in the eyes of either client or prospective investor, assuming that the terms were in each case known.

In specifying materials or appliances, the engineer's duty to his clients or employers requires that he secure those best suited to the purpose, at least cost to his principals, and his specifications must therefore be drawn to invite as active competition as practicable. It is the safer policy to have an excess of bids than by restrictions to place the client or employer in the real or fancied power of bidders.

Each engineer has his preferences and is entitled to express them, but in determining "duty" he is wise who encourages active competition for work submitted to him.

The engineer who chooses his profession as a means of acquiring wealth seldom reaches that goal. If he is able to live in comfort and with but moderate anxiety for the future, he is in advance of the majority of his professional brethren. With him "a good name is rather to be chosen than great riches." There are comparatively few engineers who may be considered rich, and this limited number includes men whose accumulation has been the result of judicious investment, of legacies, or of business outside of or possibly related to engineering.

With such conditions facing the engineer, and appreciated by those with whom he associates in business, the temptation is great to augment an income by means which are inviting, and some of which at least do not suggest impropriety. Probably commissions present the most subtle of these temptations, for the engineer recognizes that members of some kindred professions depend largely upon these for revenue. This is a subject which could be discussed at length, but in determining his duty to clients he may have as a guide the statement that "no man can serve two masters."

The compensations paid to engineers do not, as a general rule, equal those received by other professions in which the cost of preparatory study and work, or of library, and the expenditure of time and energy, is less. But having entered the service of client or employer, the acceptance of commissions without their knowledge and assent, places the engineer in an unsafe position; and although his earnings may be unsatisfactory, he must be true to those whose service he has entered, be this temporary or permanent.

Engineering is an exact science and it is expected to produce definite results. The client or employer submits problems which he expects the engineer to work out with the greatest practicable precision. But he is employed as a human being, and as such he is fallible. When engineers cease to err it will be after having done their duty to God and man, they pass beyond the sphere where clients and employers exist.

In determining his duty the engineer is called upon to use the exact science upon which the foundation of his profession is laid, so as to present to client or employer the nearest approach to correct results which his education and experience, supplemented by conscientious study of the work of others, permit.

With a profession that has accomplished so much, with an appreciation of its honor with as pronounced integrity as exists in any other profession or business, we cannot afford to have a standard or hold a position which is not the highest. We are called upon to handle nature's forces and the products of nature, and to put them into use. Review any special line of this work, whether electrical, hydraulic, mining, mechanical, or civil, the great bridges, the development of water-powers, the marvelous advance in electricity, metallurgy, and mining, in fact in all branches—you find a mine of wonderful achievements made by men who have been true to the highest instincts—men who have grasped opportunities, men who have been subject to and resisted temptation. When we use that German symbol "Ich dien"—I serve—we should not fear a finger being pointed at us when those who know we serve can say that there is a man true to himself and his profession.

### THE DUTY OF THE ENGINEER TO HIS CONTRACTORS AND EMPLOYEES.

#### L. Y. SCHERMERHORN.

For about thirty years of my life I was engaged as an engineer, in a practice sufficiently varied to bring me into contact with nearly all kinds of contractors. During the last ten years of my life I have been more or less a contractor, and this, I think, permits me to speak at least in the light of experience on both sides of the question.

The proper presentation of the third subdivision of this topical discussion, or "The Duty of the Engineer to his Contractors and Employees," will be difficult to accomplish in the short time at my disposal. I therefore trust that this branch of the subject will be amplified in the general discussion which will follow.

The engineer in responsible charge is generally either the author of the plans and specifications upon which the work is to be carried into effect, or he is the employed agent of such author. In either case his relations to the contractor are the same. He is assumed to be an expert in the work which he designs or directs, and the assumption warrants the inference that his knowledge of the work in all its details is as great, if not greater, as that of the contractor. This assumption is justified by the usual declarations of the specifications, making the engineer the only recognized interpreter of the meaning of the plans and specifications for the work covered by the same.

No two engineering works are more than generally alike; and specific differences will exist that make each work a special study and almost a special design. Through the preliminary study given to the development of the plans and specifications the qualified engineer should be able to acquire a fuller knowledge of the details of the work than can generally be obtained by the contractor through means and time usually at the latter's disposal, between the issue of the plans and specifications and the tender of the contractor's proposal for the work. This establishes the fact that, except in simple and routine constructive work, the designing engineer has a better opportunity than the contractor to thoroughly familiarize himself with all the difficulties and uncertainties of the work. Therefore in this respect the designing engineer enjoys an advantage over the contractor which it is his duty to recognize, through the plans and specifications, by fairly placing before the contractor full information upon points which otherwise would

escape the contractor's knowledge. His duty is something more than to vaguely suggest possible difficulties and requirements, and then create for himself a refuge, by ignoring all responsibility for lack of reliable data, by providing that the information upon essential points in the specifications is not guaranteed, and that the contractor through his personal knowledge and examination will be assumed as having full and correct information upon all matters involved in the work, even though the engineer may have suppressed a part of his information. It goes without saying that the contractor has, in the end, to assume such responsibilities; but it should be based as far as possible upon a full knowledge and frank avowal of all that the engineer knows of the work.

This duty of the engineer is a delicate one, and the personal equation of the individual will largely determine his action in the matter. Should his personal views be interfered with by those of his employer, then the engineer must determine for himself how far the ethics of his profession and his duties to himself and his fellow-man will rightly permit his judgment to be overruled by his superiors. To intentionally suppress important information which would be difficult or impossible for the contractor to obtain is at once a crime against the public and an error which is more than likely to assert itself unfavorably in the work with which it is connected. Dishonesty in the administration of work will surely result in dishonest execution, and this in turn may lead to disaster, involving both property and human life.

There never was an alleged wise saw that had less foundation in fact than that which states that "competition is the life of trade." If the word death were substituted for life, the statement would be nearer the truth. In nearly all callings, intelligence, ability, and its proper accompaniment reputation, count for much in winning business success. In the other professions we never hear of assignments made on the basis of competition; and yet the engineer is too often forced to carry into effect his plans under a system of unqualified competition that is at once destructive of good results and unfair to the contractor who will only do his work in a proper manner, and whose prices are based upon such a method of work as will insure satisfactory results to the engineer and to those for whom the work is done.

Open, unqualified competition, without reservation as to awards thereunder, is an invitation and an encouragement to the incapable, unwise, and dishonest contractor to enter into competition with the contractor who believes that capacity, experience, and honesty are

essential elements both to his success and to the success of the work that is to be carried into execution. When incapacity, inexperience, and dishonesty are joined with political pull and favoritism, the premium placed upon the dishonest execution of work is such as to forbid competition on the part of contractors who do not adopt such methods.

The duty of the engineer under such adverse conditions is plain, for he must either be in a position to demand and secure the proper execution of the work entrusted to his charge, or he must retire himself from a responsibility which is almost sure to result in the dishonest execution of his plans and designs. The engineer owes at once a duty to his employees and the public, through which, by all legitimate means, the incapable and dishonest contractor is excluded from the possibility of competing for work to be done under the engineer's direction; and if it is impracticable to accomplish such an end by not allowing this class of contractors to bid upon work, the power and authority should be inherent in the specifications to permit the exercise of a discrimination which can be used to prohibit his securing the work.

The undesirability of unqualified competition is well recognized through the manner in which individuals and many large corporations invite proposals for required work or materials; viz., by placing their proposals only in the hands of such parties as are known to be capable, experienced, and honest. In the main, our cities and the general government are the only parties who do not adopt ordinary business methods in selecting their contractors, and where the only criterion is the lowest prices offered for the work to be done or the material to be furnished.

With the United States government this method of unrestricted competition is carried to the extreme, upon the theory that the bidder's or contractor's bond establishes the responsibility of the bidder or contractor; and more attention is given to very exact compliance with instructions as to the seals and notarial attestations upon the bonds than is given to the ascertainment of the fact whether or not the bonds have any real financial value. As a result of this method the government has constantly upon its public works failing and defaulting bidders and contractors, against whom legal action is seldom taken toward the enforcement of the penalties provided in the contract. While there may be a theoretic value in the moral effect of bonds and penalties named, such effect is lost upon the irresponsible and dishonest contractor, who through a long experience has gained a valuable knowledge

of shrewd methods and tricks by which he can escape their enforcement, and upon which he fully counts when he enters into contract.

The engineer who is brought into administrative contact with the irresponsible and dishonest contractor will find himself quickly engaged in a conflict, whereby the efforts of the engineer to enforce the proper performance of the work will be met by every effort on the part of such a contractor to cheapen the work, or else to prepare the way for a successful escape from the penalties of his bond, if the work is not carried to satisfactory completion. The engineer who has gone through such experiences emerges from the conflict always a disappointed, but generally a wiser, man.

From an experience of many years the speaker has been brought to feel that many engineers are inclined to hold a responsible and conscientious contractor to a more rigid enforcement, even of non-essentials, than an incapable and dishonest contractor to matters essential to the proper performance of the work. The reason for this is that it is easier to secure exact compliance from the former than even approximate compliance from the latter; but the question arises whether the engineer has a moral or professional right to attempt to move in such matters along the line of least resistance.

Considering the engineer as the direct agent of the parties who are to pay for the work done, it may not seem unnatural for the engineer to yield to the temptation of seeking the accomplishment of his work at the least possible cost to his employer, regardless of what he knows to be the real intrinsic value of the work. Adopting this view, some engineers encourage unqualified competition to its extreme, and attempt to reduce each letting of work to the methods and principles which surround the bargain counter.

Every work is worth its absolute cost as carried into proper execution under wise, economic, and efficient administration, plus a reasonable profit to the contractor. The engineer who seeks to accomplish his work at less than what he knows to be its true value violates the fundamental principles of sound business, and thereby lends himself to the perpetration of a fraud upon the public, and an injustice to his employer and his contractor.

The engineer in responsible charge of work cannot give his unqualified time and attention to the details as they are carried out in the field; he therefore must delegate this duty of immediate supervision to his assistants or inspectors. Frequently this duty falls into more or less inexperienced hands, with the responsible engineer often far re-

moved from the work, or else not easily accessible. The value is very great to the contractor and to the work of having at all times immediately accessible a representative of the engineer who, through training and experience, is qualified in an emergency to promptly act for his superior. Wisely as plans and specifications may be prepared, they are nevertheless not inspired and inerrant, and often the unexpected and unprovided-for contingency will arise that demands correct judgment and instant action, based on experience, and a large amount of level-headedness and common sense. If at such times the representative of the engineer does not possess these qualities, both the work and the contractor will be sufferers; and these are injuries the engineer has no moral or professional right to inflict on either the work or the contractor.

Carefully as plans and specifications may be prepared for works involving much detail, they can seldom provide for every variation from the normal which may occur; and when such variations do occur, the representative of the engineer who reads his specifications as though they were his Bible, expecting to find therein provision for all things, will surely be disappointed, and the work and the contractor will as surely suffer through the inspector's ignorance and misguided faith. No more unsatisfactory representative of the engineer can be found than he who is unable to call to his aid experience and common sense in interpreting the true spirit and intention of the plans and specifications.

It follows from these conditions that among the duties which an engineer owes to his contractor is that of being represented upon the work by an assistant who has other qualifications than those of being related to somebody, or one who votes on the right side, and who may therefore enjoy the favor of the district politician. An assistant or an inspector whose employment is based upon qualifications other than his fitness for the work, and whose tenure of office is not measured only by his capacity and known honesty, is an injustice to the contractor, and a standing menace to the work upon which he is employed.

The position which the engineer holds as to his employer and his contractor is without its parallel in the other professions, and his duties which arise thereunder to these parties are at once responsible and delicate. The engineer is quite generally made the only authoritative interpreter of the true intent and meaning of the plans and specifications; and the specifications more or less definitely provide that he shall determine every question, difference, or doubt in relation to and arising from the work undertaken, and shall decide every question which may

arise relative to the execution of the contract on the part of the contractor; that his estimates shall be held as final; and that his specific conclusions and decisions shall be beyond appeal.

These broad and conclusive powers would suggest that the engineer is an arbitrator between his principal and the contractor, and clothed with the fullest power of decision and action; and yet the analogy is not complete. An arbitrator should be a disinterested party, and such the engineer is not. An arbitrator should not be under the pay or influence of either party; the engineer is manifestly under both from his An arbitrator should have no interest in the questions he is to decide; the engineer is called upon to support his interpretations of his own plans and words, and to justify his estimates and conclusions generally. The position and its duties are anomalous, and a legal authority, commenting on the situation, said: "Under these conditions the contractor's rights depend upon his good luck in having his work under the supervision of an honest and conscientious engineer; and that the employer's obligations to pay or to perform depend upon his approval and the behavior of his engineer;" and that under such conditions "the courts undertake to guarantee the contractor that the employer or his engineer shall not capriciously nor unreasonably exercise his power to defeat the contract, or deny the contractor his just and reasonable compensation." No engineer has a right to force a reasonable contractor to carry into the courts the determination of questions that arise between them; for most contractors know that after resort to such an expedient their subsequent lot would not be a happy one; and that their position thereafter would be sadly prejudiced.

The apparent arbitrary power given to the engineer in the usual specifications and engineering contract, and which are probably generally conceded by the contractor, have their limitations in practice. Numerous decisions of the courts stamp with disapproval contract stipulations which tend to bind parties, before the occurrence of an event, to the arbitrary reference of matters arising from such events to an arbitrator without judicial functions. Neither have the courts regarded with favor the attempts of parties to oust their jurisdiction through unqualified agreements for arbitration. It should not be forgotten that all agreements for arbitration are revocable by either party at any time before the decision has been rendered by the arbitrator. This further indicates the attitude of the law toward arbitration. A very recent case decided by Judge Lawrence, of the New York Supreme Court, well illustrates this subject. Under a contract it was provided

that, to prevent all disputes and litigations, it was agreed between the parties to the contract that the engineer should determine all questions of difference, and was to fix the amount and quality of the work to be done; and that the findings, estimates, and decisions of the engineer were to be final and conclusive. The court held that this provision in the contract was clearly to make the engineer the absolute and final arbiter as to all questions arising between the parties; that the provision in question, if made operative, would oust the courts of jurisdiction; and therefore it was decided as being void on the ground of being adverse to public policy. This decision is in harmony with well-established judicial maxims and conclusions, and is supported by a long line of decisions.

Through the very powers which are, of necessity, given to the engineer, he owes a duty to his contractor and to his employees to treat all situations and conditions which may arise with judicial fairness; and while entitled to insist upon the full and proper carrying into effect of the work undertaken, he should not forget that his contractor holds rights which honesty and justice demand shall receive fair recognition. To fully meet the requirements of such a situation and its duties bespeaks for the engineer the admirable traits which we believe are an accompaniment to the profession under its best development.

Contrast such a view of the duties of an engineer to his contractor or his employees with the following as set forth in a text-book intended for the use of the profession. "The engineer is in the interests of the proprietor, and receives his compensation from him. . . . He is not required nor expected to watch the contractor's business, nor to promote his interests, and any attempt to do so might render his position untenable, change the relations of the parties, and render the stipulation of his choice invalid." Again, the same writer states: "The engineer owes no duties to the contractor except what he can demand by the terms of his contracts; he is under no obligations to protect his interests or assist him in his affairs." I should be sorry indeed to believe that such a doctrine could be held by the engineer who dignifies his profession and its duties, and who believes that these duties have their foundation in honesty, intelligence, and justice.

## THE DUTY OF THE ENGINEER TO THE PUBLIC.

JOHN C. TRAUTWINE, JR.

No engineer need be told that "duty" is the ratio between the energy supplied to a machine and the useful work rendered by the machine in return. The duty of the human machine is less easily determined than is that of the steam-engine. The track laborer probably assimilates daily more foot-pounds of energy, in the shape of beef and potatoes, than does the president of the road. Means might be found for estimating the work obtained from the machine we call the laborer, but who shall estimate, in foot-pounds, the work done by the machine we call the president, and who shall say how much of this is useful to "the public"?

And who shall estimate the negative or prejudicial work done by either of these two machines? The laborer, actuated perhaps by a laudable desire to conserve his store of potential energy, slights his work on the track, and a train is wrecked; or his fellow-machine, the president, actuated by a similar motive, wheedles or bribes the directors and terrorizes the engineer, and so causes the adoption of a bad line, favorable to his individual interests, in place of a better one, to the perpetual cost of his road and of the public.

Then there is an important class of cases well typified by the trigger of a gun, or by the key controlling the electric current which explodes a charge of dynamite, where the expenditure of a very small amount of energy, sufficient to depress the key or to pull the trigger, renders kinetic a large amount of potential or stored energy. For instance, in the case of a public speaker or writer, a few foot-pounds of energy, in the form of a beef-steak, may set in commotion a vast community, and liberate forces whose effects shall go thundering down the ages.

Human machines, like others, differ in their provision for obtaining high duty. In some, indeed, the high-duty attachment is lacking, and full pressure is carried throughout the stroke. In such cases we have perhaps a large output of work in a short time,—i. e., a high power, but a small total output of work, and at a relatively large expense of stored energy; and hence a low duty.

The development of high duty is a most important branch of mechanics; and we may hope that, when something like an equal amount of attention is paid to the economy of the human machine, similarly beneficial results may be obtained.

Our subject is complicated by the fact that the human machine is its own engineer, and so is charged not only with its own protection, but also with the task of securing its own supply of fuel and of obtaining from itself a high duty. By striving for an unattainably high duty, the engineer may so cripple the machine as to impair its future efficiency; for the public displays an alarming willingness to take its machines at the word of their caretakers and to grasp from them as high a duty as they show any disposition to give.

To perform any duty to the public we must survive; and, in order to survive, we must more or less nearly fit our environment, even though that environment be such that fitness involves a higher regard for ourselves than for the public we seek to serve.

Primitive man was probably actuated solely by the divine law of self-preservation; but he early recognized the possibility of advancing the interest of the individual by subordinating it to that of the public. The mass of mankind, however, has always lagged in coming to a realizing sense of this fact, and many and clumsy have been the expedients which man has adopted in his efforts to bring his fellow-man to that sense.

The history of civilization is the history of the more or less intelligent efforts of man to adjust the relation between the individual and the public. These efforts have resulted not only in frightful abuses, but also in a vast amount of service rendered by the public to the individual. As Emerson says: "The private poor man hath cities, ships, canals, bridges built for him. He goes to the post-office, and the human race run on his errands; to the book-shop, and the human race read and write of all that happens, for him; to the court-house, and nations repair his wrongs." Truly, while we may not say, "Public, with all thy faults I love thee still," we must at least say, "Public, I owe thee a duty."

Man, we are told, is inherently wicked. And yet, give him half a chance and he is not such a bad fellow. Most of his offenses against the decalogue and against its modern amplifications are the protest of his nature against the clumsy attempts of the public to adjust his relations, attempts in which the public has often needlessly interfered with his natural tendency to follow the divine law of self-preservation. It is not the morals of man that are at fault, but his intelligence. A cry of fire in a theater awakens the enthusiastic obedience of an audience to the law of self-preservation, and its members tear and trample each other in their blind efforts to follow that law. Yet remove that urgent

distress, and those same people will sit peaceably side by side. Now, society, in spite of ages of advancement and enormous progress toward organization, still remains in a state of panic as regards provision of the necessities of life. To the great majority of mankind life is, at it has ever been, a fierce struggle for the means of existence, with a constant dread of being overcome in the struggle. Under these circumstances, the wonder is that man is as good as he is.

And on every hand the toiler sees those most prospering who ruth-lessly disregard the public good and seek only their own. The ambitious warrior, the unscrupulous financier, and the crafty politician reap the substantial prizes in the game; while the faithful teacher of infancy, than whom no one deserves higher rewards at the hands of society, may be thankful for a bare subsistence; and engineers need not be reminded that, after a lifetime of patient toil in the public service, they will be fortunate if, in closing their eyes, they can say that they owe nothing. Taking the public at its word, as we read that word, not in printed books, but in life, we should find our duty written: "Buy cheap—sell dear."

In olden times society awarded her prizes to the physically able. He who could most successfully rob his neighbor by brute force was the best fellow, and of course got away with the spoils. To-day we forbid such methods to the individual and laud them only in nations, or rather only in our own nation, whether that be the British or the American. The high individual prizes now go to those who combine shrewdness and unscrupulousness. When society so contrives that her prizes are proportional to the service rendered her, our children will wonder what we meant by the inborn depravity of man.

More than ten years ago Bellamy popularized a thought which had long been cherished by scholars, and preached by them to their limited audiences. Looking backward a few centuries, he saw the mass of mankind practically savage and disorganized; but, coming nearer to his own time, he saw on all sides increasing evidences of a tendency toward organization. With true engineering instinct, he sought the equation of the curve; and, having, as he believed, found it, he proclaimed that the combination of business interests would proceed, in geometrical progression, until, during the present century, all such interests would be merged in the hands of a coterie of men, who would practically own, not only the earth and the fullness, but also the inhabitants thereof—until some fine morning these inhabitants, awaking to their condition, would serve notice upon their owners that they would

be allowed to remain, on salary, in charge of the conduct of affairs, which, however, should thereafter be conducted in the public, not in the private, interest.

Of course, the Philistines "laughed enormous laughter and they groaned enormous groans."

"Said one: 'This is chimerical! Utopian! absurd!'
Said another: 'What a stupid life! Too dull, upon my word!'
Cried all: 'Before such things can come, you idiotic child,
You must alter human nature!'—and they all sat back and smiled."

To-day, were Bellamy alive, he himself might well stand aghast before the rapid development of his curve. Startled, at breakfast, by the news of some great aggregation of capital, we read in the evening papers that it, along with a dozen others, has been merged into a greater, which, in turn, goes into another merger while we sleep it over. I recently asked a gentleman connected with one of our large corporations whether he could tell me just who were his owners or proprietors at that time. His reply was to the effect that he was blessed if he knew. An advertising agent recently wrote me, respecting a matter which involved a canvass for advertisements: "We ought to start as early as possible, as every day large firms are combining or going into trusts, and then feeling that they do not require any advertising."

The new era is advancing upon us with such enormous strides that it is merely rational to consider what the public will be under its profoundly modified conditions, and what will be our duty to that public, rather than to spend much time in nice examination into what that duty is to-day, seeing that to-day will so soon be ancient and forgotten history.

Consider the personnel of our Club to-day; compare it with that of twenty-five years ago, and note how large a proportion of our members now are employees, either of the municipality or of giant corporations, the like of which were not dreamed of then, and which, in turn, are but puny infants compared with what those will become which are now moving in the great womb of the community.

In the new dispensation, the employers will be few, and of these few, engineers need not hope to form a large percentage; for nature rarely combines that high sense of rectitude, so essential to the engineer, with that supreme regard for No. 1 and disregard of all lower numbers, without which business mastery is practically unattainable. What, then, is to be our relation to this coming giant, and what will then be our duty to the public?

In the first place, the giant, in so far as we have been able to make his acquaintance (and he has as yet scarcely reached the nursing-bottle stage), seems to be less rapacious than we should have been justified in fearing. At least, the average employee of the great corporation of to-day certainly fares better than his brother who, fifty years ago, fell into the clutches of one of the small-fry producers of that day, and in many cases we hear of almost princely care for the comfort and well-being of such employees.

Is this altruism? Is the germ of a soul developing in the corporation after all? I believe it is; but I believe also that this is the result, not of preaching, but of evolution. The necessity of protection against himself drove man, in spite of his savage tendencies, to suppress self and to organize society. Out of this necessity, and not from the preaching of abstract morality, mankind has grown less savage. And so an enlightened self-seeking, and not unselfishness or brotherly love, on the part of the great corporation, is leading it to treat its slave and customer more nearly in accordance with the golden rule.

And when we have all become not only the employees, but also and at the same time the customers, of the great combination, will it not find it still more to its interest to conserve our welfare? Or, if it does not do so of its own accord, will not the opportunities for concerted defensive action on our part be greatly increased by our being all chattels of one institution? And will not our position be strengthened by the fact that, as there is but one employer, so also there is but one body of employees?

The private firms and small corporations of the past régime quite commonly indulged in all manner of expedients to delay, or even to avoid, payment of just and acknowledged obligations; whereas no one, having such a claim against one of our great modern corporations, gives himself the slightest concern about it. Payment comes in due course, as surely as the sun rises, for the corporation finds that such action pays—that the profit to be derived from worrying its creditors will not pay the cost of the process. Here we have another illustration of the fact that man, after all, is a pretty good fellow. While all business was beset with pitfalls, and the whole operation resembled a Donnybrook Fair, the conditions were such as to develop, and to render hereditary, a tendency to squeeze and fleece our fellow-men by every possible method; but the great corporation, finding an assured and profitable business, can and does afford to rise above these petty resources of the old-time business man.

And so, it would seem, is being brought to pass the saying which was written: "The wrath of man shall praise Thee." What all the preaching of nineteen centuries and all the blood of the martyrs could not bring about, is being brought about by—man's selfishness. It has been well said that the undevout astronomer is mad; but what shall we say of him who observes this masterpiece of the divine cunning and remains undevout? Verily, a Machiavelli or a ward leader may well remove his hat in profound respect for superior art, as he sees the great Engineer of the Universe thus "forging, through swart arms of offense, the silver seat of innocence."

Emerson has well said that the men whom we regard as great—the Cæsars, the Napoleons, the Shakespeares, the Wanamakers, the Morgans, the Quays—are simply those who have been able to discern the direction of the human current of their day, and have put themselves in line with it, like a well-placed pipe or culvert, and not athwart the stream.

To-day we go bungling about, with but imperfect means for ascertaining the direction of the current, and perhaps still less perfect facilities for placing ourselves in line with it when found, owing to the equally ill-directed and conflicting efforts of our fellow-pipes to do the same thing. The result is a tangled mass of pipelets, thrown together pell-mell, a vast majority of them more or less nearly square across the stream and getting no water to speak of, but only heaping up a vast head of pressure, which sends the stream in millions a month through the Carnegie and a few other pipes which, by knack or by luck, have secured both large and smooth bore and axial location, while it breaks and starves the little pipes that get wedged in crosswise between the larger ones.

Fortunately, the very existence of these great pipes, in axial positions, though cruelly hard upon those that get crushed in the shuffle, is of vast service to the mass as a whole, and so, eventually, to those small pipes that succeed in surviving the process of adjustment; for the success of the great pipes not only advertises unmistakably to all the direction of the current, but renders it increasingly difficult to get into false positions. It thus facilitates the attainment of a proper adjustment, except to those who, from belonging to a past order of things, find themselves hopelessly anchored fast in crosswise positions.

Under the coming dispensation our "public" will be simply our fellow-employees and fellow-customers of the great combination, and our duty toward them will be determined, and posted up for our information, by our masters and owners, who will have become our government and our God.

For some years, however, we shall no doubt maintain the fictions of a "public," of public business and of public officers. What of the duty of these public officers or servants? Manifestly no one answer can be given covering all such cases; for in the large majority of these cases the public engineer will be, as he is to-day, a mere subordinate to a servant in higher rank, who will prescribe his duty for him; but, in the official lives of public servants of the higher grades there must arise daily questionings as to what the interest of the public demands, not merely as to technical matters, where the answer will depend upon mental processes, but as to questions of what we call "morals."

Contrary to the fond imaginings of our childhood, the business and political world is not a Kindergarten, where all are lovingly co-operating, with an eye single to the public good; but a menagerie, where a mob of imperfectly civilized animals returns daily to the struggle for existence, and where the trail of the serpent of self-interest is over it all. Practically all have harkened to the still small voice of Society as she whispers "Look out for No. 1," while she shouts "Obey the law," and they would be but childish and would deserve the consequences if they ignored her whispered warning.

How does his duty require the conscientious public engineer to conduct himself? Shall he plant himself squarely amid-stream, say what he thinks, and go down before the current, or shall he better serve his day and generation by being at least some things to some men? Shall he set his arms akimbo, and strive for an unattainable ideal, refusing to rest satisfied with any compromise, or shall he go with this current and with that, adjusting his shape and dimensions to this and to that tendency, hoping thereby the more surely to reach his goal—the public good?

For instance, a government engineer, in charge of the harbor work affecting a large city, plans and conducts a certain line of improvement. The Mayor of the city, a man without special training in harbor improvement, but of demonstrated ability in certain lines, and quite remarkable for his keen scent for public abuses, enters the professional field, and announces that he will veto any appropriation that does not in a certain respect reverse the engineer's method of procedure. Those of us who, as engineers, know something of our limitations, will refrain from taking sides upon a question wherein experts differ; but his Honor's criticism appeals to what the newspapers call "the common sense of the public,"

and the City Councils continually and with loud voice proclaim their absolute subjugation to his authority. Evidently, persistence, on the engineer's part, means diminution of appropriations.

Now, what is the engineer's duty? He modestly disclaims authorship of the remark that his Honor "could not understand the elements of harbor improvement, even though they were explained to him in words of one syllable," and yet he must know that the remark applies to the overwhelming majority which he finds arrayed against him, including the newspapers, whose harbor experts naturally side with "the common sense of the public." Shall he bow to the ignorant mob, recant his alleged heresies, and thus secure city and state appropriations for the work he has at heart, or shall he stand to what he believes to be technically right, and so deprive the work of those appropriations?

For us to attempt to answer this question for the engineer would be, if possible, even more foolhardy than for us, without special training, to dictate to him where he should dump his dredged material. The engineer must wrestle with this question for himself. He must decide whether the public interest will suffer most by following a plan which he disapproves, or by depriving it of needed means.

Instinctively we applaud the man who stems the current, even though he goes down before it; but it is by no means certain that we are right in so doing. May he not properly wink at popular prejudice and ignorance, and apparently travel along with them for a while, if thereby he may in the end more certainly guide matters into the proper channel? With his head above the clouds, may he not plant his feet upon the earth?

The answer must depend, not only upon the abstract merits of each case, but largely upon the man himself and upon his organism. Not every man has the moral courage to take the one course, and so not every man has the dramatic talent to follow the other. Actors, like some other professionals, should have good memories; and many an engineer, if he were to attempt to trim his sails to the fickle gusts of public and political favor, hoping thereby to bring his vessel the more safely into port, would assuredly capsize it and would find himself the proper laughing-stock of those whom he strove to serve.

But for every man there is a duty which no corporation can compel or control and for which no money can pay. It lies within the power of every man, whether engineer or not, to be of greater or of less service to his day and generation; to contribute more or less to the general intelligence and enlightenment, and thus to do more or less to bring about that millennium for which we are all yearning. He may do this partly perhaps and occasionally by precept, always and chiefly by the life. Precept may be administered from time to time, as occasion offers, but is seldom accepted and still more seldom followed. The example of a right life is a continuous performance, and the audience is always in its seats.

Sordid as we are, we are not wholly so. All is not done for pay. The young engineer who ran his elevator while the building was falling, and whom we may well be proud to claim as a member of our profession, knew that his pay did not depend upon his saving the last three women who still remained aloft.

I follow the example of a good friend in closing with a quotation from Ruskin:

"And so with all other brave and rightly trained men. Their work is first, their fee second—very important always, but still second. with some people just as certainly the fee is first and the work second, as with brave people the work is first and the fee second. And this is no small distinction. It is the whole distinction in a man; distinction between life and death in him, between Heaven and Hell for him. cannot serve two masters; you must serve one or the other. work is first with you, and your fee second, work is your master, and the Lord of Work, who is God. But if your fee is first with you, and your work second, fee is your master and the Lord of Fee, who is the Devil; and not the Devil, but the lowest of devils, the 'least erected fiend that fell.' So then you have it in brief term; work first, you are the God's servant; fee first, you are the fiend's. And it makes a difference now and ever, believe me, whether you serve Him who has on His vesture and thigh written, King of Kings, and whose service is perfect freedom, or him on whose vesture and thigh the name is written, Slave of Slaves, and whose service is perfect slavery."

#### GENERAL DISCUSSION.

James Christie.—By following the advice of Polonius to his son, "To thine own self be true, thou canst not then be false to any man," the duties of the engineer to his clients or employers are disclosed when we define his duty to himself and to his profession.

No rules can be formulated exclusively for the engineering profession but that, in a general sense, would apply to all professions and trades and to humanity at large.

In the case of the legal profession, it is frequently asserted that the duty of the

attorney is to stand by his client, right or wrong. As rigidly interpreted this would imply that he might be called upon to defend a cause that could not be justified by any device of the casuist.

Enterprises of a stock jobbing character are not unknown, where an appeal is made to the public to participate in an investment, built up on a slender foundation of facts, buoyed and sustained on unstable elements, and all bearing the indorsement of engineers well qualified to judge of the merits of the enterprise.

Instances of this kind have occurred most frequently in the mining industries, but instances of the same character, and of questionable integrity, have not been unknown in the metallurgical world. It is quite true that it may be frequently difficult to decide on the exact merits of enterprises of the kind referred to. Quite often the result can only be known after much labor and money have been expended, and most of us, according to the old adage, "try to believe that which we wish to be true."

When, however, ordinary investigation proves that the object proposed is not sincere, and is largely intended to enrich the promoters at the expense of the public, then no engineer is justified in lending his name to the imposition.

I desire to make a few observations on the duties of the engineer inspector to his clients or employers. It frequently happens that the inspector is a young man, fresh from college, possessing a good book education, but is limited in his experience of workmen and materials. He probably has the impression that in order to serve his employer faithfully and be worth his salary he must be constant and insistent in his criticisms. His fault-finding habit grows upon him, until he is a positive obstruction to the successful prosecution of the work in view. I can recall many instances where such a man, with the very best intentions, has succeeded in making himself objectionable to the contractor, without winning the support of his employer. In extreme cases, the hypercritical inspector has had to be removed from the work, in order to permit of its progress.

On the other hand, the observant and conscientious man will point out faults when good cause exists, avoiding interference for unimportant trifles. His criticisms, when analyzed, prove to be well founded, always grasping the substance without chasing the shadow. This man gains the good-will of his employer, as well as of the contractor and his employees, and success is bound to attend his efforts.

WM. COPELAND FURBER.—I want to say a word regarding the relation of the engineer to the contractor. There is a prevalent belief in the minds of many engineers and architects, I may say, and particularly among the young ones, that they hold by divine right a superior position in all respects to the contractor; that they are not subject to the same laws which govern the contractor, and that they are the law-givers and the contractor is the law-obeyer. This belief leads the engineer or the architect into a very false position, often a very arrogant position, and in most instances into a very wrong position. All the rights the engineer has over the contractor are those delegated to him by the terms of the contract.

It is unfortunately true that the rank and file of contractors in many lines of work in the past have frequently risen from illiterate workmen, men of force and aggressiveness, but with little acquaintance with scholarship; and this condition, prevailing so generally, and the engineer or the architect having, or having pretense to, education, and generally occupying a socially superior position, has

unconsciously perhaps led to the growth of the tradition in the minds of engineers that the engineer can do no wrong, and that his interpretation of a plan or specification is, and as a matter of fact must be, right. It is true that some one must be in charge of the work, whose decision should be final, subject, however, to appeal in proof of error, but this clause usually embodied in the specification and contract is interpreted by some men in charge of work to mean that their decision is right even if in violation of the specification.

The fact also that contractors have been in many instances men of but little sense of responsibility and honor, and ready to take advantage of every quibble, has led to the tightening of the contract and in many instances to an enforced waiving on the part of the contractor of his common rights. However, this is a temporary condition, and when the business, social, and scholarly standing of the contractor improves, as it will by the advent of younger men of superior education, the engineer must give way to a full recognition of his rights.

The relation of the engineer to his drawings and specifications, and to the client and the contractor, is a delicate one and a very difficult one, and unless he is constantly on his guard, he may unwittingly do wrong, and injustice may be done to one of the parties concerned. Therefore the temperament of the engineer must be a judicial one.

It is a curious position, and contrary to all principles of judicial procedure, that the drawer of an instrument should also be its interpreter, and that his interpretation should be without appeal. For while it is true that a man may know best what he meant to say by his own words, yet the writing loses this personal quality when it becomes the medium of contract. Words have a specific value to the scholar and a general value to the layman, and a wide difference may exist between the two values. The aim, therefore, in writing a specification should be to avoid the use of words or manner of using words from which two interpretations can be fairly drawn.

It is not an unheard-of custom of some men to draw a specification in such a vague way that the contractor is misled in bidding; and a subsequent performance wholly beyond the usual is exacted. It requires no extended argument to prove this method peculiarly dishonest.

The drawings and the specification should be so drawn that every thing which is to be done or called for is fully set forth in as simple a manner as possible. Some architects claim that if the drawings are complete to the details the bids run high; and while this may be true with ignorant bidders, yet a determination on the part of the designers not to practise evasion in this respect would soon establish a standard, and competition would soon correct high bidding. This method of evasion, however, has the opposite effect of raising the level of all bids eventually by a sum sufficient to cover the uncertainties. The man to whom the position of arbiter is given by the contract should remember that his decisions are binding upon the contractor and the owner only just so long as they are fair; the moment his decision is dishonest, the principles of equity relieve both parties to the contract, and the arbiter's award is thrown aside.

The engineer's position must be an impartial one, and he should know neither fear nor favor; he has no right to give the contractors that which the owner will pay for, neither has he the right to give the owner anything which belongs to the contractor. If he fails in any degree to fulfil the trust reposed in him to the utter-

most extent, he causes injustice to one or both parties, and perhaps to both. He injures his own character, and finally lessens the respect in which the engineer should be held, and thereby brings injury and distrust upon men in the same calling whose aims and practice may be on the highest plane of fair dealing.

A. FALKENAU.—The relation of the engineer to the lawyer has various aspects. Judging from my own experience in the past, having a number of times been called as expert witness, I would reverse the dictum of the prominent British barrister who stated that the most trying witness is the engineer. Of all the professional men I have come in contact with, when dealing with engineering subjects the lawyers are the most unreasonable and thoughtlessly stubborn. seem to believe that the same method of contradiction and browbeating which they apply to questions of mere memory is applicable to matters depending upon well-known physical laws. Unfortunately, there are some engineers—but they are very few—who will dishonor the profession and stultify themselves in the attempt to serve the side which calls them. When an engineer is asked to testify professionally in a case, a serious duty lies before him, and it appears to me that there is but one way for him to proceed; if upon investigation he finds he cannot give support to the side for which he is called to testify, he should frankly say so and decline to serve. Even when the engineer feels himself upon perfectly solid ground, in testifying he has a difficult task to so express himself as to make himself understood by judge, lawyer, and jury. One great difficulty with lawyers in general is their entire lack of training in the science of physics, and relying upon an equal ignorance on the part of the jury, they believe they have an easy task to demolish any apparent conclusion by their cross-questioning. As an illustration of this, I would cite a case in which I was called as expert for the owners of a mine in which a man was killed while riding in a bucket down a shaft. shown that the engineer had lost control of the brake of the hoisting drum, due to a half-inch rod breaking, which connected the hand lever with some other levers in the brake mechanism. The attorney for the opposing side put the question, "Would you trust yourself in a bucket weighing several thousand pounds held by a half-inch rod?" I stated that I could not answer the question in that form, but the attorney insisted again that I must answer yes or no to the question. my continued refusal, he requested the court to demand an answer. however, permitted me to explain that to answer the question it would be necessary first to know just what position the half-inch rod occupied in the entire mechanism, as the leverages could be so arranged that a child could control the brake by holding a thread. The court supported my position, and the attorney, whom I personally knew well, dismissed me in disgust, but still failed to understand the point. He later on said to me that we engineers are the most unreasonable and obstreperous witnesses the lawyers have to deal with, as we will not answer the simplest questions such as he had put to me. I answered that the adage that a fool can ask more questions in five minutes than a wise man can answer in ten years was one that lawyers might well consider in dealing with engineers. The truth is that lawyers are out of their proper sphere when they deal with the ques-There is no doubt that in the legal field there is need for tions of engineering. some other method of settling questions of engineering science than by the argument of lawyers and conclusions of a still more ignorant jury. Questions of this nature might be referred to a board of reputable engineers. I believe that this has been done in a few instances. If this were more frequently the case, it would open a good field in which the abilities of the engineer could be brought into play.

The suggestion of the first speaker, Professor Marburg, that the education of the engineer should be broader, that he should not seek merely technical education, is well worth consideration. The engineer ought to seek as broad an education as possible, for no matter what branch of engineering he may enter, it brings him in contact with fields which lie outside of engineering proper. business field, for instance, of the financial side of engineering, the average engineer has little conception of. I am reminded of Professor Coleman Sellers' statement of what a true engineer is. He said that the average engineer thought it was the most thorough and scientific accomplishment of the work necessary to solve a given problem. At first sight this would seem a complete definition. added, however, "Give me plenty of time and plenty of money and I will solve almost any engineering problem. True engineering requires the accomplishment of the end in view within reasonable financial limits." This proper balance between the financial and purely scientific side of engineering work is a most important point for the young engineer to consider as he goes out into life. that some engineering schools are now introducing courses dealing with economic questions, such as cost, the history of trade, relations of labor and capital, etc. The modern great combinations would seem at first sight to relieve the engineer from contact with business or financial questions still more than in the past, but I believe that the subdivision of labor will be on a broader basis than heretofore. and certain business and financial questions will have to be settled in every department, instead of by the heads of the establishment as heretofore.

It is certainly much to be desired that the standard set by the second speaker in dealing with the relation of the supervising engineer to the contractor should be adopted more generally. It is unfortunately the rule to consider more the limits of legal obligation than the patent moral obligation in a contract. I doubt whether the average financial man who controls a large undertaking would side with Mr. Schermerhorn in the view that it ought to be the engineer's duty not only to see to the execution of the work according to the letter of the contract, but that he should guard the contractor's legitimate interests under it. On the contrary, as a rule the engineer is expected to interpret, where possible, every clause to the disadvantage of the contractor, and as a consequence a vast amount of injustice is done.

A. H. Holcombe.—As one of the younger engineers, I think the thought brought out by Professor Marburg is the most important one—that an engineer should be a true gentleman. If we are such, I am sure we will be more useful to our employers; we will receive better service from our employees; we will be of more use to the public, and we will raise the acknowledged standard of our profession. As Mr. Birkinbine has said, we are members of the best and noblest profession. If this is so, I am sure we should all recognize our duty and be true gentlemen in the broadest sense. Several years ago I saw a cartoon published in "Life" which made a great impression on me and which carries its own moral. The scene was some work of construction. In the background was an engineer, near his surveying instrument, jumping up and down and berating his assistant, probably for some dumbness which engineers sometimes cannot understand unless they have been in a lowly position. In the foreground was an elderly man visit-

ing the work of construction. Near him was a laborer. The cartoon was headed "What's in a Name?" The visitor said to the laborer: "Who is that man howling and cursing at everybody?" The laborer said: "Sure, sir, he's the civil engineer." [Laughter.]

Max Livingston.—Speaking about the necessity of educating engineers, I think it is very important to have the public understand what the engineer has to do. The trouble is that a number of men in very high positions, having worked themselves up from, well, I might say, the pick and shovel, look down on the trained civil and mechanical engineers as a certain political element looks down upon the "literary fellers." An instance of this kind came to my notice within the last few months. A friend of mine, whom I thought rather deficient in mathematics, who yet wanted to be a civil engineer, asked me whether I could not help him to secure a position after he had finished his course at the University. I told him he should first try to get through and afterward I would see what could be About that time I met an acquaintance holding a very high posidone for him. tion in an engineering establishment, and I mentioned this young man and his possible shortcomings. To my utter astonishment the man said: "What difference does that make? I can hire the best mathematicians at two-fifty a day." Well, I felt inclined not to encourage my young friend in prosecuting his studies, as the outlook did not seem very promising. Another thing; some gentleman, I think it was Professor Marburg, spoke about the attainments and achievements of engineers as compared with other professions. The difficulty, I think, lies in the fact that with engineers two and two are four, while with many of the other professions two and two are often five. That is, the public cannot see when these other men make mistakes, as they can be hushed up and remain secrets forever, whereas errors of the engineering profession cannot escape public criticism, for if a bridge should fall, a dam break, or the foundations of a house give way, the whole world finds it out and is only too ready to condemn the engineer.

# THE PRACTICAL BUILDING OF LOWLAND PROTECTIONS.\*

PERCY H. WILSON.

#### Read September 21, 1901.

Bordering the tidal rivers in various parts of our country, and exposed only at low water, are many million acres of marsh-land, covered at high tide by water, and growing aquatic plants and a variety of reeds. The land, when reclaimed through the building of banks to exclude the tide, makes, without exception, the most valuable on the farm; three crops per year being the average, and this without artificial means used by farmers to force their crops.

The building and maintenance of these banks, or lowland protections, have become a most important consideration for the farmer, and, naturally, there have come into use many methods of accomplishing the result. Mud, usually the most convenient material, forms an important detail in all these methods, many revetments being built of that alone. There are cases, however, where mud will not stand alone, and three general methods of protection are mainly used, viz.: (1) Stone, without cement, laid as riprap; (2) Timber work; (3) Stone with cement, or concrete.

It is my purpose to give a description of the practical building of banks with their protections, accompanied by sketches showing detailed plans of representative constructions in each class, noting briefly the difficulties encountered in each form of construction, and the advantages and disadvantages of each.

## MUD REVETMENTS.

History.—The first people to develop the building of large systems of mud revetments were the Dutch, and they, from necessity, are at present probably the most experienced, although we, with our great expanse of lowlands bordering on the Mississippi, are not far behind them

<sup>\*</sup>This paper is an abstract from a thesis presented to the Civil Engineering Department of the University of Pennsylvania for the degree of C. E.

either in experience or skill. On our own river (the Delaware) we have much meadow-land exposed to tidal action, and our engineers have become quite expert in the handling of the problems of protection.

Past and Present Methods of Building.—Originally all the banks were built entirely by hand, the men working on the marsh at low water only. The site of the bank was selected well back from the water-way, leaving fifty or a hundred feet "berm." Then a ditch was laid off back of the site of the bank and dug, the material being cast up on the river side of the ditch forming the bank (Fig. 1). Thus with one handling of material the bank was built, and a drainage ditch back of the bank dug; a thing in those days considered as important as the bank itself. The finished product is well shown by the sketch, including the almost universal accompaniment to this form of bank, the muskrat hole.

These old "mud men," as they were called, were heroic workers, and deserve their meed of praise. They are, with the possible exception of ship carpenters, the crankiest set of men I have ever known. But

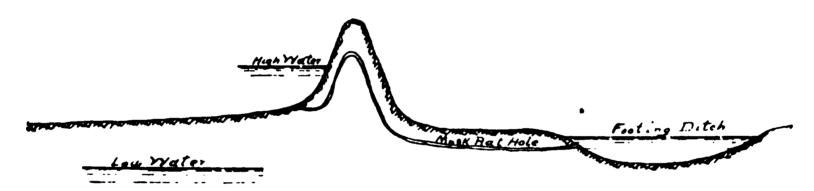



FIG. 1.—COMMON TYPE OF HAND-MADE BANK.

what work they did! Ten hours a day, with a half hour's rest at noon, they stood waist deep in mud and water, casting up neatly cut squares of mud, often at least a distance of ten feet. Several years ago a number of these squares were weighed, and they averaged one hundred pounds each, their weight not varying ten pounds. A skilled man handles from ten to twelve yards of mud per day.

It has gradually come to be recognized that the "backing" or "footing" ditch, as it is called, is not only a disadvantage to a bank, but a detriment. A musk-rat will not dig his hole unless he can find water at both ends of it, and filling up the "footing" ditches has greatly decreased the nuisance. Many banks are gutted by these animals, being dangerous to walk on in places, wash-outs occurring frequently, and where not immediately attended to, widening into breaches.

Out of these various troubles has come the modern way of building a bank—viz., by the help of the dredging machine.

Details of Construction.—The majority of meadows which are of any account have these hand-made banks, and at present the principal work is to top them up and stop the breaches. A dredge is taken to within about fifteen feet of the foot of the old bank and material cast over behind it, raising and broadening it and also filling in the "footing" ditch (Fig. 2). This material is put on by instalments, time being allowed between each for the material to dry out. The first time, only enough material is taken out to allow the machine to work four or five hours on each tide; the next time, as much mud is put on as will stand, without too much slipping; and the third time, only enough to piece out the bank to the required dimensions. Where the mud slips so badly that all control is lost, a light bank is sometimes erected at the back, about where the proposed slope strikes the meadow. This helps pile up and prevents much loss of material.

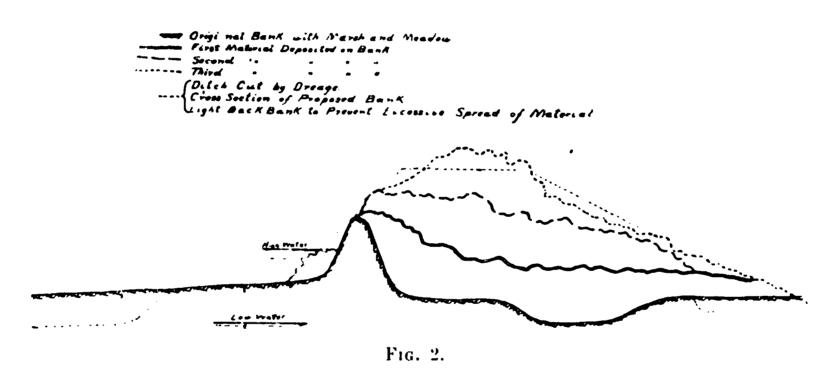


It requires great skill and years of experience to say just how much material a bank will stand, and it very often occurs that too much is piled in one place, and either the bank or the contractor (usually both) suffers in consequence. In building the bank the following problems must be solved:

- 1. To economically operate the dredge, enough material must be excavated to allow it to work at least five hours on each tide.
  - 2. This material must be so placed as to prevent too much loss.
- 3. The weight of the material must be so distributed as to prevent caving of the old bank.

These three conditions are sometimes extremely difficult to harmonize, and one is, at times, sacrificed to the other. When impossible to reconcile cases 1 and 2, a compromise is effected. Case 3 is never com-

promised. When the weight of the deposited material becomes greater than the bearing power of the bank, it is the result of a mistake, ignorance, or want of judgment; all equally disastrous. There are three general methods in which these slips occur, viz.:

1. The material caving from the center of the old bank and sliding into the cut (Fig. 3): This is due either to the undermining of the bank (i. e., digging too close or too deep in front) or the weight of material placed upon it. These slides are most difficult to guard against, as they rarely occur while the machine is actually in operation. The mud is thrown upon the bank at or about high water, and the bank usually stands while it has this pressure to hold it. When the tide falls and this pressure is withdrawn, the bank breaks. When such a slide occurs,

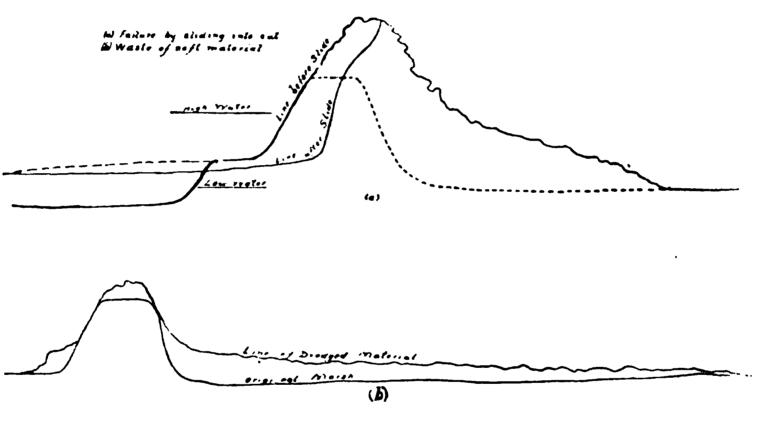

F10. 3.

the place is left for a time; then material is placed on either side of the broken portion and it is carefully built up by hand, a slow and tedious process, but reasonably sure. Even then it is not finished at once, but first built above high water, if the bottom does not again commence to slip, and completed when the first material has become set.


2. The material sliding down the back of the bank and out into the meadow beyond the point where the line of the slope hits the meadow (Fig. 3): This in no way endangers the bank, but is of great expense to the contractor, the material being in addition to that provided for by the specifications, and hence not paid for. When these slips occur, the dredge has to make one more trip than would otherwise be necessary to complete the work.

3. The meadow is at times so soft that the material placed upon it settles down in places and pushes the original marsh into the dredged cut. This form of failure is, of all, the most difficult to deal with. The only way such material can be handled is to put a few buckets up at a time, and if more material must of necessity be excavated in order to economically operate the dredge, it must be cast upon the other side of the cut and not upon the site of the bank. At times, when a slide of this kind occurs, the bottom of the creek will rise enough to ground the dredge, which before the slip had ample water in which to float.

When banks are first built, it requires great skill to pile up the material in such a way as to insure its not slipping back into the cut. first bucket of material is placed nearest the line of the cut, the bucket being allowed to drop hard into the marsh; thus part of the new material is buried in the marsh, which helps to keep this material from slipping (Fig. 4). The boom of the dredge, working practically in an arc of a circle, places each succeeding bucket of mud further around and back, until the limit of swing is reached, where as much material is placed as will stand. When the dredge moves ahead, the first bucket goes on the same line, and next to the first bucket dug on the preceding move. The latest material dug is the most slippery, and even the short time elapsing between moves suffices for the one bucket placed on the toeline of the bank to become set, thus causing the material to slide away from, instead of toward, the cut. In very soft material this method is sometimes insufficient, and a false toe is placed, such as a log, with upright strips driven into the mud to prevent slipping. A small pile of stones is sometimes used in the same way; at times a mattress of brush, straw, or other material is made and mud deposited on top of it.

Referring to figure 4, the three letters represent the three moves of the dredge and the corresponding material placed on the bank at that move. It must be understood that only the first seven buckets dug are shown; usually about fourteen are put in place, the other seven as near to the position of bucket No. 7 in each move as possible, the material pushing back at this point to the foot of the bank. Nor will the material remain in the position shown, but will slide and mash down until it reaches the probable line of slide.

When all the material is placed upon the bank, it should be carefully faced and leveled on top, and it is a good practice to level the back face; the slopes most generally used are 1:1 for the face and 1:2 for the back, with various heights and widths on top. This leveling is shovel work, and should be commenced about three days after the material is cast

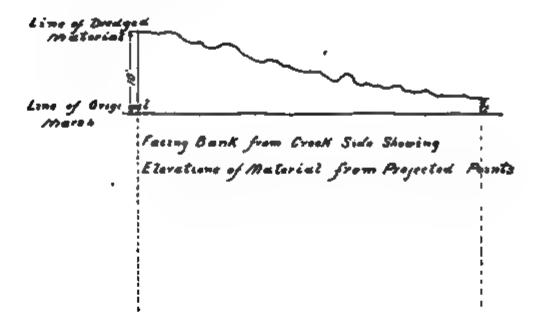

up by the dredge; this time suffices to allow the material to dry enough to give the men good footing and does not allow the material to become sun-baked and hard. Again, when the material is damp, it makes a much better bond with that next it, and forms, after several rains, a good hard bank. If too dry, it at times becomes necessary to use a pick, thus increasing the cost of leveling.

The best practice is then to sow the bank carefully with grass seed and to cultivate a sod; this prevents the mud from washing out at times of rain or freshet, or, in other words, forms a natural protection for the bank.

Another common practice is to plant willow trees along the foot of a bank, that their roots may form a natural protection and tend to hold the bank together. The advisability of this practice is questionable. While it is a protection to a certain extent, yet washouts occur along the roots of these trees, and if many are planted, it is absolutely impossible to cut out and repair musk-rat holes or washouts, owing to the millions of roots woven and interwoven throughout the bank.

The Closing of Breaches.—A breach usually occurs in the weakest place in the bank—viz., where there is little good material to be had and the bank is small, or where the material of which the bank is made is thoroughly unfitted for use, and these very conditions operate seriously against the stopping of them. The difficulty can be easily conceived when two hundred acres, more or less, are alternately covered with water and drained each change of tide. This water flowing through the breach produces a terrific current, which does not often wear the breach wide, but quite deep (usually to within five feet of the depth of the river-bed or to hard bottom).

These breaches must practically be stopped on one tide. Usually work is started just before low water, and the endeavor ismade to keep the bank above the tide as it rises. If the tide once gets over the bank, the whole of your mud is carried in on the meadow, your work is thrown away, and, as a rule, the breach is in worse condition than before. Again, you have wasted all the material put into it, and there usually being a scarcity, this is the most serious loss. Much more material is required in a breach than on an ordinary bank, because the "green" mud must stand, on one tide, the whole pressure of the water.

Very few breaches can be closed by a dredging machine alone. Several methods are in vogue at present, and experience alone can dictate the place in which any one system can be successfully used. In many

breaches several methods or a combination are tried before success rewards the work. The four methods mostly used are:

- (1) Sand-bags; (2) Stone; (3) Sheet piling; (4) The use of wrecks.
- 1. This method is usually very successful. The bags, weighing from five to six hundred pounds each when filled, it is difficult for even the strongest tide to move them from place, and the sand, being confined, cannot wash away piecemeal. The bags are piled as nearly as possible in layers, alternating in direction. When the breach is once stopped, these bags are thoroughly covered with dredged material to avoid any possible escape of the material when the bags decay.
- 2. Stone is very successfully used in smaller breaches, and has the advantage of being quickly and easily handled. Two good-sized parallel walls are built and dredged material deposited between the two, the object of the stone being to keep the mud from slipping out at the bottom when weight is placed above. This is not successful in large breaches, and on several occasions, upon looking for an unfinished wall of stone after the worst of a tide was past, nothing has been found, the stone having been picked up by the tide and distributed over the meadow.
- 3. Pile work is least efficient of any method, and can be used to advantage only on the smallest breaches. Sand-bags and stone start at the bottom and build up, keeping about the same elevation across the breach; pile work starts at one end and gradually narrows the breach, and, the same volume of water trying to get through a small space, the end piles are undermined, the wood construction goes out, and the breach is deeper than before. Sometimes the water simply eats its way under the construction, deepening the breach and washing out the pile work. These modes of failure are absolutely impossible with the first two methods, while the third method rather courts than avoids them.
- 4. At times an old canal-boat or lighter is sunk in the breach. This is a very effective way of stopping it, as the lighter when filled with mud does not easily move from one place to another, nor does the mud wash out, being confined in a strong wooden structure like a coffer-dam.

At times breaches become of such dimensions that it is an almost hopeless task to start with one of the above methods. It often occurs that the deepest water is not on a line with the original bank, but inside of it, caused usually by use of material in efforts to stop the break by horseshoeing and progressively moving the material further back on the meadow (Fig. 5). The sketch shows a breach at first of rather small dimensions, becoming progressively larger and deeper owing to

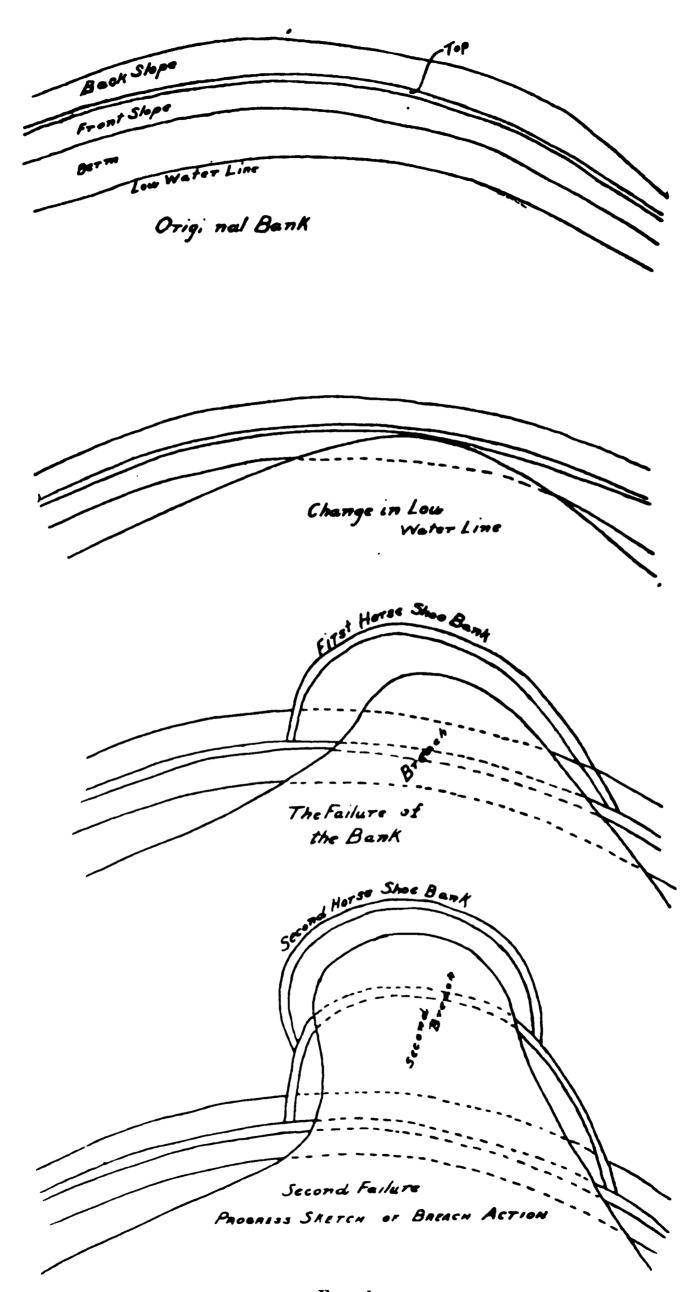


Fig. 5.

mishandling. In such a case the heaviest material available is put in scows, towed to the site of the work, and dumped in and around the break both in the meadow and the creek outside the line of bank. The endeavor is thus made to form a new bottom of hard material (coarse gravel is the best, sand being worthless); when this is accomplished, one of the above methods is resorted to and the breach closed.

It is rare that attempts at any of these four methods are made on a line with the original bank, but horseshoes are made, the inside bank going in far enough to avoid the rush of water through the breach. This is the surest and cheapest way; but when the water is shut off, the original bank should be restored and the horseshoe bank not depended

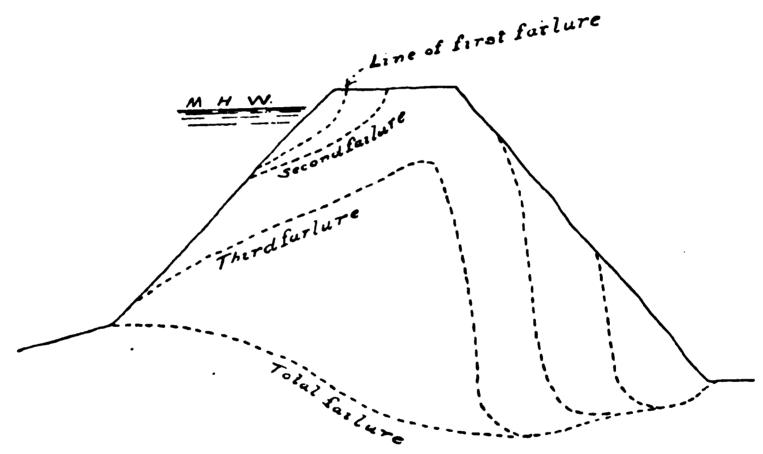


FIG. 6.—THE WEARING OF A BANK DUE TO HIGH TIDES.

upon. Unfortunately, this is very rarely done, the bank managers usually resting on their laurels as soon as the water is shut off; the result is that the next time the bank fails, you have to go further back into the meadow, thus cutting off more acreage as well as making a greater length of bank to care for. One breach near Philadelphia has seven horseshoe banks built, one behind the other; I might add, the breach is not stopped yet. The only way possible to stop this breach is to furnish, from an outside source, the material to fill the hole made by successive attempts to stop the breach. This material could easily be scowed in, and on the bottom thus formed the breach could be stopped by one of the methods above mentioned.

Failure.—If the face of a bank is kept in good condition and there is

an ample slope on the back, failure rarely or never occurs. The musk-rat holes should be dug out at least once a year and the hole packed with green mud. The face of a bank yields to the wearing action of the tides at about high-water mark, or a little below, a hollow being formed, and the earth above falls of its own weight, thus lessening the width on top (Fig. 6). The greatest wearing action, arising from the water flowing over the top of the bank, occurs in the back, and causes serious damage only when the back slope is very sharp; then the fall of the water washes away the bottom of the slope and wears the bank through very rapidly.

The tendency of a musk-rat hole is to loosen the material in the bank, and it is a well-known fact that the places where these holes abound wash first.

Selecting the Site of a Bank.—Naturally, in selecting a site the land-owner wishes as much land inclosed as possible, and the engineer conforms as nearly as is practicable to this idea. Again, nearly every farmer wants a "straight bank," i. e., the same distance back from the creek throughout the entire length. This is a mistaken idea. A bank is built not only with the idea of shutting off the water, thus permitting the cultivation of the land, but the kind of a bank should be built to insure future cheapness in maintenance; such a site should be selected as will insure the future stability of the bank (Fig. 7).

A creek or river bends in and out, and along the same creek many different forms of bank and protection should rightfully be used. the straight reaches, the bank should be about fifteen feet back from the low-water line, and will probably need no artificial protection. This applies equally well to the bank on the convex side of the creek. On the concave side, where the tide runs close under the bank, some marsh should be left; then the dredged cut made; then fifteen feet of marsh, and, finally, the bank. This leaves enough berm to protect the bank from any immediate wear. The ends of the dredged cut should be shut off when the bank is completed, in order to prevent the tide from flowing through the cut, and thus endangering the bank. straight reaches and on the concave side of turns the dredged cut fills very rapidly, a cut of five feet depth being practically obliterated in the course of five years. Even the distance of the bank back from the creek above mentioned does not necessarily insure the bank's safety, and usually some protection must be added.

Materials of Construction.—Before leaving this subject, it will be well to say a word as to the efficiency of various materials for bank building.

As a rule, in creeks the materials available are mud, clay, sand, and gravel, and the material used usually depends upon that nearest the site of the work.

Mud: Good clean marsh mud is by far the best material of which to construct banks. It packs well, is comparatively easy to handle, gets a sod quickly, and, when dry, does not powder, but forms a well-cemented mass. It is also the lowest material in point of cost.

Clay: Clay is of some value for puddling, forming a most impenetrable mass, but is also subject to the washing effect of rains and tide. Used with mud as a protection, it forms a valuable adjunct; but alone, is of little value. The cost is also prohibitive in many cases, it costing three times as much to handle clay as mud.

Sand: Sand is of value when confined (in bags, as explained above); but alone, is the worst of materials. It washes rapidly, never forms a compact mass, and I have known pretty good-sized banks to literally blow away when the sand becomes dried out.

Gravel: Gravel is a fair material when dry; but when wet, is hard to handle. A small quantity of it getting into the bucket at one time, there is room for a large amount of water, and the gravel, when released, is immediately washed to the bottom of the bank. This is a serious drawback from the contractor's point of view, and about doubles the price of the work. Another objection is the weight, since it is possible to place only about half as much gravel as mud on a bank.

The objection to mud is the waste of material. From careful calculations made a few years ago, a conclusion was reached that the difference between bucket measurement and the mud in place on the bank, after drying, was fully fifty per cent.

# HAND-LAID DRY STONE PROTECTION.

When there is a stretch of protecting marsh in front of the site of the bank, mud revetments without protection will answer, and are much cheaper; but where they are subject to the wearing action of the tides or to the wave action produced by heavy wind, they wash rapidly, and are alone of very little permanent value. This is sometimes partially prevented by laying stone on the face of the bank, which prevents washing for a time, but eventually the earth backing washes from behind the stone, the stone falling into the hole thus formed, and that above comes tumbling down to the bottom of the bank, leaving it without protection (Fig. 8).

Construction.—There is quite an art in laying stone successfully, and

it is difficult to get men who can satisfactorily perform the work. After a part of the mud is in place, usually a little above high water, the bank is shaped with shovels, being packed hard on the face. Nothing but carefully selected mud should be used and no pains spared to obtain it. Sand is worse than useless, and mud with even a small percentage of sand makes a poor backing for the stone.

(b) Bunk when contract was let for restoration.
(b) Bunk when restored to original condition.

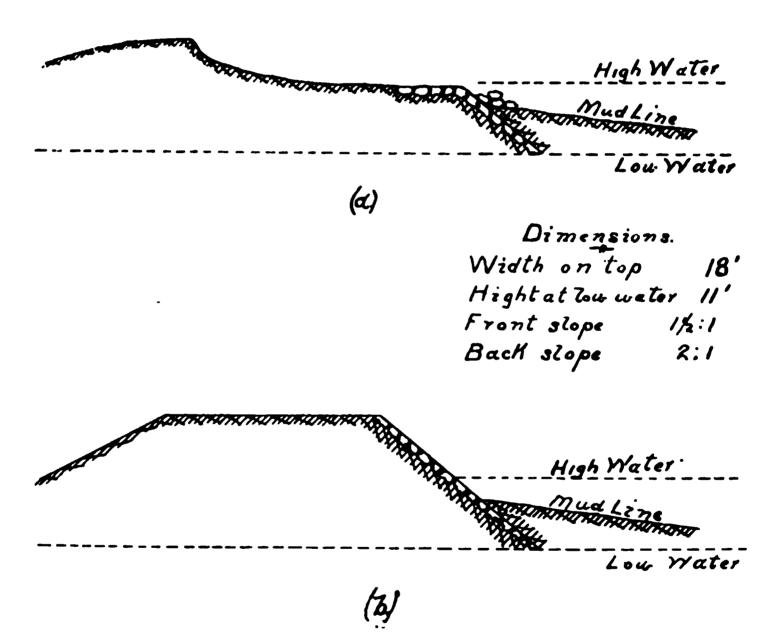


Fig. 8.—Cross-sections of Bank at Fort Mifflin, Pa.

Before the material is dry and hard the stone is laid. Often a log or square timber is placed about twelve inches in advance of the toe of the bank and the first course of stone laid inside of it (Fig. 9); this prevents the sliding out of the stone at the bottom. Lines are placed, to which the stone is to be laid, the stone being placed with the greatest width in a horizontal position. The lines should be so arranged that the stones,

to reach the proper slope, must be pressed two or three inches into the backing.

A course of stone is laid, then all the interstices are carefully filled with chips of stone ("spalls"). This is a most important detail, and should never be neglected, it being best to drive these chips in hard with stone hammers to insure good contact. The next course is then laid and the operation repeated.

The stone is usually piled in front of the bank, the lower courses being laid at low water. There should always be two sections of the bank under construction at once: one which will put the mason above high

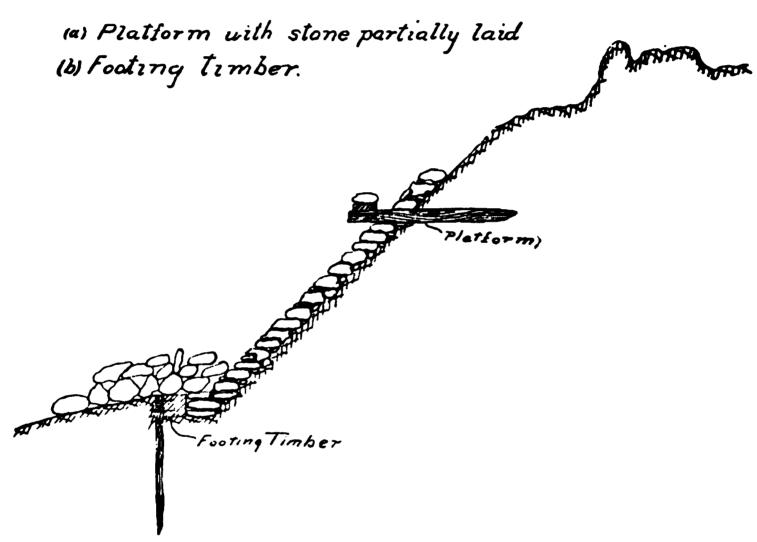


Fig. 9.

water when high water comes; the other to permit him to avail himself of low water in placing his bottom courses.

Two men work together—a mason, who lays the stone, and a helper, who selects and passes the stone up to him from the pile below. On the high tide, the helper is often up to his waist in water.

Little wooden platforms are erected at various heights on the face of the bank, and are used to store stone and also for the masons to stand upon while laying the upper courses (Fig. 9). These are not removed until the work is completed, and then the holes left in the wall are carefully filled with stone. The usually accepted slope for these walls is 1:1. It has been found that at this slope the stone is neither displaced by tidal action, nor does it tend, by its own weight, to bury itself into the mud backing.

Heavy Dry Wall.—At times a heavier "dry wall" is laid, of several thicknesses of stone, and on a variety of foundations, but always with the same result eventually—namely, the washing of material from behind the wall and the falling of the wall itself.

These walls are five or six feet on the bottom with a width of about two feet on top, and are sometimes laid with a batter on the front, although usually built straight. They are really a waste of material, being very little better than a single layer of stone, and using probably more stone than a wall laid in cement. The best of these are put on a light, three-pile foundation, with flooring under the wall only and without sheeting.

## TIMBER PROTECTION.

The idea of timber protection is almost as old as that of the mud bank itself. Timber being plentiful, it has generally been used.

These crib formations are a good protection, and may be made very substantial. They are, however, liable to decay, particularly the portions between low and high water, the natural life of such a structure being about five years. Then repairs must be made, and the cost of such repairs is in proportion to the stability of the original structure: the better the original, the greater the cost of repairs.

The oldest method in existence is the piling of cord wood perpendicular to the length of the bank, and in front of it (Fig. 10). The pieces are usually ten feet in length and about four inches in diameter. They are laid to within two or three inches of the top of the bank, the ends being firmly driven into the bank, as good a bond as possible being effected beween the bank and the wood. In order to prevent the sticks rolling, they are piled in sections, very much like ordinary cord wood. A solid row of vertical pieces is driven into the marsh perpendicular to the length of the bank, another similar row being driven parallel to them at a distance of about fifteen feet. The space between is then filled with the horizontal logs, the vertical row keeping the horizontal ones in position.

At first glance one would say that this construction was of little or no avail, the speedy decay of the wood and the washing of the water, which will certainly penetrate to the bank, probably effecting a speedy disappearance of the protection. This is not the case. Upon examining one of these protections which had been in place for twenty years,

PLAN

Cord wood protection.

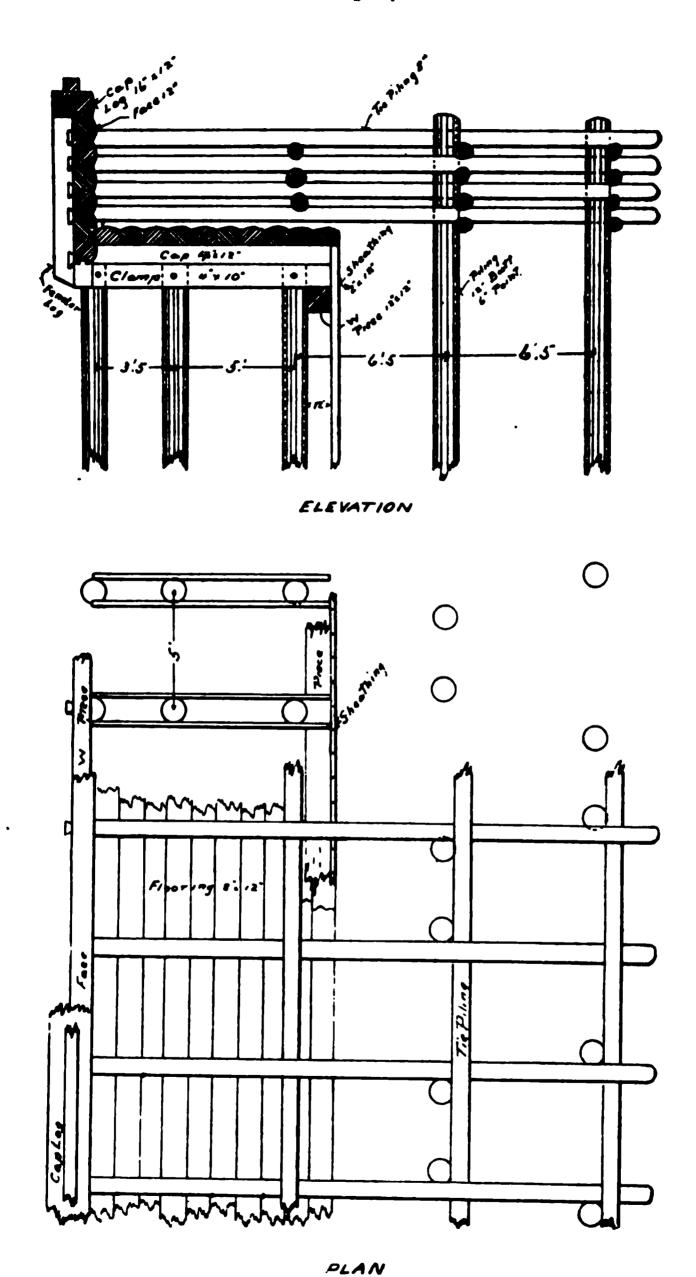


Fig. 11.—BULKHEAD PROTECTION.

a foot, at an elevation corresponding to three feet above low water, was pretty badly decayed, but had formed a layer of dirt which at that point made the bank really ten feet wider than the bank proper. Otherwise the bank was intact, and apparently in as good condition as ever. Earth is at times piled on top of the protection to help keep the logs in place.

A protection very generally used on small banks is the driving of upright sheet piling. These, if driven without guides on top and at low water, and also if they are not plowed and grooved, are of very little value, the filling washing from between the openings in the board. A heavy log is fitted with handles, and, several men raising it, it is allowed to fall on the head of the timber and drive it to place—a very tedious and expensive operation.

A method of protection used extensively in the creeks of New Jersey is that of a row of cedar poles driven in the marsh about twenty feet in front of the bank, being about four inches in diameter and twelve inches c. to c. These poles break the waves caused by wind, which are likely to erode the bank, and render the water coming in contact with the bank quite smooth.

This brings us to the more elaborate forms of protection which end in bulkheads. It is not my purpose to go into bulkhead work, although this is but another form of bank protection. I will, however, give a sketch of an excellent form of protection, practically a wharf, which is very generally used (Fig. 11).

Description of Design.—Piles are driven for a foundation, the first three being sawed off ten inches above low water, and two clamp pieces  $4'' \times 10'' - 10'$  placed on either side of them. Above this is placed a cap-piece,  $4'' \times 12'' - 10'$ , extending over the first three piles. To this cap the flooring is spiked, running parallel to the bulkhead. At the inside end of the clamps and cap-pieces the sheet piling is driven. This piling should in every instance be driven to a firm bearing, so that, no matter what the wash or strain upon it, there would be no danger of shoving out at the bottom.


Two other rows of piling are placed back of the first three, and are sawed off to a level a few inches below the top of the bulkhead. These are called tie piles, to which are fastened the tie rods running through notches in the bulkhead. These piles are on the same line longitudinally, but are alternately first on one side of the tie rods and then on the other. The rods are saddled—i. e., rounded out to fit the piles

snugly. The position of the piles assures a straight rod, and, when bolted through and through, they form a construction which should never give. In addition to this, longitudinal piles are laid between the rods and behind the tie piles, being bolted securely to both. The bulkhead itself is built of twelve-inch stuff, faced on three sides, rough in back, each course being drift-bolted securely to the course below, in addition to which the ends of the tie rods are securely bolted to the bulkhead timber. It will be noticed that the tie rods are placed between two bulkhead pieces, thus cutting away only a little of each piece of timber and saving its strength.

#### CONCRETE WALL.

The building of a wall, either one of concrete or of stone laid in cement, furnishes by far the most efficient and permanent protection.

a



Rather than generalize on the subject of these protections, I have chosen two examples, which I had the opportunity of watching during construction.

General Description.—The wall is situated at one end of a great freshwater reserve basin, under construction at the present time, and is of concrete and on a pile foundation. It is parallel to and thirty-nine feet from the line of an old causeway, which was protected by crib work. In designing the wall, the following contingencies had to be met and overcome:

- In order to place the wood construction below the plane of mean low water, and also to permit the pile-driver to work at all stages of the tide, it became necessary to remove, to a depth of about seven feet, the mud from the site of the work (Fig. 12).
- 2. At a distance of fifty feet from the face of the wall there was to be made a depth of twenty-five feet at mean low water, making a slope of

2 on 1 in front of the wall. The piles, therefore, must be brought to such a depth as to make the foundation safe against sliding when the material was removed from in front.

3. The open space between the new wall and the old causeway was to be filled with dredged material; therefore the foundation as well as the wall had to be designed to bear the great thrust of this material.


Details of Design and Construction.—In all permanent constructions exposed to tidal action the wooden portions of the structure must be below, or very nearly at the plane of, mean low water; and when thus placed, are as good as any other known construction and much cheaper than some. The material was excavated to a depth of two feet at mean low water by means of a grapple dredge with a seventy-foot boom, being thrown over along the line of the cut and also at one end. The cut was made one hundred feet in width to allow: (a) A slope of two on one to prevent the material from caving into the cut; and (b) for the construction of the foundation and a width sufficient to allow the pile-driver to drive the first line of piles under the wall, head on.

Upon the completion of this work, the engineer expected to use the banks thus formed as a coffer-dam, putting sheet piling across one end, and with pumping plant keep the level of the water inside the dam below the level of the pile heads, thus enabling the work of placing the clamps and flooring to proceed without tidal interruption. This idea was finally abandoned, owing (1) to the extreme softness of part of the material excavated, it being thoroughly unfit for the contemplated use; (2) to the expense of moving the pumping plant to the site of the work, and maintaining the same; and (3) to the leakage of the old causeway, the water having cut channels through the filling of the crib until with every tide water flowed through in streams, with little or no opposition.

## DIFFICULTIES OVERCOME.

- 1. It was difficult to keep the material cast up in place, owing to its softness, and also the large amount of material to be excavated (twenty yards per running foot of cut), all of which had to be placed on one side. Several slips occurred, the material breaking away from the center of the bank and sliding back into the cut. When a slide of this kind occurred, it was left until the last, when on one high water it was thrown behind that material originally excavated and no more trouble was experienced.
  - 2. In order to drive the piles to a sufficient depth to insure the proper

(B)



(4)

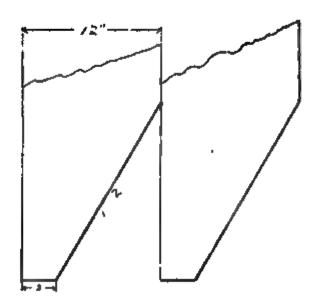


Fig. 13,-Chose-sections of Smeat Pilling.

stability against the foundations' sliding, seven feet of hard gravel were to be driven through, besides the mud. Borings made by means of a jet showed mud to fifteen feet; a thin layer of sand, with gravel below to a depth of thirty feet, the depth to which the borings were taken. piles were supposedly driven to a depth of about twenty-two feet mean An ordinary pile-driver with a drop-hammer was used, the weight of the hammer being twenty-seven hundred pounds. piles were unshod and driven unpointed. Judging from the condition of some piles driven on a later contract near the site of the work, and drawn, there is no doubt that the ends were very badly "broomed" for a distance of at least three feet. This, however, did not endanger the bearing power, as there is more than enough to support the weight of the wall and filling. The piles were of yellow pine, thirty feet long, not less than twelve inches in diameter four feet below the top, and six inches at butt without the bark.

Construction of Foundations.—The piles were driven with a wroughtiron band, each pile being sawed off fair at a height of eighteen inches above mean low water and the bands driven one and a half inches below the top. On top of the piles, and securely spiked to them, were cappieces  $12'' \times 12''$ , extending the entire width of the foundation. On these caps the flooring was laid entirely over the foundation structure,  $4'' \times 12''$  yellow pine being used, and securely spiked to the caps. Before this flooring was put in place, the space between the piles was filled with dredged material up to the level of the top of the caps, the idea being to prevent the washing out of the fill through any possible holes in the floor. The sheet piling was placed at the back of the foundation, and was of three kinds (Fig. 13).

(A) The strips for the ploughed part were first put in on one pile and nailed securely in place, the next piece of sheeting being then driven. The piles themselves were  $12'' \times 12''$  with a two-inch groove, the strips being of cedar, which when wet swells, insuring a tight joint.

B and C are both yellow pine. Of the three kinds, C is the least expensive, but not so effective as A.

### STONE WALL.

Owing to the low elevation of the ground in front of an old bank, it was decided to construct a stone protection wall about one hundred feet in front of it, filling in the space between the dredged material taken from in front of the wall, thus reclaiming the land.

If the stability of the wall was calculated to withstand the thrust of

this material, serious mistakes were made, as the wall is a miserable failure. A depth of about five feet of material was excavated from the site of the wall to allow the sawing off of the piles at the proper height and the subsequent placing of the clamps and flooring. The ditch was made wide enough to permit the pile-driver to operate "end on the wall at all stages of the tide." As much material as possible was thrown on the inside of the line of the wall, the remainder of the material being placed on the outside line of the ditch.

The piles were then driven and caps placed, the sheeting being left until the last. The caps and flooring were placed at low water, and then the stone laid in cement, the various courses being laid alternately at high and low water. Finally, the space behind the wall was filled in with material dredged from the front.

Details of Design.—The foundation consisted of three rows of piles, three feet center to center and ten feet center to center respectively. The tops of the piles were trimmed away, leaving only four inches width of the original head, allowing the clamps to fit neatly, the back or socalled row of tie piles being treated in the same way. This was a mistake in the design, as it left only four inches of wood where there should have been ten inches, thus very much weakening the construction. The sheeting consisted of two-inch hemlock, and was placed on the outside with only a  $3'' \times 6''$  wale-piece to hold it in place. This wale-piece was spiked to a pile every five feet, and was supposed to be spiked to every piece of sheeting. When the spikes were tried, it was found that they split the hemlock sheeting, and it being too expensive for the contractor to bore proper holes to receive the spikes, this part of the operation was omitted (without the knowledge or consent of the parties having the work done). The contractor at once realized that the sheeting with no fastening was practically useless, and thoughtfully substituted three-foot lengths instead of fifteen, as called for in the plans. There being some doubt as to the lowwater line (in the mind of the contractor), the piles, instead of being sawed off ten inches above low water, were sawed off eighteen inches This gained him sixteen inches of tide in which to place his clamps, floor, and lower courses of stone, and also saved him 2.66 cubic feet of masonry for every running foot of wall.

The flooring was placed as the specifications directed, and the wall was built nearly in accordance with them. The stone was of the specified size.

Upon the completion of the wall, material for filling was placed in-

side, and, although very little was put in at one time, the sheeting promptly pushed out at the bottom, being finally left in the shape shown in figure 14; and as the filling was continued, the whole structure, foundations and all, moved to meet the sheeting until the condition of the wall is about as shown.

The wall was accepted, the failure being attributed to weakness of design.

Duties of the Engineer.—The duties of an engineer employed upon this class of work being somewhat analogous in all the above works, I have left till the last a description of these duties, and shall consider all the sections under one head.

On mud revetment work an engineer is very rarely employed, one of the bank managers, a farmer usually, being given charge of the work. As he has to look after his farm and the bank at the same time, the bank is usually left to the supervision of the contractor, and finally accepted as a whole upon completion. This is really a much better way than at first thought it would seem. The grade and width on top with slopes may be very nearly judged by any one at all familiar with bank work. The other most important points in bank building—viz., to leave enough "berm" between the cut and foot of bank, and not to pile more material on the meadow than it will bear without breaking may be safely left to the contractor. The sliding in of the piled-up material due to either of the above causes is so disastrous to the contractor that, for his own protection, he will give these points careful attention. Again, from his experience he will be much better able to judge the bearing power of the meadow, and the proper amount of berm to be left.

If stone protection is to be used, careful supervision should be given to the laying of the stone. Speed is requisite to the profit of the contractor; and the greater the speed, the more careless the placing of the stone. A good firm backing should be insisted upon, the stones to be pressed into this three or four inches. Each course of stone should have a firm bearing upon the course below. The line of batter should be carefully carried out, for, as explained above, on this depends to a great extent the lasting quality of the wall.

In bulkhead protection the services of an engineer are almost indispensable. All the timber and iron work should be carefully inspected. The lines for driving the piles and the elevation at which they should be cut off should be given by the engineer, and permanently marked to enable reference at any moment. Finally, a careful supervision should

be given to the actual work, and the following points watched with great care, for therein the contractor generally faileth:

- 1. Careful record should be kept of the material used in the construction, to make impossible the substitution of other for that inspected. This should include a careful list of all material brought upon the site of the work by the contractor.
- 2. Care should be taken that the piles be cut off at the required height.
- 3. Every precaution should be taken to insure the driving of the specified length of sheeting.
- 4. The fastenings, whether bolts or spikes, should be inspected when in place, and under no circumstances should work be allowed to be covered up until inspected.

The above points apply equally well to concrete and stone wall protection, except that in these cases is added the careful inspection of the mixing of the cement or concrete, as the case may be, and the testing of them.

In my opinion, the most reputable contractors need as much supervision as those of unknown honesty. Workmen are prone to fall into the easiest methods of accomplishing the work, and often, entirely without the sanction or knowledge of the contractor, perform the work in ways far from those specified in the agreement and plans.

The highest duty of an engineer is to exact justice, not only from the contractor, but for the contractor. He is a middle-man, and should use his best judgment in interpreting and carrying out the specifications. Often the engineer is too narrow to do anything but nag and in every way annoy the contractor, thus, instead of assisting and working with him, really retarding the work; in the mean time incurring the dislike of the contractor, who then tries to hoodwink him at every turn.

The above points are only a very few of the engineer's duties, but loom up in the practical end of the work. They will apply almost equally well to any kind of construction work, although every piece of work is surrounded by local conditions, which may change in every way not only the duties of the engineer, but the kind of construction and the methods of performing the work.

# DISCUSSION.

L. Y. Schermerhorn.—That there is science even in building mud banks is exemplified by Mr. Wilson's paper. Observation and experience indicate that

skilled men can accomplish very difficult tasks of bank building, while the work of unskilled men frequently results in failure. The difference mainly arises from an erroneous estimate of the action and effect of partially fluid mud when placed in an embankment.

Few wharf builders appreciate the enormous thrust which arises from mud filling in a wharf, or revetment; and they therefore frequently make inadequate provision for the resulting pressures. Consequently when a dredging company is called upon to fill with dredged material such a construction, it is generally undertaken with the explicit agreement that, while reasonable care will be exercised, no guarantee is given as to the stability of the structure to resist the mud filling.

In calculating the required stability of a structure to resist the thrust of mud, it should be assumed that the resulting pressure will be equal to that which arises from a *fluid* with the specific gravity of soft mud: say a weight of from 100 to 110 pounds per cubic foot. To assume that the pressure will only be equal to that which would result from ordinary earth against the back of a retaining wall will lead to disaster. In several cases I have seen structures which would have safely resisted the pressure of sand, destroyed by the pressure of mud filling or gravel filling, even though it had been carried to a height of two or three times that of the mud.

Percy H. Wilson.—In speaking of footing-ditches, I refer only to those ditches immediately behind the bank. In order to do away with these ditches, and still drain the meadow, ditches are dug one or two hundred feet back of the bank, running parallel to it. These ditches empty into one running in a perpendicular direction to the bank, which ditch eventually discharges through a sluice into the river. These sluices are a constant source of annoyance, the musk-rats at these points going through the banks, and the city has, in several places, notably at Swanson Street, erected elaborate constructions to lessen the danger of washout at these points.

# SOME UNUSUAL LOCOMOTIVES.

#### A. B. EDDOWES.

Read October 5, 1901.

The types of locomotives selected for consideration in the following descriptions were chosen as being of more engineering interest than the more widely known standard or usual types, which are in general use on all our large railroads, and with which every one is more or less familiar.

I must acknowledge the obligation to Messrs. Burnham, Williams & Co. for their courtesy in permitting the use of the necessary data and photographs from which these descriptions were obtained.

About twenty-five years ago there was, coincident with the growth of our large cities and the expansion of suburbs in every direction, a demand for better and swifter urban and suburban means of transporting passengers than was afforded by the then existing horse-drawn tramway cars that were in general use at that period. This demand had been met in a few cases, as in New York city, by the construction and operation of elevated railroads, but in many localities where the population was not so dense and the area to be served did not present the favorable geographic conditions that existed in New York, elevated railroads were out of the question; and so the effort was made to provide steam locomotives of the noiseless, inclosed type that would give satisfactory service through crowded city streets. The degree of success attained varied somewhat with local conditions, but, on the whole, the steam motor did not prove to be the best solution of the problem in the large cities, although for suburban service, where trips at infrequent intervals were all that was required, the motor train did excellent work in many places. An example of the kind referred to was the trains from Atlantic City to Longport, with which, no doubt, many are familiar.

A peculiarly interesting example of motor for this character of service is the subject of the first description, which was the first one of six motors built for the government of New South Wales for use on the tram-

type, with a horizontal barrel 29%" in diameter and a vertical barrel or furnace casing 39" in diameter, with a furnace 33" inside diameter X 59%" deep, giving a grate surface of 5.9 square feet. The boiler contained 113 tubes, 1%" diameter, 5' 4%" long, of brass, while the fire-box was made of copper %" thick, tube sheet %" thick. Heating surface, tubes, 237.0 square feet; heating surface, furnace, 43.8 square feet; heating surface, total, 280.8 square feet—a ratio of heating to grate surface of 47.6:1. The engines are of the vertical compound tandem

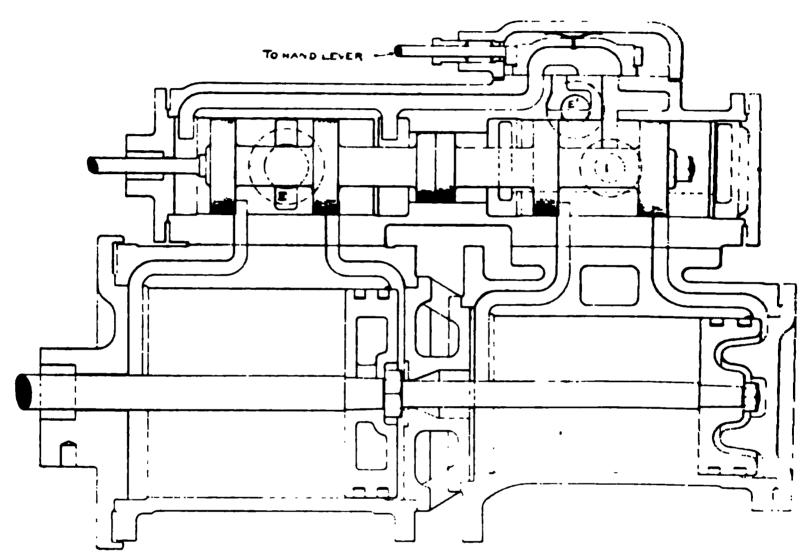


Fig. 2.--Cylinders of Compound Motor.

type, with cylinders 9" and 12" diameter  $\times$  12" stroke, giving a ratio of expansion of 1:1.77.

The steam distribution is controlled by two slide valves, one of the ordinary or D pattern, having a bridge across the face, which was called the change valve, and was used to change the engine from simple to compound, being operated by the hand-lever shown in Fig. 1. When this change valve was in the position shown on the diagram of the cylinders, Fig. 2, the engine was working compound, port E' being closed and the steam entering through pipe I, passing through the ports and the piston valve to the high-pressure cylinder, exhausting through the short straight port to the change valve, and thence to the feed ports of the low-pressure cylinder, being finally exhausted through

bumper. The medium is merely the ordinary draw-bar connection commonly used between engines and tenders, except that it is made of great strength compared to the work required of it (Fig. 30).

The holes have clearance space next the draw pins to permit the strains to pass through the buffers when the engine is used as a pusher, and small bearing strips are provided, as shown by accompanying illustration, immediately above the bar to prevent unusual tipping of the engines at their point of connection.

The throttle rigging is arranged to enable the engineer to control both engines from one position.

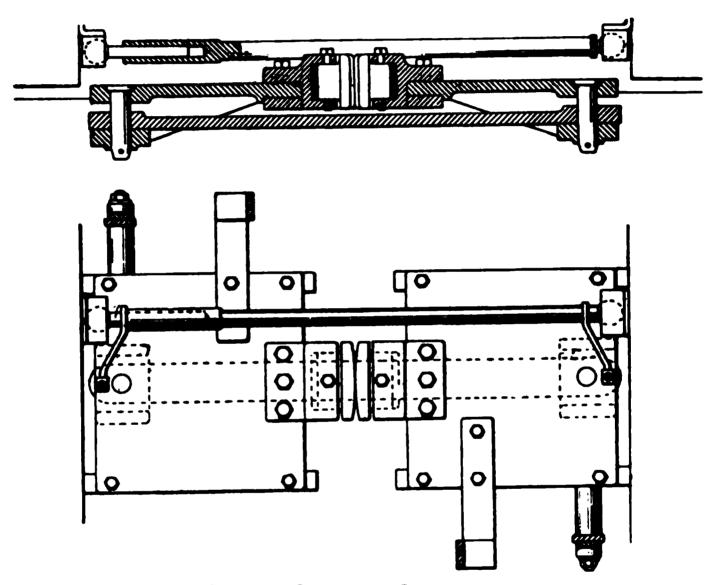


Fig. 30.— Detail of Draw-bar.

Referring to the illustrations Figs. 31 and 32, it will be observed that the throttle levers are made of the crank pattern, opening as they are pulled to the right or toward the engineer. Two levers are provided for each engine. One is fast to the throttle rod of its engine, and the other is connected across to the other engine by various rods and other mechanism, so adjusted that the position of the lever or the length of its connections is not materially altered, no matter what position the engines may assume on the track in relation to each other. With this arrangement the two levers may be used separately by the engineer, or they may be locked together and used as a single lever, opening or clos-

in the methods of counterbalancing. Thus, experiments some years ago on a captive engine run at a speed of about sixty miles an hour showed that the weight on the drivers was wholly neutralized alternately; that is, all the weight on an axle was momentarily borne on a single driver. This was, of course, due to imperfect counterbalancing. I should like to know whether the difficult problem of counterbalancing both the reciprocating and rotating parts has been more satisfactorily solved in recent practice.

MR. EDDOWES.—No, I can't say there is any very marked progress made, except in the high-speed engines an effort is made to reduce the reciprocating parts to the minimum. As I spoke of the B. & O., the pistons are made of malleable iron and the rods bored hollow. I do not think any special change has been made by which the balancing of the locomotive is done.

L. Y. Schermerhorn.—While not exactly pertinent to the subject of the evening, I would like to ask Mr. Eddowes whether it is the locomotive builder or user who objects to the use of anthracite coal.

Mr. Eddowes.—I think it would be altogether the locomotive user, principally because anthracite coal generally costs more than bituminous coal. I think there is no practical difference in the cost of hard or soft coal locomotives—not more than a few hundred dollars in a machine costing twelve or fifteen thousand.

THE PRESIDENT.—Perhaps the author of the paper will tell us something about locomotives using liquid fuel.

MR. EDDOWES.—I might have done so. The oil burner is a very simple affair. Almost any coal-burning locomotive could be fitted with a device of that character.

Walter L. Webb.—Why is it that those engines have not been used in this country, whereas they have been used in Europe?

Mr. Eddowes.—It is owing to the price of oil. I did know at one time the comparative figure at which it would pay to burn oil compared with the price of coal. I think it would be equivalent to coal at two dollars a ton and oil at fifty cents a barrel. I think it was something in that proportion. The subject has been investigated and will probably be applied in a very extensive manner in the near future owing to the opening and development of the new Texas oil fields. That oil seems to be very suitable for such uses as operating locomotives. It seems to be somewhat of the character found in southern Russia, where it is used for all kinds of locomotives.

A Member.—I would like to ask Mr. Eddowes whether he is familiar with producing gas put up for locomotives.

Mr. Eddowes.—I have not had any experience with that as yet.

A Member.—I saw drawings showing two gas producers mounted on a car, two gas engines, and the ordinary apparatus which goes with it—lifting machinery for the coal, the same as an ordinary gas plant on land. The inventor was quite sanguine. He was a wealthy man, and his family backing it up also had large means, and I have no doubt but that they will put it into practice some day.

Mr. Eddowes.—I am discouraged as to the use of the gas engine for locomotives. I think it might be practical at some time if the development in hydrocarbon work continues. I understand hydrocarbon motor cars, built to run on common roads, approximate about fifty miles an hour with motors of 50 horse-power. It would seem practical, especially where light locomotives are required.

A Member.—Some of these plants are running with fuel at only the cost of handling, and that comparatively leaves quite a margin for sale. This car with the apparatus, I think, was designed to give 400 horse-power. Of course, you can figure what they would save.

Mr. Eddowes.—Speaking of gas producer cars, locomotives with wide fire-boxes, which have become quite common in the last few years, have done and still do burn the refuse from the mines, which is of no other use at all. They cannot otherwise get rid of it, and a great deal has been burned up in locomotives which are constructed to burn just that kind of fuel. I would think that, from a practical standpoint, the refuse could be handled more economically in the steam locomotive boiler designed for that class of fuel than by the producer process.

### ABSTRACT OF MINUTES OF THE CLUB.

Business Meeting, September 21, 1901.—The President in the chair. Fifty-two members and seven visitors present.

Announcement was made that the Board of Directors had adopted and ordered to be entered on the minutes an expression of sorrow for the assassination of William McKinley, President of the United States.

The death of Brigadier-General William Ludlow (for several years an active member of this Club, and its President during the year 1884) was announced.

Mr. Percy H. Wilson presented a paper on "The Protection of Lowlands against Tidal Overflow." The subject was discussed by Messrs. L. Y. Schermerhorn, Henry G. Morris, and others.

The Tellers reported the election of Messrs. E. H. Mumford, Edward L. Reynolds, and C. E. Schermerhorn to active membership, and A. M. Loudenslager to associate membership.

REGULAR MEETING, October 5, 1901.—The President in the chair. Forty-five members and four visitors present.

Mr. A. B. Eddowes read a paper on "Some Unusual Locomotives." The subject was discussed by Messrs. Carl Hering, Edgar Marburg, Henry Leffmann, L. Y. Schermerhorn, and others.

### ABSTRACT OF MINUTES OF THE BOARD OF DIRECTORS.

REGULAR MEETING, September 21, 1901.—Present: The President, Vice-Presidents Schermerhorn and Smith, Directors Christie, Hewitt, Comfort, Riegner, and the Secretary.

The	Treasure	r's report	showed:
		_	

Balance, June 1,	. \$2194.23
Receipts:	
June, \$177.40	
July, 223.50	
August, 54.85	455.75
	\$2649.98
Disbursements:	
June, \$328.82	
July, 525.54	
August, 204.40	1057.76
Balance, September 1, 1901,	. \$1592.22

The Information and House Committees were requested to jointly prepare a plan for celebrating the anniversary of the Club's foundation on the date of the second stated meeting in December.

### ADDITIONS TO GENERAL LIBRARY.

FROM THEODORE B. KLEIN, HARRISBURG PA.
The Canals of Pennsylvania and the System of Internal Improvements, 1901.

FROM THEODORE COOPER, NEW YORK.

General Specifications for Steel Highway and Electric Railway Bridges and Viaducts, 1901.

From Bureau of Surveys, Philadelphia. Annual Report, 1901.

FROM WM. L. PRATHER, PRESIDENT, UNIVERSITY OF TEXAS, AUSTIN. Bulletin No. 5. Texas Petroleum. W. B. Phillips, 1900.

From Harvey Linton, City Engineer, Altoona, Pa. Municipal Report, City of Altoona, 1901-2.

FROM EMIL L. NUEBLING, READING. PA.

1

Thirty-sixth Annual Report of Board of Water Commissioners, Reading, Pa., 1901.

FROM WILHELM BRAUMÜLLER, VIENNA, AUSTRIA.

Siedek, Studie über eine neue Formel, etc., des Wassers in Flüssen und Strömen, 1901.

FROM GEO. B. HARTLEY, PHILADELPHIA.

Details of Construction of the Niclausse Boiler.

From Chief of Engineers, U.S. Army, Washington, D.C. Professional Papers No. 28, Testing Hydraulic Cements, 1901.

From John Birkinbine, Philadelphia.

The Production of Iron Ores in 1900.

The Production of Manganese Ores in 1900.

From Commissioner of Education, Washington, D. C. Report for the year 1899-1900.

OSGOOD WEISH

ROBERT S. NRWHALL

PRESIDENT SECRETARY

GEORGE M. NEWHALL
MANAGER

George M. Newhall Engineering Co.

ENGINEERS and ARCHITECTS
Offices, 136 S. Fourth St., Phila., Pa., U. S. A.
SEE PAGE 2

# HOWSON PATENTS

PHILADELPHIA

SEE SECOND COVER PAGE

# A. FALKENAU MECHANICAL ENGINEER And MACHINIST

109-115 N. TWENTY-SECOND ST.

### L. F. RONDINELLA M.E.

Consulting Engineer

728 STEPHEN GIRARD BUILDING

TWELFTH STREET ABOVE CHESTNUT
PHILADRIPHIA

ALEX. G. SPARKS

S. W. EVANS

### SPARKS & EVANS

Contractors,

20 S. Broad Street Philadelphia Pa.

MASONRY A SPECIALTY

WALSH PACKING CO.

PHILADELPHIA PA.

Manufacturers of

"Walsh Metal Face Packing"

THE GREATEST HYDRAULIC PACKING
ON THE MARKET

Walsh Combination Boiler Gaskets can be used from 10 to 30 times.

### C. L. BERGER & SONS

Successors to BUFF & BERGER

# Improved Engineering and Surveying Instruments

No. 9 Province Court Boston Mass.

They aim to secure in their instruments: Accuracy of division; Simplicity in manipulation; Lightness combined with strength; Achromatic telescope, with high power; Steadiness of Adjustments under varying temperatures; Stiffness to avoid any tremor, even in a strong wind, and thorough workmanship in every part.

Their instruments are in general use by the U. S. Government Engineers, Geologists and Surveyors; and the range of instruments, as made by them for River, Harbor, City, Bridge, Tunnel, Railroad and Mining Engineering, as well as those made for Triangulation or Topographical Work and Land Surveying, etc., is larger than that of any other firm in the country.

Illustrated Manual and Catalogue sent on Application



### THE WATSON-STILLMAN CO.

204-210 E. 43d St. New York

Accumulators Valves Etc.

IMPROVED HYDRAULIC JACKS

Send for Catalogue XIII



### George M. Newhall Engineering Co. Limited 136 S. FOURTH STREET

**PHILADELPHIA** 

Design and Superintend all Buildings Engineering and Machinery in connection with Manufacturing Plants

OSGOOD WELSH PREMIDENT R. S. NEWHALL SECRETARY GEORGE M. NEWHALL MANAGES

Design Manufacture and Erect RAILWAY BRIDGES VIADUCTS and ROOFS in Steel and Iron

### TENSILE MEMBERS

Forged without welds, piles or buckles

### OOMPRESSIVE MEMBERS

Manufactured by processes which insure an entire absence of constructional strains

### WROUGHT-8TEEL TURN TABLE8

With centres of Conical Steel Rollers and Steel Plates

## MAIN OFFICE AND WORKS, EDGE MOOR, ON DELAWARE RIVER

POST OFFICE WILMINGTON DEL.

WILLIAM H. CONNELL President FRANCIS W. HEISLER Vice-President WILLIAM F. SELLERS Treasurer

H. S. GARRETT Secretary S. P. MITCHELL Manager C. W. BRYAN Chief Engineer

# WILLIAM



Philadelphia Pa.

### **IMPROVED**

ACCURATE FOR WORK

**Testing Machines** Mechanical Stokers Boring Mills Bending Rolls

**Bolt Cutters** 

J Hand Steam Belt Cranes | Hydraulic Hectric

are well aware of the abso-"11911188TS lute necessity of mathematical accuracy in designing

new work; they also know that the best designs are rarely perfectly carried out through faulty construction.

We are both designers and constructors of machine tools and aim towards equal accuracy in both departments.

Lathes Planers Steam Hammers

Injectors Pulleys Shafting

Hangers Couplings Etc. Etc.

# I. P. MORRIS COMPANY


### PORT RICHMOND IRON WORKS

Founded 1823

Incorporated 1876

# Steam Engine Builders Iron Founders Boiler Makers and General Machinists

HEAVY MACHINERY A SPECIALTY

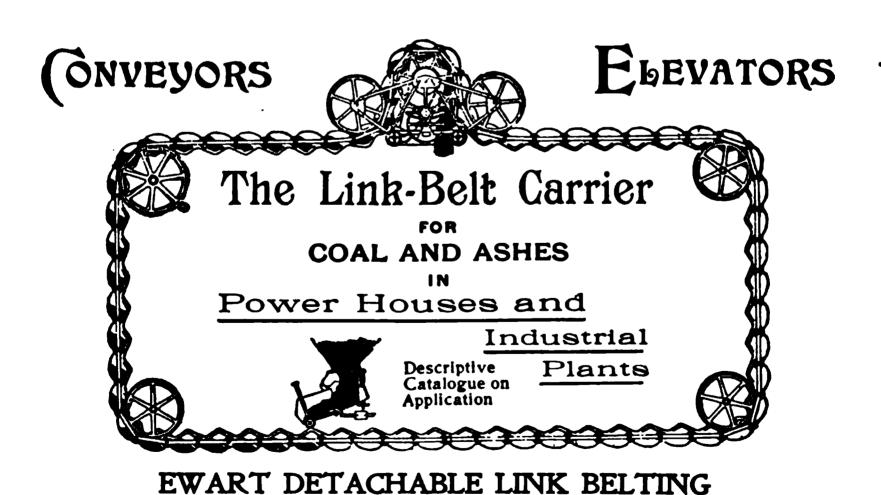

LINK-BELT ENGINEERING CO.

Nicetown Philadelphia

49 Dey St. New York

OSGOOD WELSH

WELSH R PRESIDENT

ROBERT S. NEWHALL SECRETARY

GEORGE M. NEWHALL

George M. Newhall Engineering Co.

ENGINEERS and ARCHITECTS
Offices, 136 S. Fourth St., Phila., Pa., U. S. A.

# HOWSON PATENTS

PHILADELPHIA

SEE SECOND COVER PAGE

# A. FALKENAU MECHANICAL ENGINEER And MACHINIST

109-115 N. TWENTY-SECOND ST.

### L. F. RONDINELLA M.E.

Consulting Engineer

728 STEPHEN GIRARD BUILDING

TWELFTH STREET ABOVE CHESTNUT

PHILADRLPHIA

ALEX. G. SPARKS

8. W. EVANS

### SPARKS & EVANS

Contractors,

20 S. Broad Street Philadelphia Pa.

MASONRY A SPECIALTY

WALSH PACKING CO. PHILADELPHIA PA.

Manufacturers of

"Walsh Metal Face Packing"

THE GREATEST HYDRAULIC PACKING
ON THE MARKET

Walsh Combination Boiler Gaskets can be used from 10 to 30 times.

### C. L. BERGER & SONS

Successors to BUFF & BERGER

## Improved Engineering and Surveying Instruments

No. 9 Province Court Boston Mass.

They aim to secure in their instruments: Accuracy of division; Simplicity in manipulation; Lightness combined with strength; Achromatic telescope, with high power; Steadiness of Adjustments under varying temperatures; Stiffness to avoid any tremor, even in a strong wind, and thorough workmanship in every part

Their instruments are in general use by the U. S. Government Engineers, Geologists and Surveyors; and the range of instruments, as made by them for River, Harbor, City, Bridge, Tunnel, Railroad and Mining Engineering, as well as those made for Triangulation or Topographical Work and Land Surveying, etc., is larger than that of any other firm in the country.

Illustrated Manual and Catalogue sent on Application



### THE WATSON-STILLMAN CO.

204-210 E. 43d St. New York

# HYDRAULIC PUMPS PUMPS PUNCHES

Accumulators Volves Etc.

IMPROVED HYDRAULIC JACKS

Send for Catalogue XIII



WILLIAM



Philadelphia Pa.

**IMPROVED** 

Maghine Tools

FOR ACCURATE
WORK

Testing Machines
Mechanical Stokers
Boring Mills

Bending Rolls

**Bolt Cutters** 

Cranes { Hand Steam Belt Hydraulic Electric Etc.

are well aware of the abso-Ilgineers lute necessity of mathematical accuracy in designing new work; they also know that the best designs are rarely perfectly carried out through faulty construction.

We are both designers and constructors of machine tools and aim towards equal accuracy in both departments.

Lathes Planers Steam Hammers

Injectors Pulleys Shafting

Hangers Couplings Etc. Etc.

## George M. Newhall Engineering Co. Limited

### 136 S. FOURTH STREET

PHILADELPHIA

00

Design and Superintend all Buildings Engineering and Machinery in connection with Manufacturing Plants

OSGOOD WELSH PRESIDENT

R. S. NEWHALL SECRETARY

GEORGE M. NEWHALL MANAGES

# I. P. MORRIS COMPANY

## PORT RICHMOND IRON WORKS


Founded 1823



Incorporated 1876

# Steam Engine Builders Iron Founders Boiler Makers and General Machinists

HEAVY MACHINERY A SPECIALTY

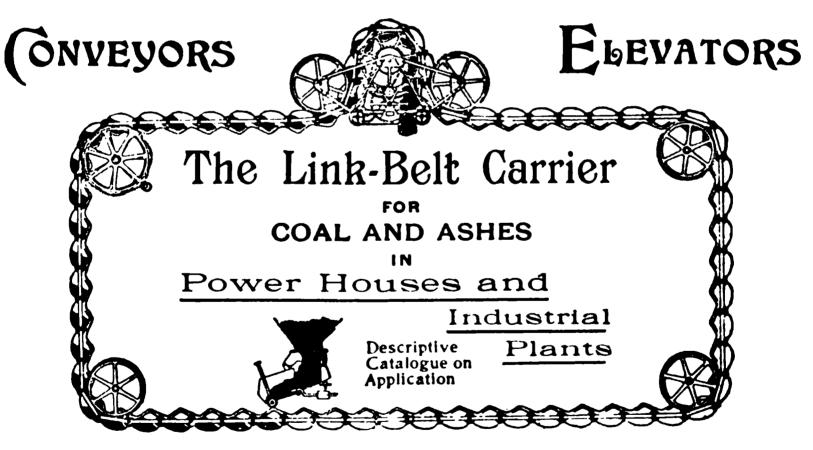


EWART DETACHABLE LINK BELTING

# LINK-BELT ENGINEERING CO.

Nicetown Philadelphia 49 Dey St. New York Park Building Pittsburg

### ----•THE•••••

# WILLIAM (RAMP AND SONS

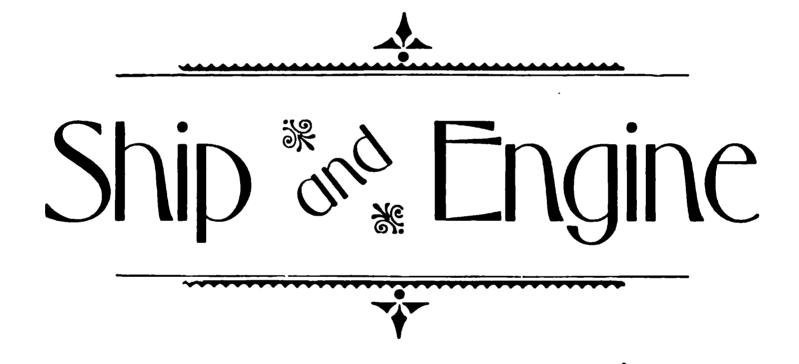

# BUILDING COMPANY

PHILADELPHIA

00000D WELSH PRESIDENT BOREST S. NEWHALL SECRETARY

GEORGE M. NEWHALL MANAGER

George M. Newhall Engineering Co.

ENGINEERS and ARCHITECTS
Offices, 136 S. Feurth St., Phila., Pa., U. S. A.
SEE PAGE 2

#### HOWSON PATENTS

PHILADELPHIA

SEE SECOND COVER PAGE

# A. FALKENAU MECHANICAL ENGINEER And MACHINIST

100-115 N. TWENTY-SECOND ST.

#### L. F. RONDINELLA M.E.

Consulting Engineer

728 STEPHEN GIRARD BUILDING
TWELFTH STREET ABOVE CHESTNUT
PHILADELPHIA

ALEX. G. SPARES

S. W. EVANS

#### SPARKS & EVANS

Contractors,

20 S. Broad Street Philadelphia Pa.

MASONRY A SPECIALTY

WALSH PACKING CO.
PHILADELPHIA PA.

Manufacturers of

#### "Walsh Metal Face Packing"

THE GREATEST HYDRAULIC PACKING
ON THE MARKET

Walsh Combination Boiler Gaskets can be used from 10 to 30 times.

# ennsylvania Military College

Chester, Pa. 40th Year begins September 18th.

Degrees in Civil Engineering, Chemistry, Arts. Thorough Preparatory Courses. Infantry, Artiflery, Cavalry

"A Military School of the highest order."—U. S. WAR DEPT.

Catalogues of Col. C. B. HYATT, President.

#### C. L. BERGER & SONS

(Successors to Buff & Borger)

Improved Engineering and Surveying Instruments
No. 9 Province Court, Boston, Mass.

They secure in their instruments: Accuracy of division; Simplicity in manipulation; Lightness combined with strength; Achromatic telescope, with high power; Steadiness of Adjustments under varying temperatures; Stiffness to avoid any tremor, even in a strong wind, and thorough workman-ship in every part.

Their instruments are in general use by the U.S. Government Engineers, Geologists and Surveyors; and the range of instruments, as made by them for River, Harbor, City, Bridge, Tunnel, Rallroad and Mining Engineering, as well as those made for Triangulation or Topographical Work and Land Surveying, etc., is larger than that of any other firm in the country.

Illustrated Manual and Catalogue sent on Application.



### THE WATSON-STILLMAN CO.

204-210 E. 43d St. New York

# HYDRAULIC PRESSES PUMPS PUNCHES

Accumulators Valves Etc.

IMPROVED HYDRAULIC JACKS

Send for Catalogue XIR







Philadelphia Pa.

**IMPROVED** 

Machine Tools

FOR ACCURATE
WORK

Testing Machines
Mechanical Stokers
Boring Mills
Bending Rolls

Cranes { Hand Steam Belt Hydraulic Electric

**Bolt Cutters** 

are well aware of the absotighteers lute necessity of mathematical accuracy in designing new work; they also know that the best

new work; they also know that the best designs are rarely perfectly carried out through faulty construction.

We are both designers and constructors of machine tools and aim towards equal accuracy in both departments.

Lathes Planers Steam Hammers

Injectors Pulleys Shafting

Hangers Couplings Etc. Etc.

George M. Newhall Engineering Co. Limited

136 S. FOURTH STREET

\* PHILADELPHIA

Design and Superintend all Buildings Engineering and Machinery in connection with Manufacturing Plants

99

OSGOOD WELSH PREMOENT

R. S. NEWHALL SECRETARY
GEORGE M. NEWHALL MANAGEM

# I. P. MORRIS COMPANY

### PORT RICHMOND IRON WORKS


Founded 1823



Incorporated 1876

# Steam Engine Builders Iron Founders Boiler Makers and General Machinists

HEAVY MACHINERY A SPECIALTY

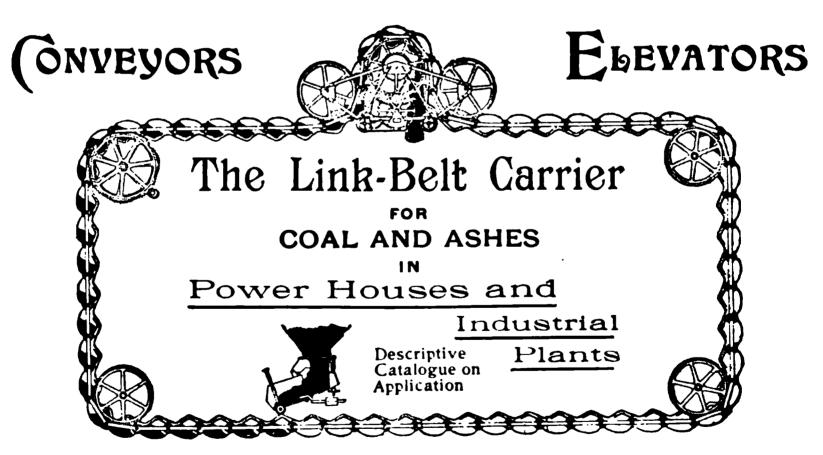

EWART DETACHABLE LINK BELTING

# LINK-BELT ENGINEERING CO.

Nicetown Philadelphia 49 Dey St. New York Park Building Pittsburg

## ----•THE•••••

# WILLIAM (RAMP AND SONS



# BUILDING COMPANY

**PHILADELPHIA** 



